

PRO Dual Bend LED Flex

24V - 20mm x 20mm - Dual Bend - IP67

tagra®

SKU: NEONDUAL2020-5MKIT



Key Features

- Available in 2300K, 2700K, 3000K, 4000K & 6000K
- Cut Anywhere
- Dual Bend
- Up to 820 Lumens per metre
- >90 CRI
- Silicone
- Available in 5M reels
- Max. Run Length 5 Metres
- 5 Year Warranty

Electrical Data

Voltage	Max. Current	Typ. Current	Current 5M	Max. Power	Typ. Power	Power 5M
24V	0.64A/m	0.58A/m	2.9A	15.4W/m	14.0W/m	70W


Photometric Data

Colour Temperature	CCT/Wavelength	Lumens/m	LED Chip	LEDs/m	LEDs/unit
Very Warm White	2300K	703lm	2835	120 LEDs	1 LED
Very Warm White	2700K	741lm	Cut Points	CRI	Beam Angle
Warm White	3000K	779lm	-	>90	120°
Neutral White	4000K	820lm	SDCM	Dimmable	IC Type
Cool White	6000K	820lm	<3	Yes	
			Pixels/m	Pixels/unit	PWM Rate

Mechanical Data

Min. Bend Diameter		Bend Direction	Cable Type	Wire Colours	
200mm (Vertical Bending), 280mm (Horizontal Bending)		Dual	20 AWG	RED	V+ DC
IP Rating	IK Rating	Material	Operating Temperature	BLACK	Ground GND
IP67	IK07	Silicone	-20°C ~ 45°C		
Lifespan	Energy Rating	Warranty	Dimensions		
50,000 Hours	-	5 Years	W20mm x H20mm		

Dimensions

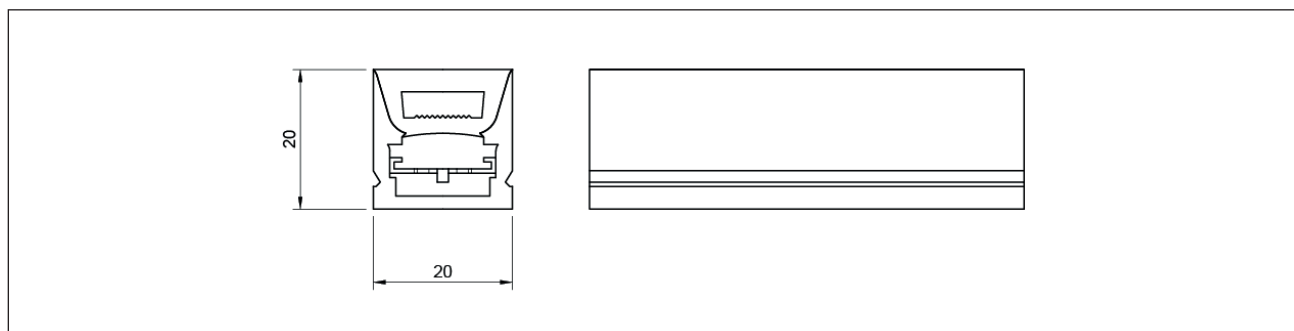

Available SKUs

SKU	CCT	IP Rating	Length
NEONDUAL2020-5MKIT-23K	2300K	IP67	5000mm
NEONDUAL2020-5MKIT-27K	2700K	IP67	5000mm
NEONDUAL2020-5MKIT-3K	3000K	IP67	5000mm
NEONDUAL2020-5MKIT-4K	4000K	IP67	5000mm
NEONDUAL2020-5MKIT-6K	6000K	IP67	5000mm

Available Accessories

Type	SKU	Colour/Material	Note
End Cap	NEONDUAL2020-ENDCAPS-MULTI	Silicone	Pack of 8, 4 Pairs
End Cap	NEONDUAL2020-ENDCAPS-TOP	Silicone	Pack of 8, 4 Pairs
Mounting Bracket	NEONDUAL2020-MOUNT	Aluminium	Pack of 4
Mounting Bracket	NEONDUAL2020-BENDBRACK1M	Aluminium	1000mm Length
Mounting Track	NEONDUAL2020-ALUCHAN1M	Aluminium	1000mm Length