

EC24-27K5M65B



Key Features

- Product Width: 10mm
- Lm/m (up to): 946 Lm/m
- Lm/W (up to): 99 Lm/W
- CRI: 90+
- Lightsource SDCM: ≤5
- Run Length (Max): 5m
- Available Colours: 2700K - 6500K
- Warranty: 3 Years

From 2 Bins

>90 CRI

HORIZ BEND

2oz PCB


IP65

Mechanical Data

Bend Direction	Horizontal
Cable Length	500 mm
Cable Sheath Material	PVC
Cable Weight	20 AWG
LED Chip Brand	SAN'AN
LED Chip Type	COB
Copper Foil Weight	2 oz
Cut Points	50 mm
LED Pitch	2.083333333 mm

LEDs Per Unit	24
LEDs Per Metre	480
LEDs Total	2400
Min · Bend Radius	30 mm
PCB Type	Flexible
Product Weight	380 g
Self Adhesive Brand	JL
Self Adhesive Model Number	4910F
Body Colour	White
Entry Cable Direction	End
Product Dimensions	5000x10x5 mm

**Dimensions**

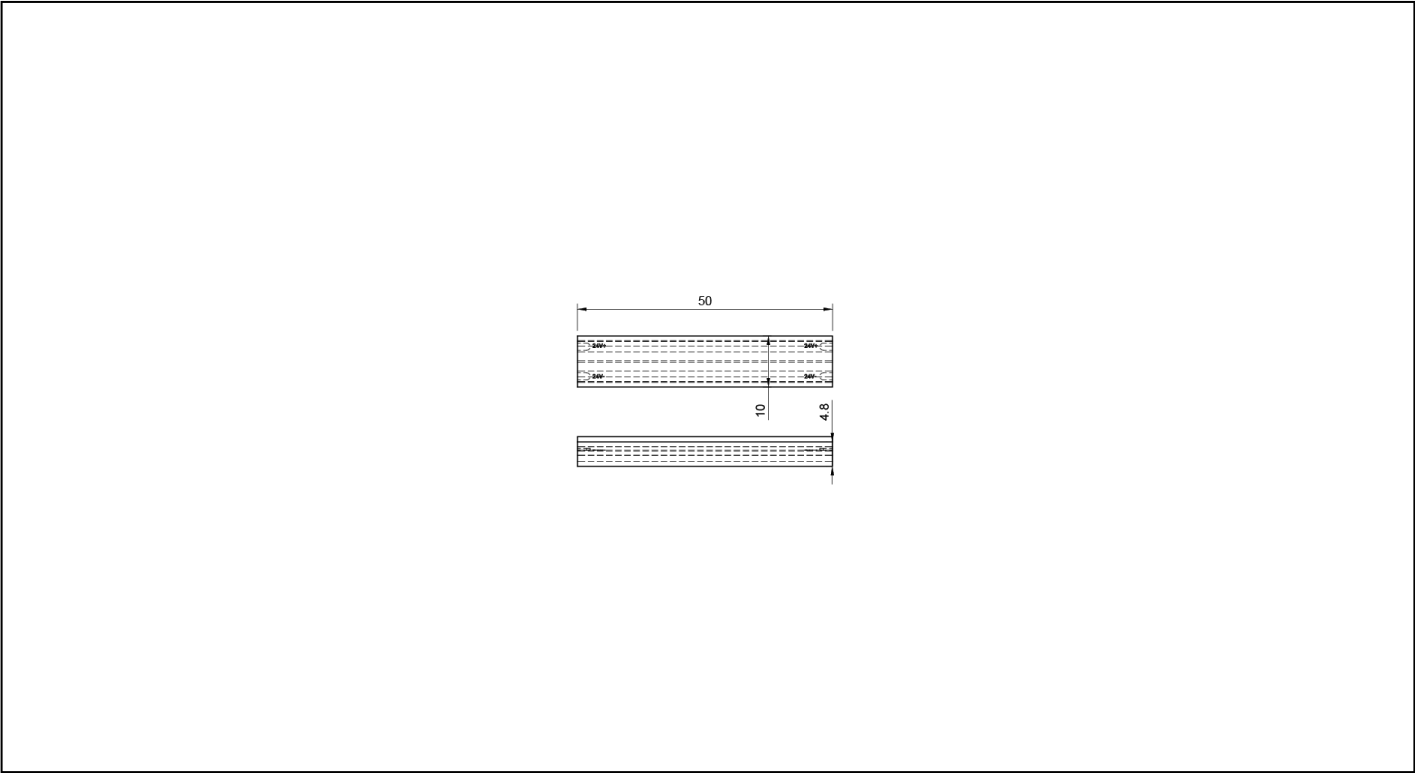

**Input**

Input Voltage	22.8 -25.2 V
---------------	--------------

## Control

Default PWM Frequency	50 Hz
-----------------------	-------

## Electrical Data

Constant Voltage / Constant Current	CV
Current Max · @5 Metre	1.925A
Current Max · Rated	0.44 A
Wattage Max · @1 Metre	10.5 W
Wattage Typ · @1 Metre	9.6 W
Wattage Typ · @5 Metre	42 W
Wattage Typ · @Max Run Length	42 W
Current Typ · @Max Run Length	1.75 A
Max · Run Length	5 m

## Photometric Data

Beam Angle	145 °
Bin Number	2
CRI	90
Luminous Intensity	205.304 cd
Lumen Total	4268 Lm
Peak Luminous Intensity	205.304 cd
SDCM	< 5
Lumens Per Metre	818 Lm/m
Lumens Per Watt	85 Lm/W
Wavelength	583.1 nm
R9 Value	47

CCT

2700 K

Environment

Application Environment	Indoor
Case Temperature Max · (tc)	75 °C
Ingress Protection (IP)	IP65
Interior or Exterior Use	Interior

Efficiency

Energy Efficiency Class	F
L70B50	36000 Hours
L80B10	36000 Hours
L90B10	24000 Hours
LM80	10000Hours
Lumen Maintenance Factor	0.9707
Rated Life	36000 Hours
Survival Factor	0.9
Switch Cycles	10000