


Pro Low Voltage LED Cable

2 Cores - Max. 11 Amps - PVC - 0.5mm²

tagra®

SKU: TC2C.5

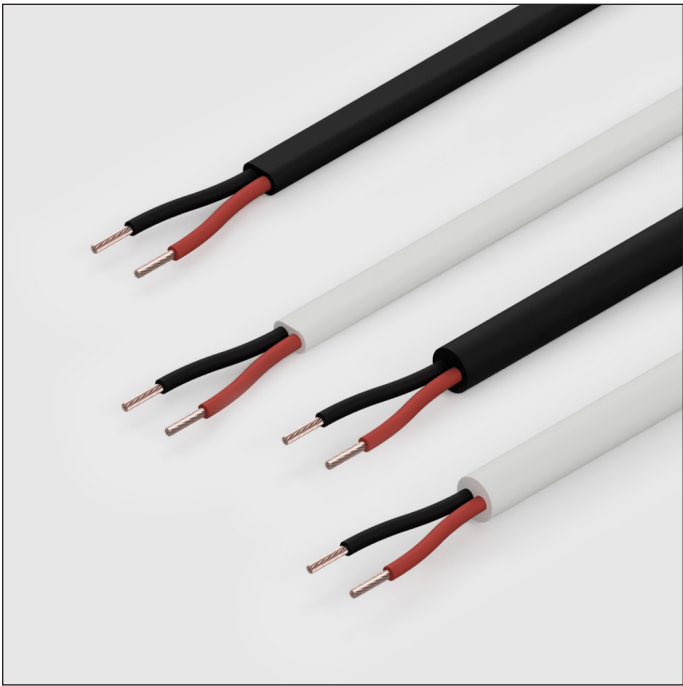

11A
Max.
Per Core

2
Core



PVC

SC

Key Features

- ▶ 11A Current Capacity
- ▶ 60V Voltage Rating
- ▶ Made in the UK
- ▶ Black or White, PVC
- ▶ 10M, 50M & 100M
- ▶ 0.5mm² Conductor

Dimensions



Product Data

Conductor Cores	Conductor Cross Section	Current Rating	Dimensions
2x (16/0.20mm)	0.5mm ²	11.0A per core	-
Manufacture Standards	Conductor	Cable Sheath	
ISO 6722-1:2011 (Class B)	Bare Copper BS EN 60228:2005	PVC	
Voltage Rating	Operating Temp	Flame Propagation	Min. Bend Radius
Max. 60V	-40°C ~ +105°C	ISO 6722-1:2011	30mm
Chemical Resistance to:		BS Softness	Shore A Hardness
Acids, alkalis, alcohols, oils, saltwater		60-65	64-66

Wire Colours	
Red	V+
Black	V-

Available SKUs

SKU	Colour	Shape	Length
TC2CR0.5BLK-10M	Black	Round	10000mm
TC2CR0.5BLK-50M	Black	Round	50000mm
TC2CR0.5BLK-100M	Black	Round	100000mm
TC2CF0.5BLK-10M	Black	Flat	10000mm
TC2CF0.5BLK-50M	Black	Flat	50000mm
TC2CF0.5BLK-100M	Black	Flat	100000mm

SKU	Colour	Shape	Length
TC2CR0.5WHT-10M	White	Round	10000mm
TC2CR0.5WHT-50M	White	Round	50000mm
TC2CR0.5WHT-100M	White	Round	100000mm
TC2CF0.5WHT-10M	White	Flat	10000mm
TC2CF0.5WHT-50M	White	Flat	50000mm
TC2CF0.5WHT-100M	White	Flat	100000mm