


Pro Low Voltage LED Cable

4 Cores - Max. 7 Amps - PVC - 0.35mm²

tagra®

SKU: TC4C.35

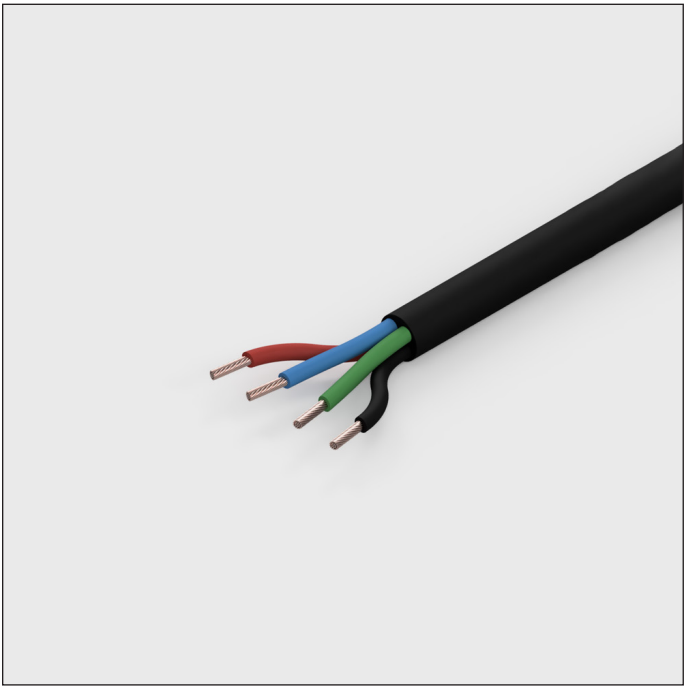

7A
Max.
Per Core

4
Core

PVC

RGB

Key Features

- ▶ 7A Current Capacity


▶ 60V Voltage Rating

▶ Made in the UK
- ▶ Black, PVC

▶ 10M, 50M & 100M

▶ 0.35mm² Conductor

Dimensions

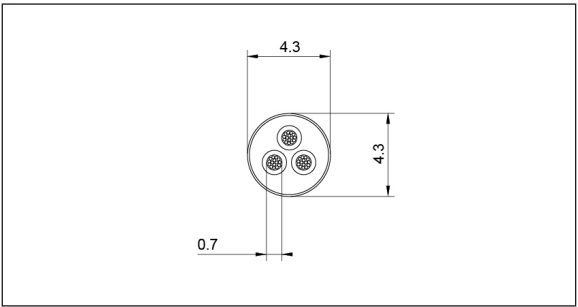

Product Data

Conductor Cores	Conductor Cross Section	Current Rating	Dimensions	Wire Colours	
4x (12/0.20mm)	0.35mm ²	7.0A per core	Ø4.3mm	Black	V+
Manufacture Standards		Conductor	Cable Sheath	Red	R-
ISO 6722-1:2011 (Class B)		Bare Copper BS EN 60228:2005	PVC	Green	G-
Voltage Rating		Operating Temp	Flame Propagation	Blue	B-
Max. 60V		-40°C ~ +105°C	ISO 6722-1:2011		
Min. Bend Radius					
30mm					
Chemical Resistance to:		BS Softness	Shore A Hardness		
Acids, alkalis, alcohols, oils, saltwater		60-65	64-66		

Available SKUs

SKU	Colour	Dimensions	Length
TC4CR0.35BLK-10M	Black	Ø4.3mm	10000mm
TC4CR0.35BLK-50M	Black	Ø4.3mm	50000mm
TC4CR0.35BLK-100M	Black	Ø4.3mm	100000mm