


Pro Low Voltage LED Cable

6 Cores - Max. 7 Amps - PVC - 0.35mm²

tagra®

SKU: TC6C.35

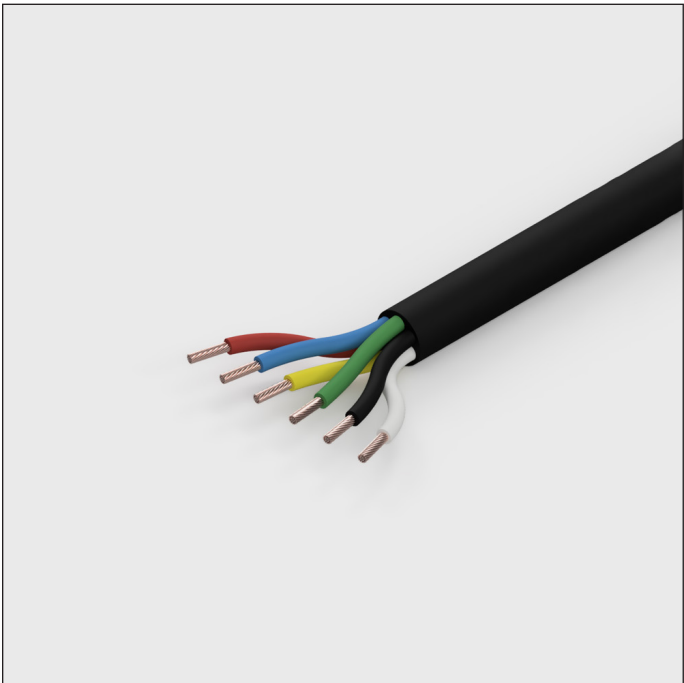

7A
Max.
Per Core

6
Core


PVC

RGB
+CCT

Key Features

- ▶ 7A Current Capacity
- ▶ 60V Voltage Rating
- ▶ Made in the UK
- ▶ Black, PVC
- ▶ 10M, 50M & 100M
- ▶ 0.35mm² Conductor

Dimensions

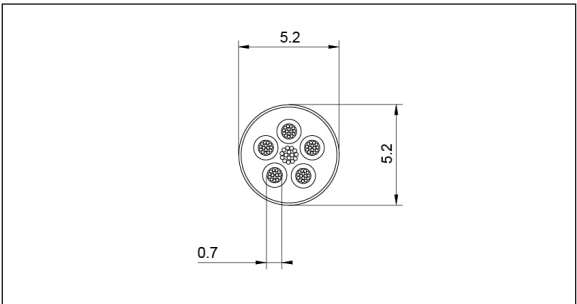

Product Data

Conductor Cores	Conductor Cross Section	Current Rating	Dimensions	Wire Colours	
6x (12/0.20mm)	0.35mm ²	7.0A per core	Ø5.2mm	Black	V+
Manufacture Standards		Conductor	Cable Sheath	Red	R-
ISO 6722-1:2011 (Class B)		Bare Copper BS EN 60228:2005	PVC	Green	G-
Voltage Rating	Operating Temp	Flame Propagation	Min. Bend Radius	Blue	B-
Max. 60V	-40°C ~ +105°C	ISO 6722-1:2011	36mm	White	W-
Chemical Resistance to:		BS Softness	Shore A Hardness	Yellow	WW-
Acids, alkalis, alcohols, oils, saltwater		60-65	64-66		

Available SKUs

SKU	Colour	Dimensions	Length
TC6CR0.35BLK-10M	Black	Ø5.2mm	10000mm
TC6CR0.35BLK-50M	Black	Ø5.2mm	50000mm
TC6CR0.35BLK-100M	Black	Ø5.2mm	100000mm