

MINIF-B-4K24-TRIAC



Key Features

- Mounting Type: Plaster In
- Lm (up to): 800 Lm
- CRI: 90+
- Ingress Protection (IP): 20, 65
- CCT (Min/Max): 3000K, 4000K
- Available Beam Angles: 15°; 24°; 36°
- Warranty: 2 Year(s)


>90
CRI

IP20

Mechanical Data

Body Colour	Black
LED Chip Type	TYF
Product Dimensions	undefinedxundefinedx28 mm

Dimensions

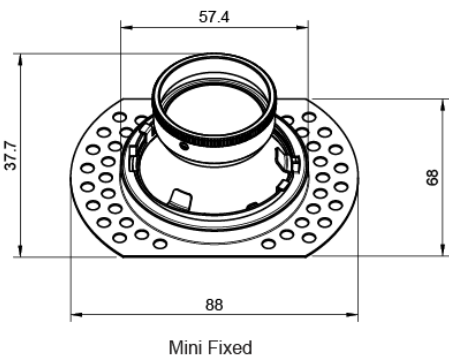

Input

Input Current Type	AC
Input Voltage	198 -264 V

Photometric Data

Beam Angle	24 °
CRI	90
Lumen Total	800 Lm
CCT	4000 K

Environment

Ingress Protection (IP)	IP20
-------------------------	------