

MINIF-W-4K24-TRIAC



Key Features

- Mounting Type: Plaster In
- Lm (up to): 800 Lm
- CRI: 90+
- Ingress Protection (IP): 20, 65
- CCT (Min/Max): 3000K, 4000K
- Available Beam Angles: 15°; 24°; 36°
- Warranty: 2 Year(s)


>90  
CRI

IP20

Mechanical Data

|                    |                           |
|--------------------|---------------------------|
| Body Colour        | White                     |
| LED Chip Type      | TYF                       |
| Product Dimensions | undefinedxundefinedx28 mm |

Dimensions

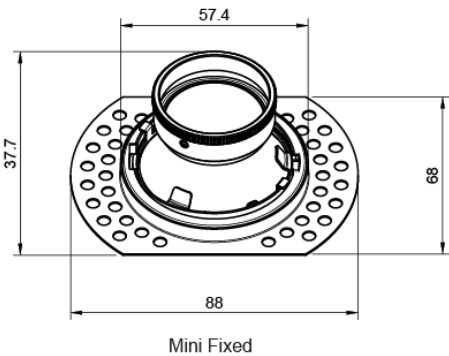

Input

|                    |            |
|--------------------|------------|
| Input Current Type | AC         |
| Input Voltage      | 198 -264 V |

Photometric Data

|             |        |
|-------------|--------|
| Beam Angle  | 24 °   |
| CRI         | 90     |
| Lumen Total | 800 Lm |
| CCT         | 4000 K |

Environment

|                         |      |
|-------------------------|------|
| Ingress Protection (IP) | IP20 |
|-------------------------|------|