

SYN-24V-60WB



IP20	5 YEAR	60W Max.
-------------	-------------------	---------------------

Key Features

- **Available Wattages:** 30W, 60W, 80W
- **Output Voltage (Max):** 24V
- **Input Voltage (Max):** 240V - 264V
- **Max Output Current Per Channel:** 30W 1.25A, 60W 2.5A, 80W 3.33A
- **Ingress protection (IP):** 20
- **Body Material:** Plastic
- **Warranty:** 5 Years

Mechanical Data			
Body Colour	White	Product Weight	185 g
Product Dimensions	176x60x16 mm		

Electrical Data			
Constant Voltage / Constant Current	CV	Wattage	60 W

Input Data			
Input Terminal / Connector Type	Syndeo	No. of Input Terminals	1
Power Factor	0.95 A	THD	10 %
Input Frequency	50 - 60 Hz	Input Voltage	198 -264 V
Input Current	0.33 A	Inrush Current	38 A
Leakage Current	0.7 mA	Displacement Factor	0.95


Output Data

Control Data			
Dimming Type	PWM	Interface Type	Terminal
Dimming Range	0 - 100 %	Dimmable	Yes

Environment Data			
Body Material	Plastic	Ingress Protection (IP)	IP20
Interior or Exterior Use	Interior		

Protection Data			
Electrical Safety Class	II	Over Current Protection	Yes
Over Voltage Protection	Yes	Short Circuit Protection	Yes
Short Circuit Protection Mode	Hiccup		

Efficiency Data			
No-Load Power Consumption	0.5 W	Rated Life	50000 Hours
Standby Power Max	0.5 W	Startup Time	0.5 Secs
Average Active Efficiency	87	Efficiency @ 10% Load	72.1
Efficiency @ 50% Load	85	Efficiency @ Full Load	88

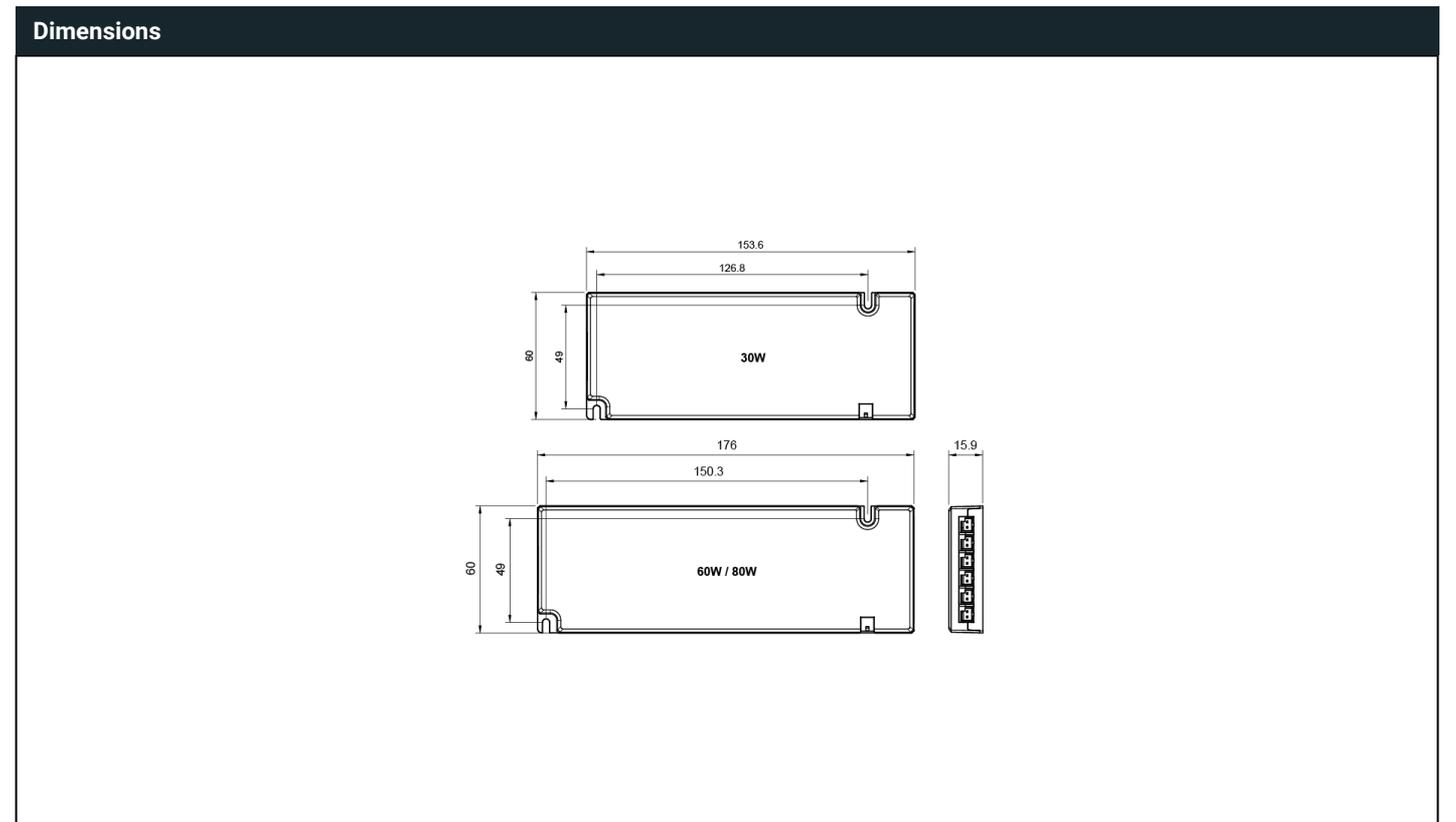

Packaging & Shipping Data	
Power Cord Included	Yes

Disclaimer

Ultra LEDs have taken reasonable care to ensure that the information in this datasheet is accurate at time of publication however it should be noted that all specifications are subject to tolerance. Descriptive specifications such as colour are subjective. Ultra LEDs reserve the right to update specifications without notice. The information in the datasheet may only be relied on by customers of Ultra LEDs in accordance with applicable terms and conditions.