


Syndeo Plug & Play Mini Horizontal Bend LED Flex

24V - 4mm x 10mm - Horizontal Bend - IP65

tagra®

SKU: PPS24-NEONTOP410-5MKIT

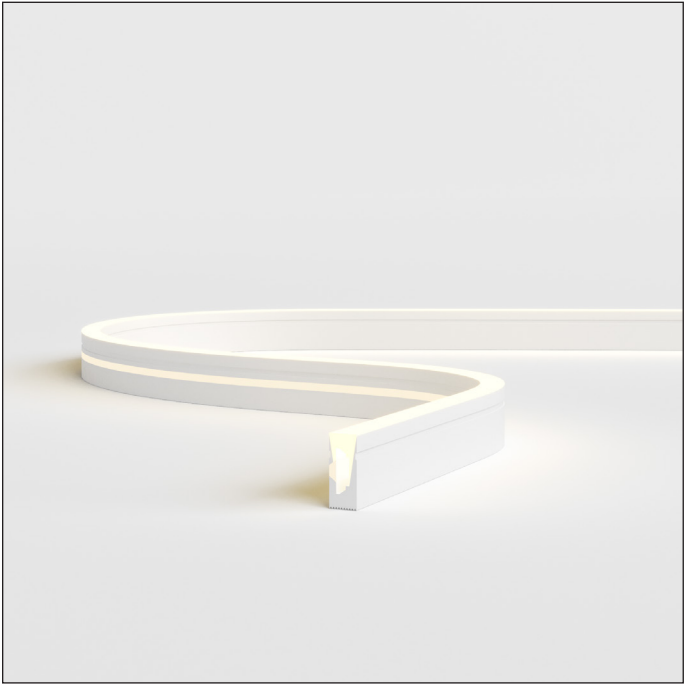

24V



IP65

5M

Key Features

- Available in 2700K & 3000K
- 5.95mm Cut Points
- Horizontal Bend
- 500mm Syndeo Cable
- Up to 270 Lumens per metre
- >90 CRI
- Silicone
- 5 Metre Max. Run Length
- Available in 5M reels
- 5 Year Indoor / 3 Year Outdoor Warranty

Electrical Data

Voltage	Max. Current	Typ. Current	Current 5M	Max. Power	Typ. Power	Power 5M
24V	0.33A/m	0.3A/m	1.5A	7.9W/m	7.2W/m	36W


Photometric Data

Colour Temperature	CCT/Wavelength	Lumens/m	LED Chip	LEDs/m	LEDs/unit
Very Warm White	2700K	270lm	2835	168 LEDs	1 LEDs
Warm White	3000K	270lm	Cut Points	CRI	Beam Angle
			5.95mm	>90	120°
			SDCM	Dimmable	IC Type
			<3	Yes	
			Pixels/m	Pixels/unit	PWM Rate

Mechanical Data

Min. Bend Diameter	Bend Direction	Cable Length	Cable End	Cable Type	Wire Colours
30mm	Horizontal	500mm	Double	20 AWG	WHITE V+ DC
IP Rating	IK Rating	Material	Operating Temperature		
IP65	IK06	Silicone	-25°C ~ 50°C		
					WHITE DASHED V- DC
Lifespan	Energy Rating	Warranty		Dimensions	
50,000 Hours	-	5 Year Indoor, 3 Year Outdoor		W4mm x H10mm	

Dimensions

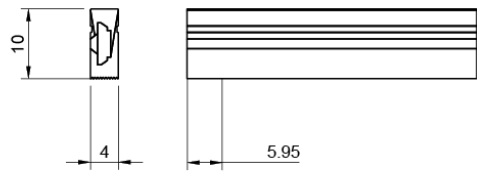

Available SKUs

SKU	CCT	IP Rating	Length
PPS24-27K4105MKIT	2700K	IP65	5000mm
PPS24-3K4105MKIT	3000K	IP65	5000mm

Available Accessories

Type	SKU	Colour/Material	Note
End Cap	0410-ENDCAPS-S	Silicone	Pack of 8
Mounting Bracket	NEONMICRO410/CLIPS	Aluminium	Pack of 10
Mounting Track	NEONMICRO410-ALUCHAN1M	Aluminium	1000mm Length