

SYN-GSLB-3K-SLVR0.9M



Key Features

- Input Voltage (Max): 24V
- Product Dimensions (mm): W10.3xH15.2.
- Available Lengths (mm): 900mm, 2000mm
- Mounting Type: Surface Mounted
- Colour Type: Single Colour
- Diffuser Colour: Opal
- Body Colour: Grey
- Ingress Protection (IP): 20
- Warranty: 7 Years
- Accessories: Additional End Cap & Mounting Clip
- Packs Available

PWM

From 1 Bin

24V


>90 CRI

IP20

Mechanical Data

Cable Sheath Material	PVC
LED Chip Brand	SanAn
LED Module Replaceable	No
Suspension Kit Included	No
Body Colour	Grey
LED Chip Type	2216
Diffuser Material	PC
Entry Cable Direction	Rear
Product Weight	110 g

Dimensions

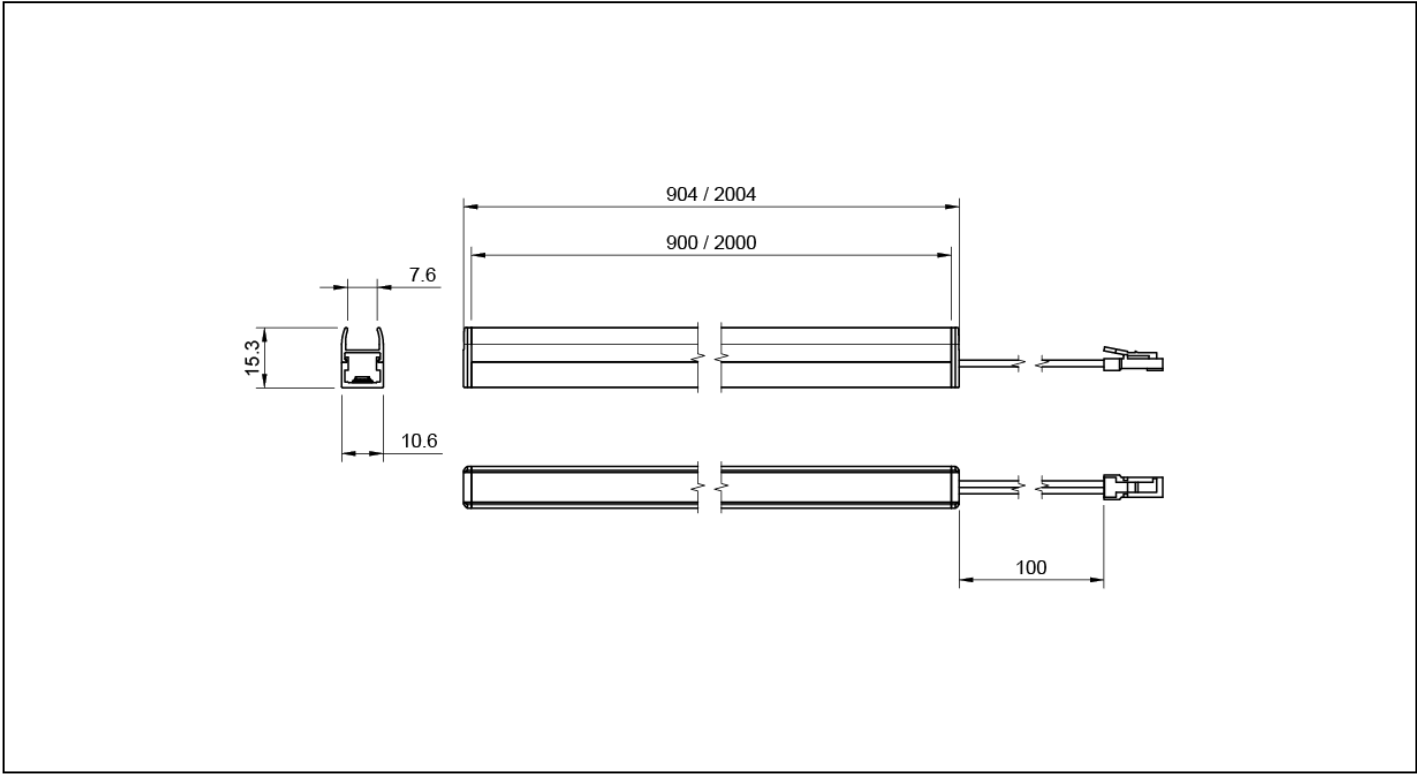

Input

Input Cable Length	100 mm
Input Cable Weight	20 AWG
Input Current	0.36 A
Power Factor	1 A
Input Current Type	DC
Input Voltage	24 V

Control

Dimming Type	PWM
Dimming Range	0 - 100 %

Electrical Data

Constant Voltage / Constant Current	CV
Wattage	8.64 W
<b>Protection</b>	
Electrical Safety Class	III
Over Current Protection	No
Over Temperature Protection	No
Over Voltage Protection	No
Reverse Polarity Protection	No
Short Circuit Protection	No
<b>Photometric Data</b>	
Bin Number	1
Lumens Per Watt	61 Lm/W
Beam Angle	92 °
Colour Type	Single Colour
CRI	90
Diffuser Colour	Opal
Lumen Total	513 Lm
R9 Value	61
SDCM	< 3
CCT	3000 K
<b>Environment</b>	
Anti-Glare	No
Body Finish	oxide
Application Environment	Indoor
Body Material	Aluminium

Ingress Protection (IP)	IP20
Mounting Type	Surface Mounted
<b>Efficiency</b>	
L70B50	50000 Hours
Lumen Maintenance Factor	0.96
Rated Life	50000 Hours
<b>Packaging &amp; Shipping</b>	
Fixings Included	No