


## JOINERY Horizontal Bend LED Flex

24V - 4mm x 10mm - Horizontal Bend - IP65

tagra®

SKU: NEONTOP410-5MKIT

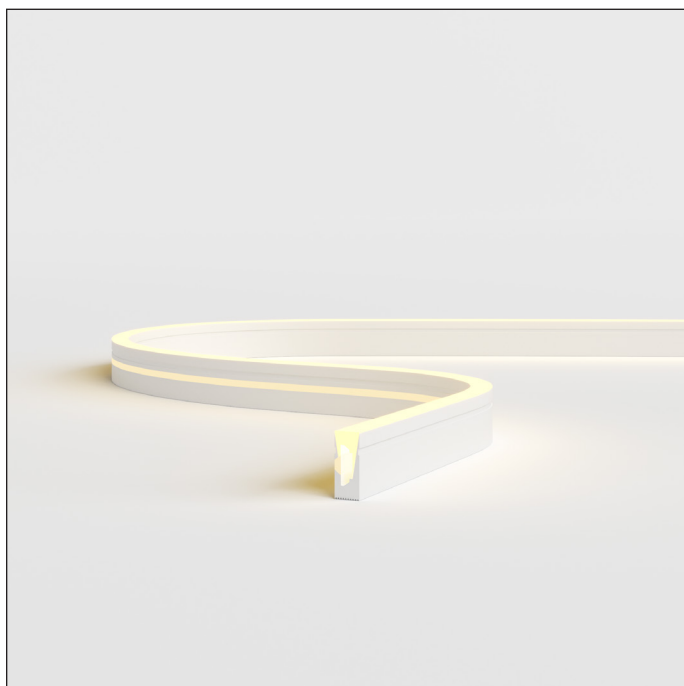

24V



IP65

5M

5YR  
Warranty

### Key Features

- Available in 2700K, 3000K & 4000K
- 5.95mm Cut Points
- Horizontal Bend
- Up to 281 Lumens per metre
- >90 CRI
- Silicone
- 5 Metre Max. Run Length
- Available in 5M reels
- 5 Year Warranty

### Electrical Data

| Voltage | Max. Current | Typ. Current | Current 5M | Max. Power | Typ. Power | Power 5M |
|---------|--------------|--------------|------------|------------|------------|----------|
| 24V     | 0.33A/m      | 0.3A/m       | 1.5A       | 7.9W/m     | 7.2W/m     | 36W      |


### Photometric Data

| Colour Temperature | CCT/Wavelength | Lumens/m | LED Chip   | LEDs/m      | LEDs/unit  |
|--------------------|----------------|----------|------------|-------------|------------|
| Very Warm White    | 2700K          | 270lm    | 2835       | 168 LEDs    | 1 LEDs     |
| Warm White         | 3000K          | 270lm    | Cut Points | CRI         | Beam Angle |
| Neutral White      | 4000K          | 281lm    | 5.95mm     | >90         | 120°       |
|                    |                |          | SDCM       | Dimmable    | IC Type    |
|                    |                |          | <3         | Yes         |            |
|                    |                |          | Pixels/m   | Pixels/unit | PWM Rate   |
|                    |                |          |            |             |            |

### Mechanical Data

| Min. Bend Diameter | Bend Direction | Cable Length | Cable End             | Cable Type | Wire Colours     |
|--------------------|----------------|--------------|-----------------------|------------|------------------|
| 30mm               | Horizontal     | 2000mm       | Double                | 20 AWG     | RED V+ DC        |
| IP Rating          | IK Rating      | Material     | Operating Temperature |            | BLACK Ground GND |
| IP65               | IK06           | Silicone     | -25°C ~ 50°C          |            |                  |
| Lifespan           | Energy Rating  | Warranty     | Dimensions            |            |                  |
| 50,000 Hours       | -              | 5 Years      | W4mm x H10mm          |            |                  |
|                    |                |              |                       |            |                  |
|                    |                |              |                       |            |                  |
|                    |                |              |                       |            |                  |

Dimensions

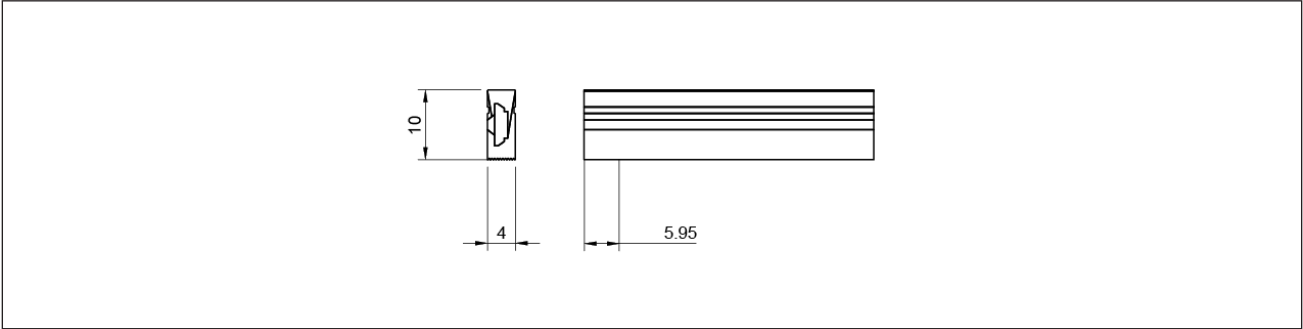

Available SKUs

| SKU                  | CCT   | IP Rating | Length |
|----------------------|-------|-----------|--------|
| NEONTOP410-5MKIT-27K | 2700K | IP65      | 5000mm |
| NEONTOP410-5MKIT-3K  | 3000K | IP65      | 5000mm |
| NEONTOP410-5MKIT-4K  | 4000K | IP65      | 5000mm |
|                      |       |           |        |
|                      |       |           |        |
|                      |       |           |        |

Available Accessories

| Type             | SKU                    | Colour/Material | Note          |
|------------------|------------------------|-----------------|---------------|
| End Cap          | 0410-ENDCAPS-S         | Silicone        | Pack of 8     |
| Mounting Bracket | NEONMICRO410/CLIPS     | Aluminium       | Pack of 10    |
| Mounting Track   | NEONMICRO410-ALUCHAN1M | Aluminium       | 1000mm Length |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |
|                  |                        |                 |               |