


Professional Dual Bend LED Flex

24V - 10mm x 10mm - Dual Bend - IP67

tagra®

SKU: NEONDUAL1010B

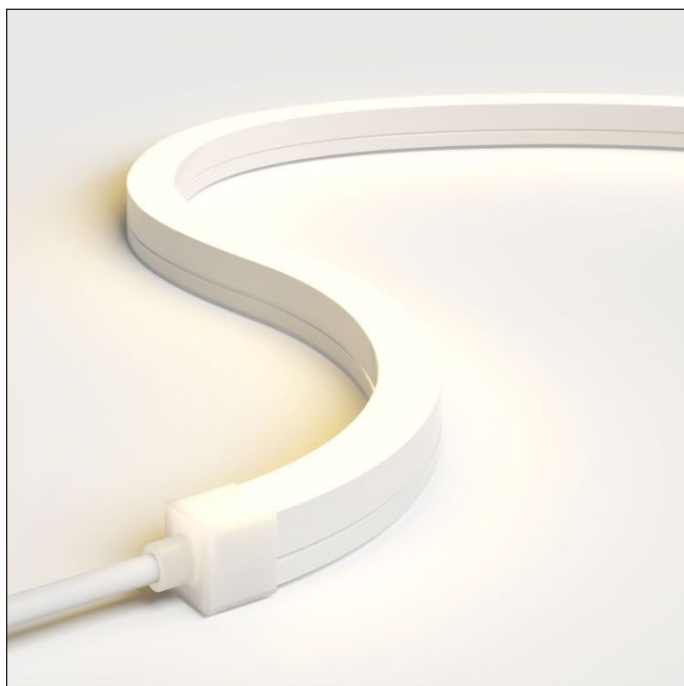

24V



IP67

5YR
Warranty

Key Features

- Available in 2300K, 2700K, 3000K, 4000K & 6000K
- Cut Anywhere
- Dual Bend
- Up to 480 Lumens per metre
- >90 CRI
- Silicone
- Available in 5M & 30M reels
- 5 Year Warranty

Electrical Data

Voltage	Max. Current	Typ. Current	Current 5M	Max. Power	Typ. Power	Power 5M
24V	0.36A/m	0.33A/m	1.65A	8.8W/m	8.0W/m	40W


Photometric Data

Colour Temperature	CCT/Wavelength	Lumens/m	LED Chip	LEDs/m	LEDs/unit
Very Warm White	2300K	360lm	2216	240 LEDs	2
Very Warm White	2700K	430lm	Cut Points	CRI	Beam Angle
Warm White	3000K	455lm	-	>90	120°
Neutral White	4000K	480lm	SDCM	Dimmable	IC Type
Cool White	6000K	480lm	<3	Yes	
			Pixels/m	Pixels/unit	PWM Rate

Mechanical Data

Min. Bend Diameter	Bend Direction	Cable Length	Cable Type	Cable End	Wire Colours
120mm (vertical), 120mm (horizontal)	Dual	1000mm	20 AWG	Double	RED V+ DC
IP Rating	IK Rating	Material	Operating Temperature		
IP67	IK06	Silicone	-20°C ~ 45°C		
Lifespan	Energy Rating	Warranty	Dimensions		
50,000 Hours	-	5 Years	W10mm x H10mm		

Dimensions

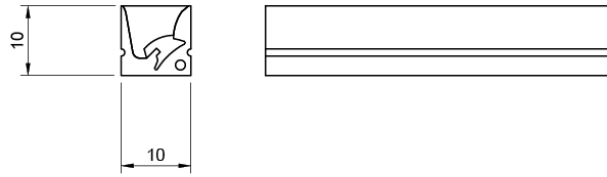

Available SKUs

SKU	CCT	IP Rating	Length
NEONDUAL1010-5MKIT-23KB	2300K	IP67	5000mm
NEONDUAL1010-5MKIT-27KB	2700K	IP67	5000mm
NEONDUAL1010-5MKIT-3KB	3000K	IP67	5000mm
NEONDUAL1010-5MKIT-4KB	4000K	IP67	5000mm
NEONDUAL1010-5MKIT-6KB	6000K	IP67	5000mm
NEONDUAL1010-30M-23KB	2300K	IP67	30000mm
NEONDUAL1010-30M-27KB	2700K	IP67	30000mm
NEONDUAL1010-30M-3KB	3000K	IP67	30000mm
NEONDUAL1010-30M-4KB	4000K	IP67	30000mm
NEONDUAL1010-30M-6KB	6000K	IP67	30000mm

Available Accessories

Type	SKU	Colour/Material	Note
End Cap	NEONDUAL1010-ENDCAPS-MULTI	Silicone	Pack of 8, 4 Pairs
End Cap	NEONDUAL1010-ENDCAPS-TOP	Silicone	Pack of 8, 4 Pairs
Mounting Bracket	NEONDUAL1010-MOUNT	Aluminium	Pack of 4
Mounting Bracket	NEONDUAL1010-BENDBRACK1M	Aluminium	1000mm Length
Mounting Track	NEONDUAL1010-ALUCHAN1M	Aluminium	1000mm Length