

Key Features & Benefits:

- Field Selectable Kelvin 2700K–3000K–3500K–4000K–5000K
- Slim, No Driver Design
- Flicker Free
- Compatible with 3/0 & 4/0 J-Boxes
- Triac Dimmable (120V)
- Time Saving Four Port Connectors Included
- Indoor Surface Mount for Ceiling or Wall
- Closet Rated–Suitable for use in closets when installed in accordance with NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5)

Project:

Date:

Catalog #:

Notes:

Product Specifications:

Wattage: 15W
 Selectable Kelvin: 2700K–3000K–3500K–4000K–5000K
 Max Lumen Output: 1,100 Lumens
 Max Efficacy: 67 lm/W
 Voltage: 120 VAC
 Input Frequency: 50/60 Hz
 Surge Protection: No
 Power Factor: >0.9
 Operating Temperature: -4°F to 104°F (-20 to 40)
 Dimming: Triac 120 VAC
 Dimming Range: 10–100%
 CRI: >90
 Beam Angle: 110°
 Dimensions: L403" x W405" x 7.32" x H0.94"
 Weight (lbs): 0.4144
 Finish: BZ (Bronze)
 L70 Lifetime Calculated per TM21: 50,000 hours
 Warranty: 5 Year



Ordering Guide:

ESL	TYPE	SIZE	WATTS	GEN	SELECTABLE KELVIN	FINISH
ESL	DSK	6	15W	4	2750	BZ
	(DSK) Disk Light	(4) Round 4 inch (6) Round 6 inch	(10W) 10 Watts (15W) 15 Watts	(4) 4th Gen	(2750) 2700K–3000K–3500K–4000K–5000K	(BLANK) White (BZ) Bronze


Catalog Data:

ITEM#	WATTS	SELECTABLE KELVIN	MAX LUMEN OUTPUT	EFFICACY (lm/W)	DIMENSIONS
ESL-DSK-4-10W-42750	10W	2700K	600	60	Ø5.98" x H 0.95"
		3000K	620	62	
		3500K	610	61	
		4000K	630	63	
		5000K	660	66	
ESL-DSK-4-10W-42750-BZ	10W	2700K	600	60	Ø5.98" x H 0.95"
		3000K	620	62	
		3500K	610	61	
		4000K	630	63	
		5000K	660	66	
ESL-DSK-6-15W-42750	15W	2700K	950	63	Ø7.32" x H 0.95"
		3000K	1050	70	
		3500K	950	63	
		4000K	1000	67	
		5000K	1100	73	
ESL-DSK-6-15W-42750-BZ	15W	2700K	950	63	Ø7.32" x H 0.95"
		3000K	1050	70	
		3500K	950	63	
		4000K	1000	67	
		5000K	1100	73	
ESL-DSK-6-15W-42750-CP24 [†]	15W	2700K	950	63	Ø7.32" x H 0.95"
		3000K	1050	70	
		3500K	950	63	
		4000K	1000	67	
		5000K	1100	73	

[†]Contractor Pack is only available in White and 6 inch size.

Electrical Data:

SYSTEM WATTS	INPUT VOLTAGE	INPUT FREQUENCY	CRI	POWER FACTOR	OPERATING TEMPERATURE	DIMMING
10	120 VAC	50/60 Hz	90+	>0.9	-4°F to 104°F (-20°C to 40°C)	Triac Dimming 10–100%
15	120 VAC	50/60 Hz	90+	>0.9	-4°F to 104°F (-20°C to 40°C)	Triac Dimming 10–100%

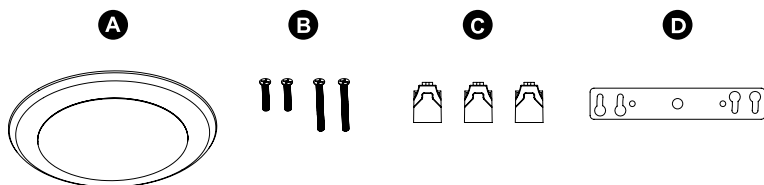What's Included:


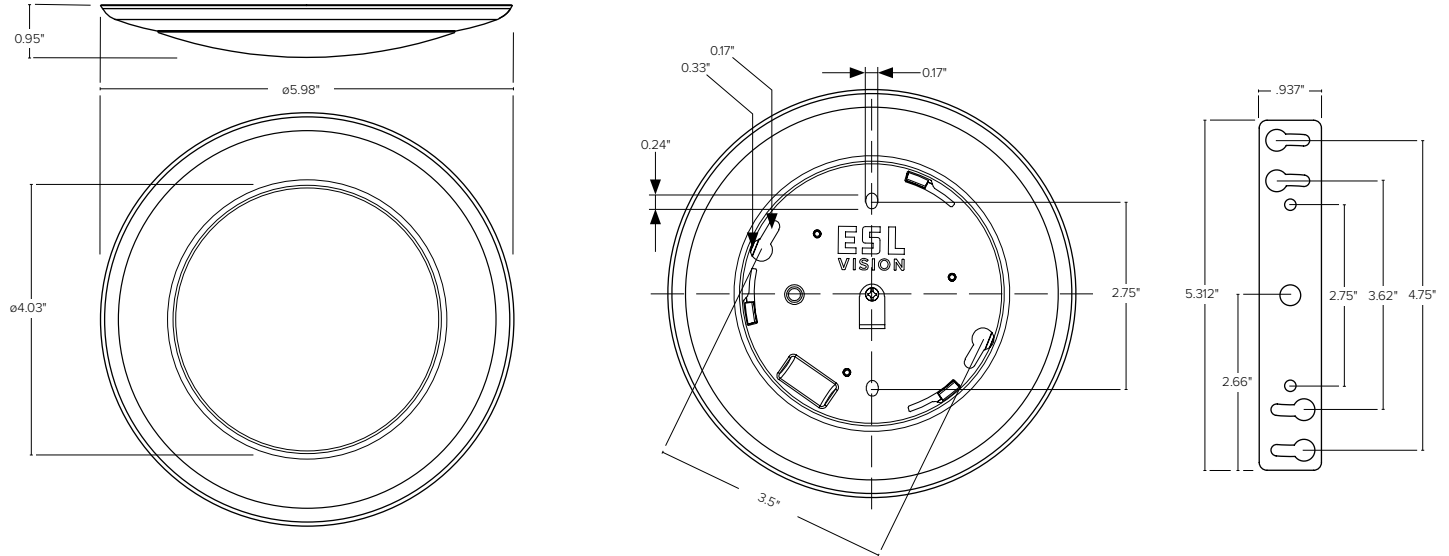
PART	DESCRIPTION	QUANTITY
A	6 Inch Disk Light	1
B	Mounting Screws	4
C	4 Port Connectors	3
D	Mounting Plate	1

Compatible Dimmers:


COMPATIBLE DIMMERS	
MACL-153MR-WH LUTRON	CL-6674 LEVITON
SCL-153P LUTRON	CL-6683 LEVITON
G-600PH-LA LUTRON	IPL06 LEVITON
DVCL-153P LUTRON	CL-6672 LEVITON
MACL-153ME LUTRON	153M-ES LEVITON
DV-600P LUTRON	

Dimensions:

4" Disk




6" Disk

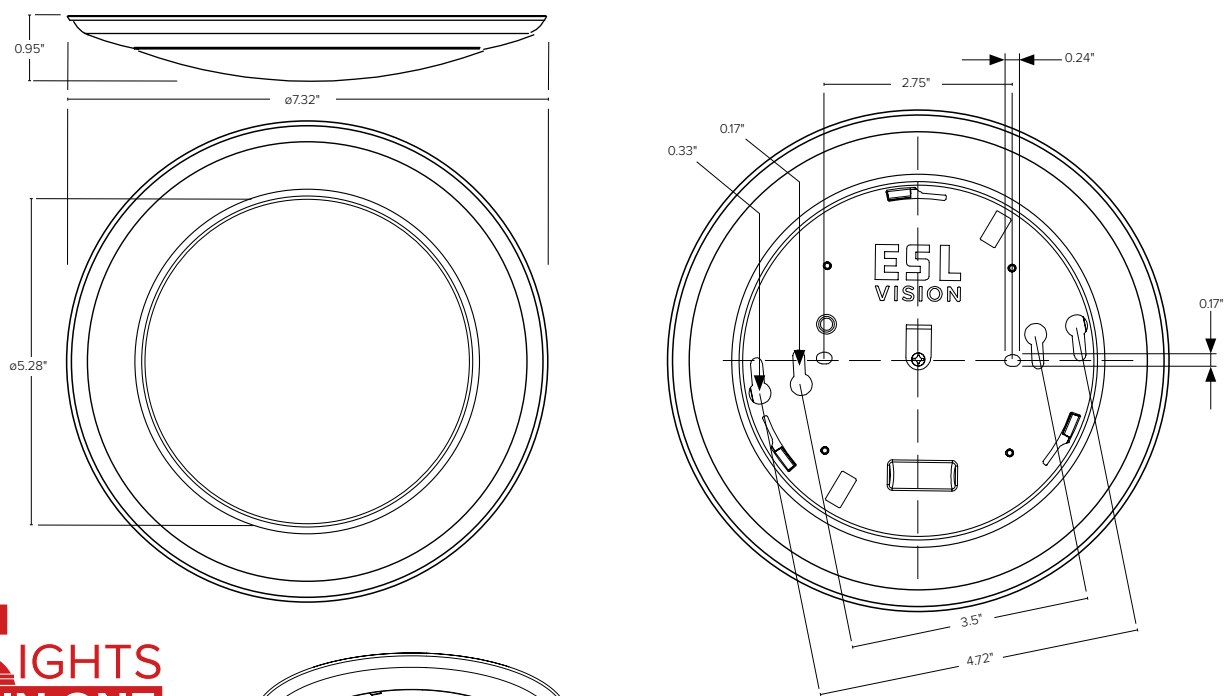


5 LIGHTS
IN ONE

**5 CCT Selectable
Switch**




Installation:


Suitable for Ceiling or Wall Mount

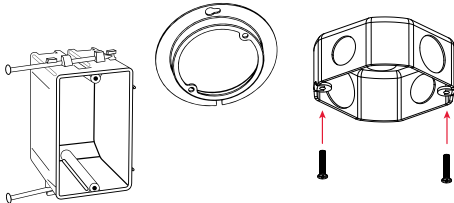


1 Insert the included mounting screws into the junction box. Fixtures are compatible with single gang, 3.5" and 4" J boxes as well as single gang mud rings. The 4" fixture requires the included mounting bracket for 3.5" and 4" J boxes.




2 Remove the lens from the fixture by twisting it counter clockwise.




3 Locate the CCT switch on the center of the disk and select your desired setting.



4 Use included 4-port connectors to connect the wires. Ensure the copper ground is secure. Arrange the wires into the back of the junction box.



5 Align the holes on the fixture with the mounting screws. Attach the fixture to the junction box by twisting clockwise until it locks into place.



6 Reinstall the lens onto the fixture by rotating it clockwise until it locks in place.