



HALF-MOON WALL PACK

ESL-WPHM-2565W-13050-BZ

Key Features & Benefits:

- Kelvin and Wattage Selectable
- Built-In Replaceable Photocell
- Quick-Mount Plate and Built-in Level
- Visual Comfort Lens
- 10kV Surge Protector
- Available in Bronze and White Finishes
- Customizable Light Settings:
 - Uplight
 - Downlight
 - Bi-Directional

Product Specifications:



Selectable Wattage: 25W–45W–65W
Selectable Kelvin: 3000K–4000K–5000K
Max Lumen Output: 9,100 Lumens
Max Efficacy: 124 lm/W
Voltage: 120–277 VAC
Input Frequency: 50/60 Hz
Surge Protection: 10kV Stand Alone
Power Factor: ≥0.94
THD: ≤10%
Operating Temperature: -40°F to 104°F (-40°C to 40°C)
Dimming: 0–10V
Dimming Range: Dim to Off
Dim to Off: true
CRI: >70
Dimensions: L18.11" x W9.25" x H7.09"
Weight (lbs): 12.35
Finish: BZ (Bronze)
L70 Lifetime Calculated per TM21: 90,000 hours
Warranty: 7 Year

Project: _____

Date: _____

Catalog #: _____

Notes: _____

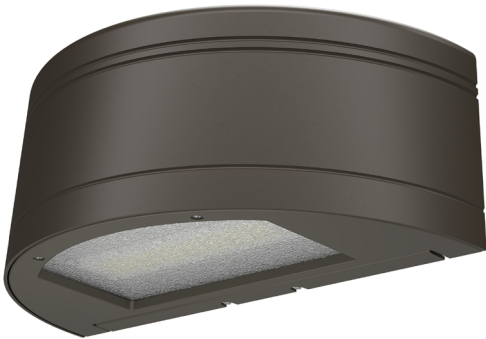

Ordering Guide:

ESL	TYPE	SELECTABLE WATTAGE	GEN	SELECTABLE KELVIN	FINISH
ESL	WP	2565W	1	3050	BZ
(WPHM) Wall Pack Half Moon (2565W) 25W–45W–65W (1) 1st Gen (3050) 3000K–4000K–5000K (BZ) Bronze (WH) White					

FACTORY INSTALLED OPTIONS

EM9

Emergency Backup Battery Unit, Auto Test Function, 9 Watts Output, 90 Minutes Minimum, 120–277 VAC Input, 10–300 VDC Output, Open Terminal Block Wiring, UL Listed for Factory or Field Install, Title 20

Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	DIMENSIONS (LxWxH)	DLC QPL CODE
ESL-WPHM-2565W-13050-BZ	25W–45W–65W	3000K–4000K–5000K	9,100	124	9.25" x 18.1" x 7.1"	S-4F1TT1
ESL-WPHM-2565W-13050-WH	25W–45W–65W	3000K–4000K–5000K	9,100	124	9.25" x 18.1" x 7.1"	S-4F1TT1


Photometrics:

LEGEND

- 20 fc
- 10 fc
- 5 fc
- 1 fc
- 0.5 fc
- 0.1 fc
- 50% Max Cd
- Max Cd

Distances are based on units of 25' mounting height

Half-Moon Wall Pack
ESL-WPHM-2565W-13050-XX
(based on 65W and 4000K)

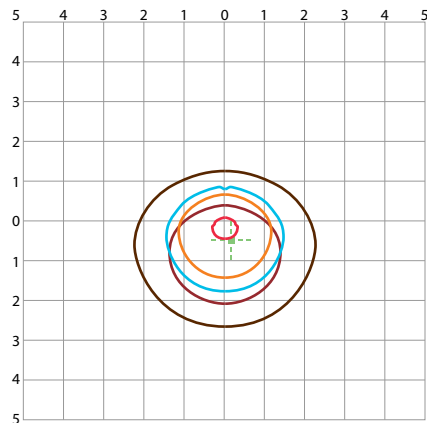


LCS Table

Half-Moon Wall Pack
ESL-WPHM-2565W-13050-XX – BUG Rating: B3–U2–G1
(based on 65W and 4000K)

	BUG Rating	Lumens	Lumens%
Forward Light	Low (0–30)	1,556.6	18.2%
	Medium (30–60)	3,408.1	39.8%
	High (60–80)	1,104.1	12.9%
	Very High (80–90)	76.2	0.9%
Back Light	Low (0–30)	1,063.2	12.4%
	Medium (30–60)	1,101.6	12.9%
	High (60–80)	188.4	2.2%
	Very High (80–90)	20.9	0.2%
Uplight	Low (90–100)	11.5	0.1%
	High (100–180)	29.1	0.3%
Trapped Light		8.0	0.1%

Dimensions:

Half-Moon Wall Pack
ESL-WPHM-2565W-13050-XX

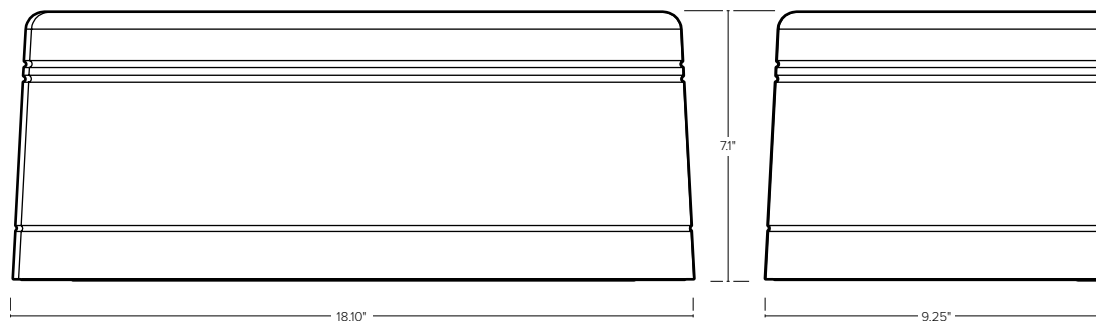

Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT	LUMEN MULTIPLIER
0 °C 32 °F	1.02
10 °C 50 °F	1.01
20 °C 68 °F	1.00
25 °C 77 °F	1.00
30 °C 86 °F	1.00
40 °C 104 °F	0.99
50 °C 122 °F	0.96