


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz Lamp Flux:4855.16x1 lm		
Name: J-WL4FT	Type: LED	
MFR.:		

DATA OF LAMP		PHOTOMETRIC DATA Eff: 122.93 lm/W			
MODEL		I <sub>max</sub> (cd)	1829	S/MH(C0/180)	1.15
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	4855.2	η UP,DN(C0-180)	0.6,49.3
NOMINAL FLUX(lm)	4855.16	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,49.3
LAMPS INSIDE	1	η up(%)	1.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down(%)	98.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

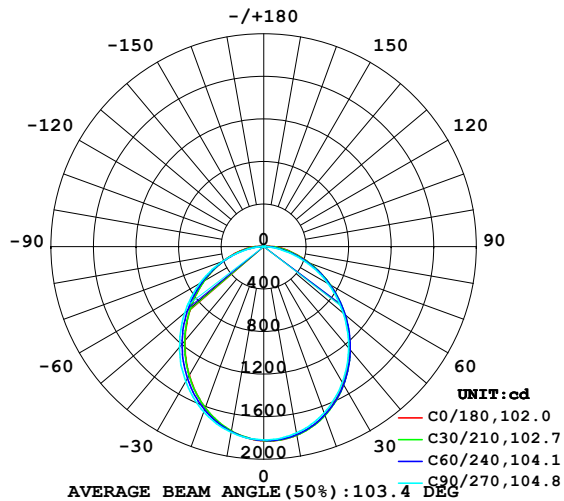

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

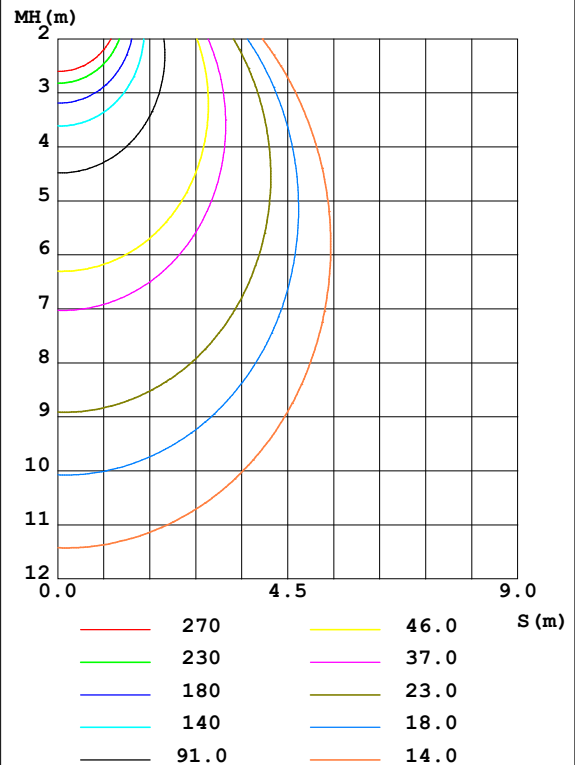

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-01-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:8.000m [K=0.7125]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	1799	1797	1780	1749	1761	1762	1774	1789	0- 10	171.6	171.6	3.53,3.53
20	1683	1686	1663	1605	1612	1621	1653	1683	10- 20	485.5	657.1	13.5,13.5
30	1493	1502	1478	1400	1399	1419	1466	1504	20- 30	718.6	1376	28.3,28.3
40	1252	1266	1243	1157	1153	1177	1233	1273	30- 40	839.3	2215	45.6,45.6
50	987.0	1001	979.1	897.4	896.5	918.7	970.7	1011	40- 50	840.6	3056	62.9,62.9
60	718.2	724.2	700.2	635.9	646.4	658.1	696.6	740.8	50- 60	736.6	3792	78.1,78.1
70	459.2	450.3	417.8	381.8	410.1	404.9	418.5	472.0	60- 70	551.7	4344	89.5,89.5
80	241.6	205.7	153.6	163.5	212.8	182.6	155.2	225.4	70- 80	322.5	4666	96.1,96.1
90	88.69	52.19	3.318	35.44	76.67	45.71	8.390	64.54	80- 90	119.7	4786	98.6,98.6
100	20.07	8.854	3.812	5.618	17.32	10.80	8.928	15.61	90-100	26.56	4813	99.1,99.1
110	6.658	4.983	5.022	4.208	9.863	8.779	8.505	10.72	100-110	8.744	4821	99.3,99.3
120	6.152	5.074	5.757	4.840	8.931	9.017	8.862	10.42	110-120	7.242	4829	99.5,99.5
130	6.559	5.337	6.380	6.185	8.965	9.798	9.171	10.43	120-130	6.829	4836	99.6,99.6
140	6.872	5.543	7.106	7.326	9.290	10.44	9.235	10.44	130-140	6.227	4842	99.7,99.7
150	7.448	6.327	8.212	8.602	9.929	10.98	9.859	11.13	140-150	5.495	4847	99.8,99.8
160	9.011	8.077	9.639	8.411	9.291	10.54	11.30	10.63	150-160	4.302	4852	99.9,99.9
170	8.156	8.433	10.44	8.537	8.119	9.685	11.35	9.928	160-170	2.702	4854	100,100
180	8.461	10.31	10.77	10.79	8.470	10.36	10.95	10.80	170-180	0.9049	4855	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2642.2 lm

%lum = 54.4%

%lamp = 54.4%

Conical surface Flux(120deg): 3792.2 lm

%lum = 78.1%


%lamp = 78.1%

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:DAMIN  
 Test Date:2024-01-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity:65.0%  
 Test Distance:8.000m [K=0.7125]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz Lamp Flux:4855.16x1 lm		
Name: J-WL4FT	Type: LED	
MFR.:		

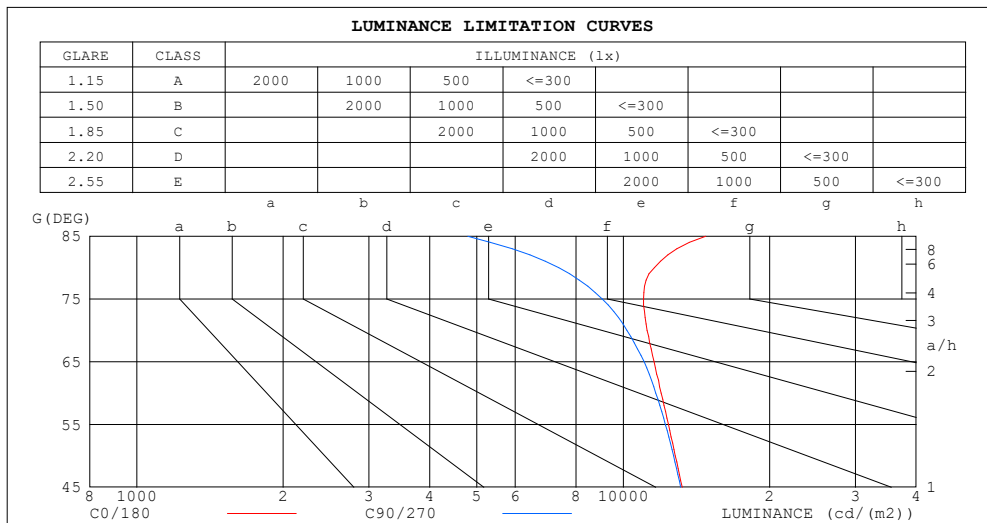

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	14773	4793
80	11594	7370
75	11002	9057
70	11190	10181
65	11566	11039
60	11970	11670
55	12385	12208
50	12796	12694
45	13218	13115


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-01-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:8.000m [K=0.7125]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz		
Lamp Flux:4855.16x1 lm		
Name: J-WL4FT	Type: LED	
MFR.:		

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.04	.99	.95	1.01	.97	.94	.97	.93	.90	.92	.90	.87	.89	.86	.85	.82
2.0	.90	.84	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.80	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.64	.60	.58
4.0	.71	.62	.55	.69	.61	.55	.66	.59	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.42	.56	.48	.41	.54	.47	.41	.52	.46	.41	.50	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.47	.38	.33	.45	.38	.33	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.42	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.38	.32	.27	.37	.31	.27	.36	.31	.26	.25

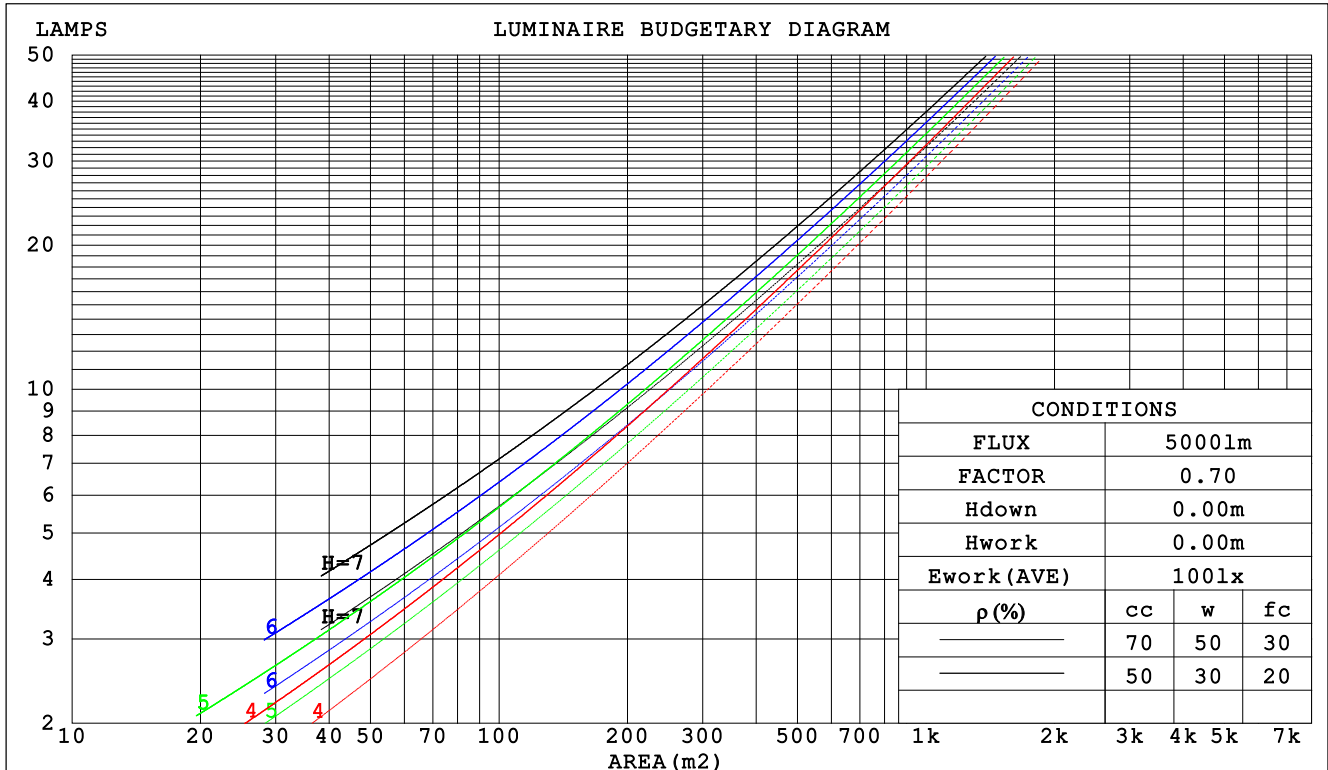

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-01-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:8.000m [K=0.7125]  
Remarks:

## WEC AND CCEC

Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz		
Lamp Flux:4855.16x1 lm		
Name: J-WL4FT	Type: LED	
MFR.:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.310	.176	.056	.303	.173	.055	.289	.166	.053	.276	.159	.051	.264	.153	.049		
2.0	.289	.158	.049	.283	.156	.048	.270	.150	.047	.259	.145	.045	.248	.140	.044		
3.0	.267	.142	.043	.261	.140	.042	.250	.135	.041	.240	.131	.040	.230	.127	.039		
4.0	.246	.128	.038	.241	.126	.037	.231	.122	.037	.222	.119	.036	.213	.116	.035		
5.0	.227	.116	.034	.223	.114	.033	.214	.111	.033	.206	.109	.032	.198	.106	.032		
6.0	.211	.106	.030	.207	.104	.030	.199	.102	.030	.192	.100	.029	.185	.097	.029		
7.0	.196	.097	.028	.193	.096	.027	.186	.094	.027	.179	.092	.027	.173	.090	.026		
8.0	.183	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.025	.162	.083	.024		
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022		
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022	
1.0	.191	.167	.145	.164	.143	.125	.112	.099	.086	.064	.057	.050	.021	.018	.016	
2.0	.183	.143	.109	.157	.123	.095	.107	.085	.066	.062	.050	.039	.020	.016	.013	
3.0	.175	.125	.086	.150	.108	.074	.103	.075	.052	.059	.044	.031	.019	.014	.010	
4.0	.167	.112	.070	.143	.097	.061	.099	.067	.043	.057	.040	.025	.018	.013	.008	
5.0	.160	.102	.059	.137	.088	.051	.094	.061	.036	.055	.036	.021	.018	.012	.007	
6.0	.152	.093	.051	.131	.081	.044	.090	.057	.031	.052	.033	.019	.017	.011	.006	
7.0	.146	.086	.045	.125	.075	.039	.087	.052	.028	.050	.031	.016	.016	.010	.005	
8.0	.139	.081	.040	.120	.070	.035	.083	.049	.025	.048	.029	.015	.016	.009	.005	
9.0	.133	.076	.037	.115	.066	.032	.080	.046	.023	.046	.027	.014	.015	.009	.004	
10.0	.128	.071	.034	.110	.062	.030	.076	.044	.021	.044	.026	.013	.014	.008	.004	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-01-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:8.000m [K=0.7125]  
Remarks:

### UGR(Unified Glare Rating) Table

Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz Lamp Flux:4855.16x1 lm										
Name: J-WL4FT					Type: LED					
MFR.:										
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.6	23.0	21.9	23.3	23.5	21.5	23.0	21.8	23.2	23.4
3H	23.1	24.5	23.4	24.7	25.0	22.9	24.3	23.2	24.5	24.8
4H	23.8	25.1	24.1	25.3	25.6	23.4	24.7	23.7	25.0	25.3
6H	24.3	25.6	24.7	25.9	26.2	23.7	25.0	24.1	25.3	25.6
8H	24.6	25.8	25.0	26.1	26.4	23.8	25.0	24.2	25.3	25.6
12H	24.9	26.0	25.3	26.3	26.7	23.8	25.0	24.2	25.3	25.6
4H 2H	22.2	23.5	22.5	23.7	24.0	22.1	23.4	22.4	23.7	24.0
3H	23.9	25.0	24.2	25.3	25.7	23.7	24.8	24.1	25.1	25.5
4H	24.7	25.7	25.1	26.1	26.4	24.3	25.4	24.7	25.7	26.1
6H	25.4	26.3	25.8	26.7	27.1	24.8	25.7	25.2	26.1	26.5
8H	25.8	26.6	26.2	27.0	27.4	24.9	25.8	25.3	26.2	26.6
12H	26.1	26.9	26.6	27.3	27.8	25.0	25.8	25.4	26.2	26.6
8H 4H	24.9	25.8	25.4	26.2	26.6	24.6	25.5	25.1	25.9	26.3
6H	25.9	26.6	26.3	27.0	27.5	25.2	26.0	25.7	26.4	26.8
8H	26.3	27.0	26.8	27.4	27.9	25.4	26.1	25.9	26.5	27.0
12H	26.8	27.4	27.3	27.9	28.4	25.6	26.1	26.1	26.6	27.1
12H 4H	24.9	25.7	25.4	26.2	26.6	24.7	25.5	25.1	25.9	26.3
6H	25.9	26.6	26.4	27.0	27.5	25.3	26.0	25.8	26.4	26.9
8H	26.5	27.0	27.0	27.5	28.0	25.6	26.1	26.1	26.6	27.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 4855 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 5.5$ )  
Area: 0.12 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-01-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:8.000m [K=0.7125]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz		
Lamp Flux:4855.16x1 lm		
Name: J-WL4FT	Type: LED	
MFR.:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	57	46	40	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	75	70	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	96	89	84	92	87	82	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	97	94	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-01-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:8.000m [K=0.7125]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz Lamp Flux:4855.16x1 lm		
Name: J-WL4FT	Type: LED	
MFR.:		

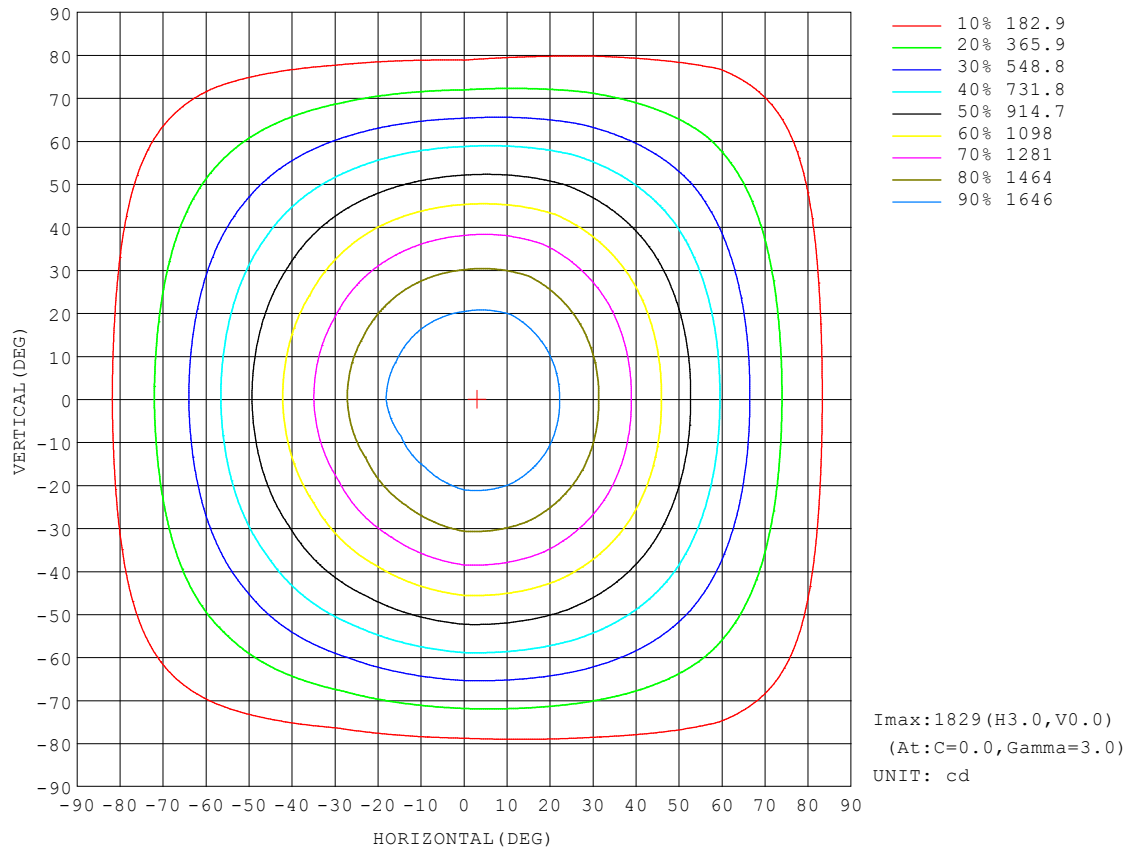


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-01-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:8.000m [K=0.7125]  
Remarks:



AAI Figure

Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz Lamp Flux:4855.16x1 lm		
Name: J-WL4FT	Type: LED	
MFR.:		

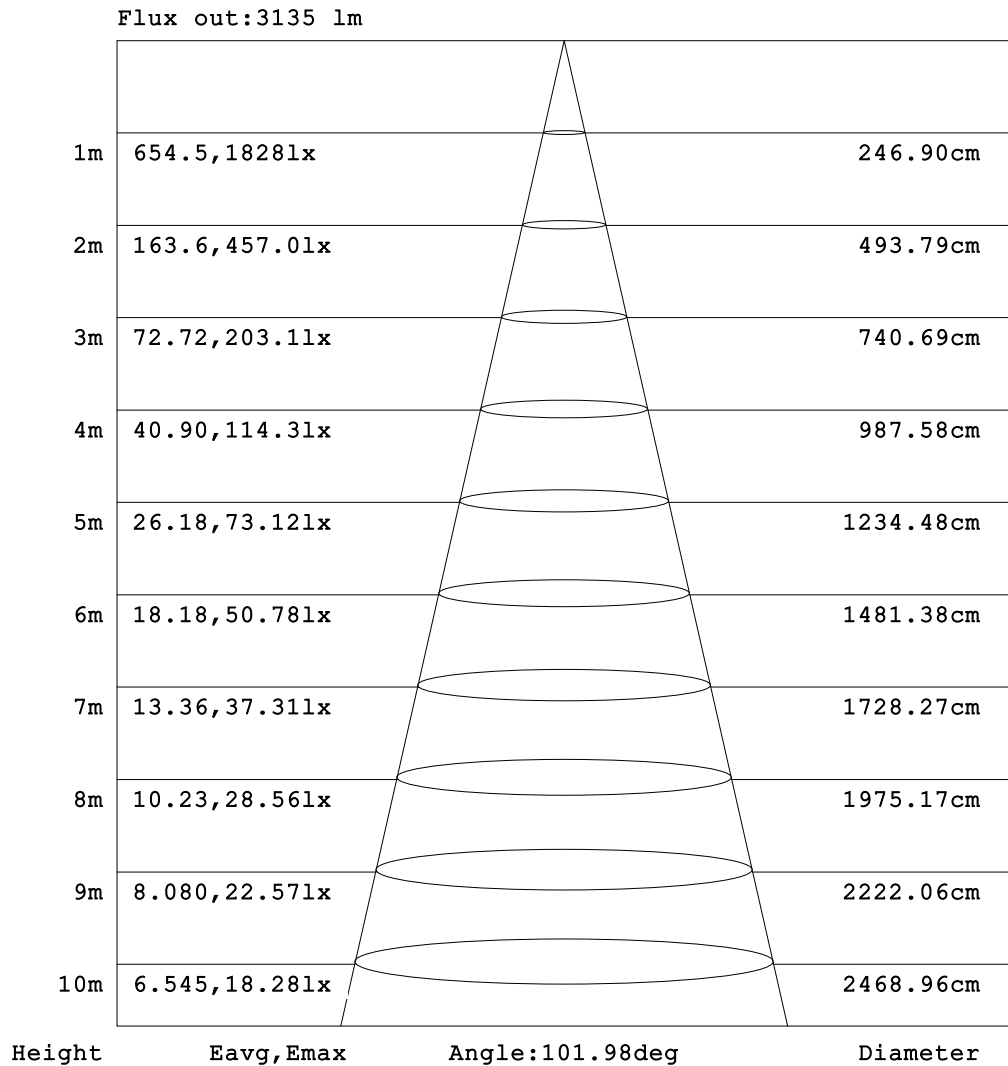


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: DAMIN  
Test Date: 2024-01-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity: 65.0%  
Test Distance: 8.000m [K=0.7125]  
Remarks:

### ISOLUX DIAGRAM


Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz Lamp Flux:4855.16x1 lm		
Name: J-WL4FT	Type: LED	
MFR.:		

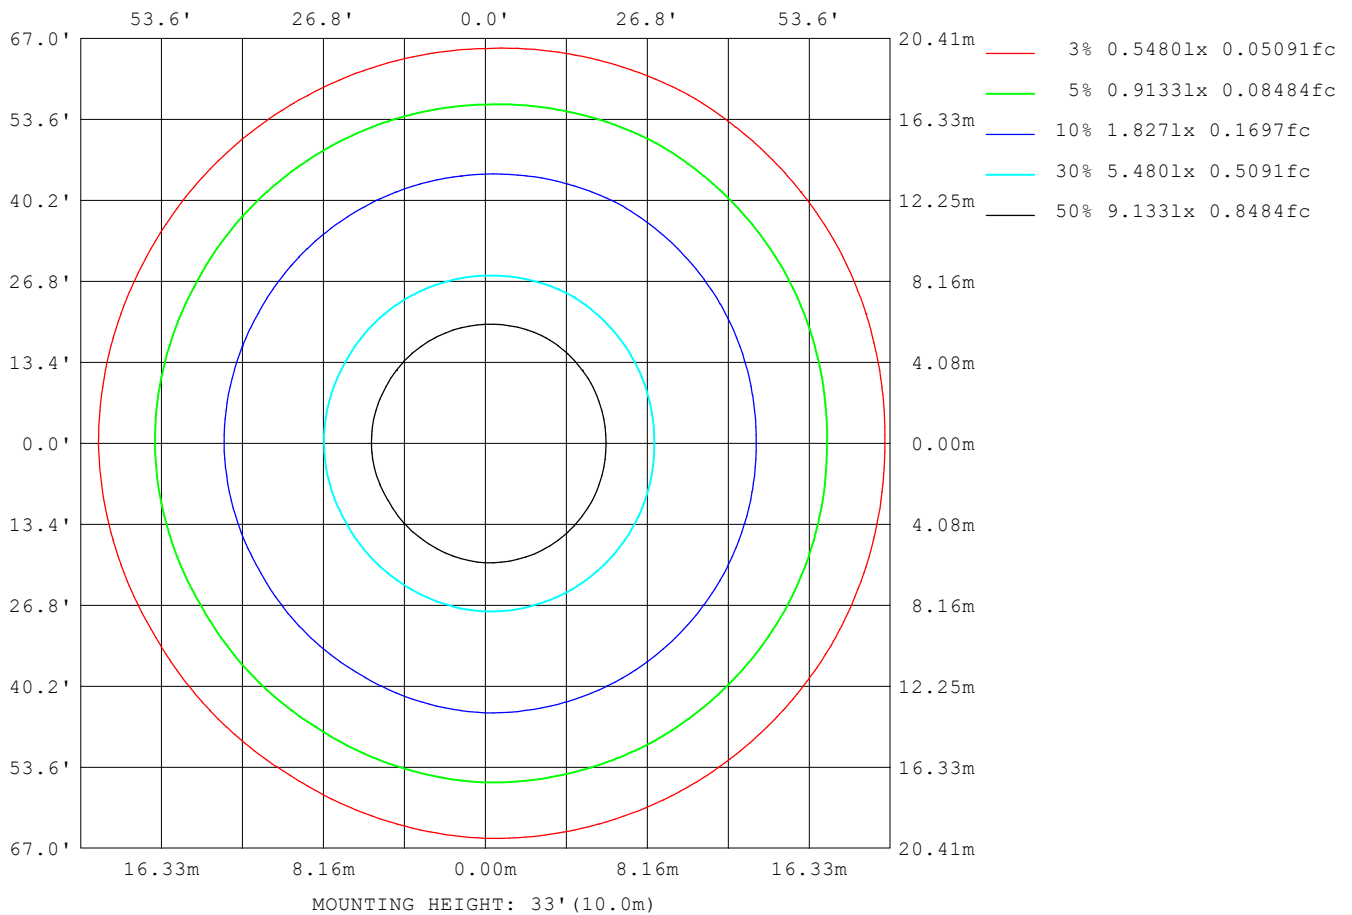

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-01-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:8.000m [K=0.7125]  
Remarks:

### Planar Illuminance Curve

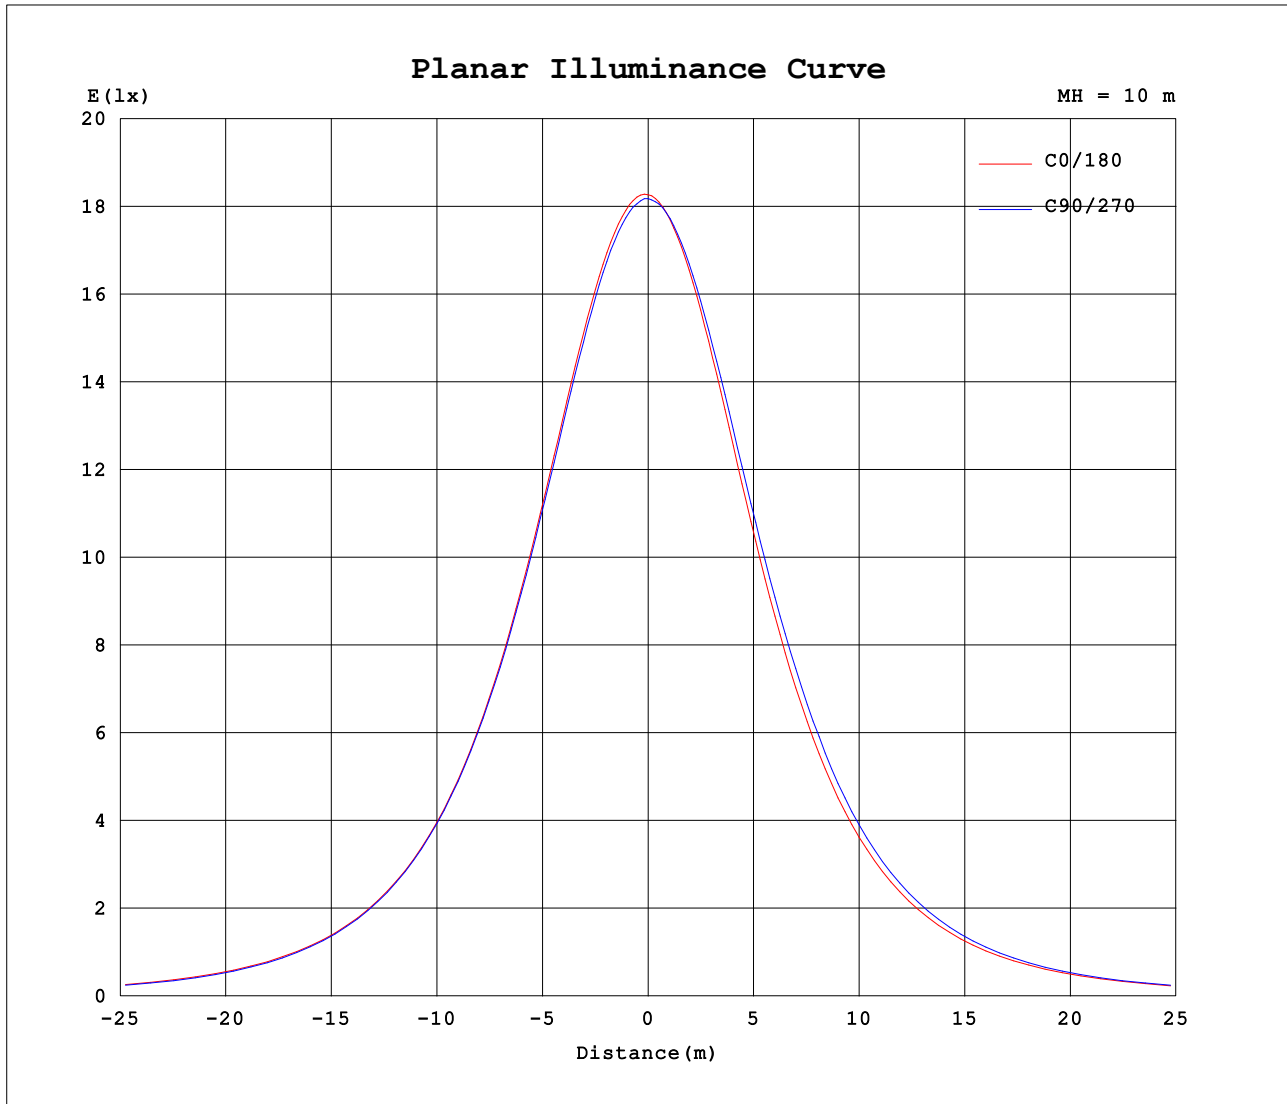

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: DAMIN  
 Test Date: 2024-01-08

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
 Humidity: 65.0%  
 Test Distance: 8.000m [K=0.7125]  
 Remarks:

### LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:121.4V I:0.3246A P:39.494W PF:0.9955 Freq:59.98Hz		
Lamp Flux:4855.16x1 lm		
Name: J-WL4FT	Type: LED	
MFR.:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1827	1825	1822	1818	1815	1811	1827	1825	1822	1818	1815	1811						
5	1825	1824	1819	1808	1795	1787	1806	1802	1804	1805	1813	1811						
10	1799	1800	1794	1780	1754	1743	1761	1759	1766	1774	1788	1789						
15	1752	1754	1749	1730	1696	1677	1696	1696	1708	1722	1746	1747						
20	1683	1689	1683	1663	1617	1594	1612	1611	1631	1653	1683	1683						
25	1597	1603	1601	1578	1524	1494	1512	1515	1540	1566	1602	1600						
30	1493	1503	1501	1478	1418	1383	1399	1404	1434	1466	1506	1502						
35	1377	1388	1389	1365	1300	1264	1279	1283	1320	1359	1399	1390						
40	1252	1264	1267	1243	1176	1138	1153	1158	1196	1233	1278	1268						
45	1122	1133	1136	1113	1046	1010	1025	1030	1068	1105	1151	1139						
50	987	1001	1001	979	914	881	896	902	935	971	1017	1006						
55	852	862	862	840	780	753	770	774	802	835	881	873						
60	718	727	722	700	645	626	646	647	669	697	742	739						
65	587	591	581	560	512	501	525	523	537	557	605	607						
70	459	458	442	418	380	383	410	404	405	418	465	479						
75	342	335	308	281	256	275	305	294	280	283	331	354						
80	242	226	185	154	146	181	213	197	168	155	208	243						
85	155	140	90.1	50.1	64.3	105	136	119	82.0	52.6	107	156						
90	88.7	73.6	30.8	3.32	19.1	51.8	76.7	61.6	29.8	8.39	43.7	85.4						
95	44.9	33.2	8.29	3.43	5.28	20.0	37.7	27.3	11.1	8.62	16.7	42.8						
100	20.1	13.1	4.64	3.81	3.88	7.35	17.3	12.8	8.76	8.93	10.1	21.1						
105	9.43	6.39	4.39	4.35	3.76	5.05	11.0	9.99	8.34	8.38	9.91	12.6						
110	6.66	5.49	4.47	5.02	3.98	4.43	9.86	9.20	8.36	8.51	9.83	11.6						
115	6.40	5.53	4.55	5.55	4.55	4.26	9.41	8.77	8.66	8.65	9.84	11.4						
120	6.15	5.58	4.57	5.76	5.19	4.49	8.93	8.84	9.19	8.86	9.91	10.9						
125	6.32	5.58	4.70	6.17	6.41	4.76	8.94	8.93	9.60	8.95	10.1	10.6						
130	6.56	5.79	4.88	6.38	6.98	5.39	8.96	9.10	10.5	9.17	10.2	10.6						
135	6.74	5.22	5.10	6.84	7.17	5.80	9.21	9.37	10.9	9.21	10.1	10.4						
140	6.87	5.23	5.85	7.11	7.57	7.09	9.29	9.64	11.2	9.23	10.5	10.4						
145	7.16	5.36	6.67	8.07	7.68	8.04	9.54	10.8	11.2	9.75	10.8	10.2						
150	7.45	5.60	7.06	8.21	9.18	8.02	9.93	11.1	10.8	9.86	12.4	9.85						
155	7.68	6.60	7.02	8.66	7.90	8.86	9.40	11.1	12.5	10.5	11.0	10.5						
160	9.01	8.80	7.35	9.64	8.09	8.73	9.29	10.8	10.3	11.3	10.4	10.8						
165	8.79	7.26	8.45	10.1	8.34	9.48	9.40	12.0	10.1	11.3	10.4	10.4						
170	8.16	7.50	9.37	10.4	8.63	8.44	8.12	9.48	9.89	11.4	10.1	9.78						
175	8.35	8.83	12.0	10.5	9.65	8.57	7.68	9.17	9.39	11.1	10.9	9.80						
180	8.46	10.1	10.5	10.8	11.1	10.4	8.47	10.3	10.5	10.9	11.1	10.5						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:DAMIN  
Test Date:2024-01-08

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.443  
Humidity:65.0%  
Test Distance:8.000m [K=0.7125]  
Remarks: