



# LED AREA LIGHT SERIES

ESL-AL-200320W-13050-BZYM-T3

Key Features & Benefits:

- Wattage and Kelvin Selectable
- Rotatable Optics
- NEMA Receptacle and Shorting Cap
- Rugged Anodized Aluminum Housing
- Multiple Stocked Finish Options (White, Bronze, Black, Grey)
- Tool-less Entry to Easily Access Fixture Components
- Innovative Mounting Hardware Allows for Single Person Installation

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_

Product Specifications:

Selectable Wattage: 200W–240W–280W–320W  
Selectable Kelvin: 3000K–4000K–5000K  
Max Lumen Output: 49,280 Lumens  
Max Efficacy: 171 lm/W  
Voltage: 120–277 VAC  
Input Frequency: 50/60 Hz  
Surge Protection: 10kV  
Power Factor: >0.92  
THD: 80  
Lens Type: T3  
Cord Length: 6”  
Dimensions: L19.61” x W13.23” x H2.83”  
Weight (lbs): 12.35  
Finish: BZ (Bronze)  
L70 Lifetime Calculated per TM21: 120,000 hours  
Warranty: 10 Year



Ordering Guide:

| ESL | TYPE            | SELECTABLE WATTAGE                                          | GEN         | SELECTABLE KELVIN        | VOLTAGE                                 | FINISH                                               | MOUNT                                                                                                                   |                                            |
|-----|-----------------|-------------------------------------------------------------|-------------|--------------------------|-----------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| ESL | AL              | 200320W                                                     | 1           | 3050                     |                                         | BZ                                                   | YM                                                                                                                      |                                            |
|     | (AL) Area Light | (75150W) 75W–90W–120W–150W<br>(200320W) 200W–240W–280W–320W | (1) 1st Gen | (3050) 3000K–4000K–5000K | (BLANK) 120–277 VAC<br>(HV) 200–528 VAC | (BZ) Bronze<br>(WH) White<br>(BK) Black<br>(GR) Grey | (NM) No Mount<br>(AM) All Mounts¹<br>- ¹available for Bronze<br>(BZ) only<br>(SF) Slip Fitter<br>(UDM) Universal Direct | (T2)<br>(T3)¹<br>- ¹Defect<br>(T4)<br>(T5) |

**FACTORY INSTALLED OPTIONS**

|      |                                |
|------|--------------------------------|
| PC   | On/Off photocell (120–277 VAC) |
| PCHV | On/Off photocell (347–538 VAC) |

**FIELD INSTALLED ACCESSORIES**

|                  |                                                                                                                                                     |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| ESL-AL3-XXSF     | Slip Fitter Mount / XX=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black*                                                                              |
| ESL-AL3-XXUDM    | Universal Direct Mount; Knuckle Mount with Flat, 4" Round and 5" Round Adapters / XX=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black*                |
| ESL-AL3-XXYM     | Yoke Mount / XX=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black*                                                                                     |
| ESL-AL3-XXFUDM   | Fixed Universal Direct Mount; Non-Articulating Mount with Flat, 4" Round and 5" Round Adapters / XX=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black* |
| ESL-OCCP-LV-01   | Stand Alone PIR Occupancy Sensor, 12–24 VDC, Uses REM-100 for Programming, Wet Rated, White Finish, Field Installable                               |
| ESL-BBG2001-5    | Bird Spike, 2 Foot Section, 5" Width                                                                                                                |
| ESL-AL3-HSS-S-XX | House Side Shield for 75150W / XX=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black                                                                    |
| ESL-AL3-HSS-L-XX | House Side Shield for 200320W / XX=(BZ) Bronze, (WH) White, (GR) Grey, (BK) Black                                                                   |

**What's in the Box:**


**(AM) All Mounts**  
Universal Direct Mount  
Slip Fitter Mount  
Yoke Mount  
Shorting Cap



**(NM) No Mount**  
Shorting Cap



**(UDM)**  
Universal Direct Mount  
Shorting Cap



**(SF)**  
Slip Fitter  
Shorting Cap



**(YM)**  
Yoke Mount  
Shorting Cap



**(FUDM)**  
Fixed Universal  
Direct Mount  
Shorting Cap

**Finishes:**


**(BZ) Bronze**  
R36301



**(WH) White**  
RAL9016



**(BK) Black**  
B2639



**(GR) Grey**  
RAL9006

**Lumen Ambient Temperature (LAT) Multipliers:**

| AMBIENT |        | LUMEN MULTIPLIER |
|---------|--------|------------------|
| 0 °C    | 32 °F  | 1.02             |
| 10 °C   | 50 °F  | 1.01             |
| 20 °C   | 68 °F  | 1.00             |
| 25 °C   | 77 °F  | 1.00             |
| 30 °C   | 86 °F  | 1.00             |
| 40 °C   | 104 °F | 0.99             |
| 50 °C   | 122 °F | 0.96             |

### Catalog Data:

| ITEM#                                                           | SELECTABLE<br>WATTAGE | SELECTABLE KELVIN |     |        |     |        |     | FINISH<br>(ff)                                       | MOUNT*<br>(mm)                                                                                                                                                                                                       | LENS<br>(II)                                                               | DLC QPL<br>(BY LENS) <sup>1</sup>                                            |
|-----------------------------------------------------------------|-----------------------|-------------------|-----|--------|-----|--------|-----|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|------------------------------------------------------------------------------|
|                                                                 |                       | 3000K*            |     | 4000K* |     | 5000K* |     |                                                      |                                                                                                                                                                                                                      |                                                                            |                                                                              |
| ESL-AL-75150W-13050-XXXX-II<br>ESL-AL-75150W-HV-13050-XXXX-II   | 75W                   | 11,625            | 155 | 12,825 | 171 | 12,225 | 163 | (BZ) Bronze<br>(WH) White<br>(BK) Black<br>(GR) Grey | (NM) No Mount<br>(AM) All Mounts <sup>1</sup><br><br><sup>1</sup> available for Bronze (BZ) only<br>(SF) Slip Fitter<br>(UDM) Universal<br>Direct Mount<br>(YM) Yoke Mount<br>(FUDM) Fixed Universal<br>Direct Mount | (T2)<br>(T3) <sup>1</sup><br>(T4)<br>(T5)<br><br><sup>1</sup> Default Lens | (T2)<br>S-WJC69M<br>(T3)<br>S-1QD5OE<br>(T4)<br>S-T2ML43<br>(T5)<br>S-YOKLIR |
|                                                                 | 90W                   | 13,500            | 150 | 14,850 | 165 | 14,220 | 158 |                                                      |                                                                                                                                                                                                                      |                                                                            |                                                                              |
|                                                                 | 120W                  | 17,400            | 145 | 19,200 | 160 | 18,240 | 152 |                                                      |                                                                                                                                                                                                                      |                                                                            |                                                                              |
|                                                                 | 150W                  | 21,000            | 140 | 23,100 | 154 | 22,050 | 147 |                                                      |                                                                                                                                                                                                                      |                                                                            |                                                                              |
|                                                                 |                       |                   |     |        |     |        |     |                                                      |                                                                                                                                                                                                                      |                                                                            |                                                                              |
| ESL-AL-200320W-13050-XXXX-II<br>ESL-AL-200320W-HV-13050-XXXX-II | 200W                  | 31,000            | 155 | 34,200 | 171 | 32,600 | 163 | (BZ) Bronze<br>(WH) White<br>(BK) Black<br>(GR) Grey | (NM) No Mount<br>(AM) All Mounts <sup>1</sup><br><br><sup>1</sup> available for Bronze (BZ) only<br>(SF) Slip Fitter<br>(UDM) Universal<br>Direct Mount<br>(YM) Yoke Mount<br>(FUDM) Fixed Universal<br>Direct Mount | (T2)<br>(T3) <sup>1</sup><br>(T4)<br>(T5)<br><br><sup>1</sup> Default Lens | (T2)<br>S-IG70Z8<br>(T3)<br>S-FPBD62<br>(T4)<br>S-9UX4BM<br>(T5)<br>S-CMWDON |
|                                                                 | 240W                  | 36,000            | 150 | 39,600 | 165 | 37,920 | 158 |                                                      |                                                                                                                                                                                                                      |                                                                            |                                                                              |
|                                                                 | 280W                  | 40,600            | 145 | 44,800 | 160 | 42,560 | 152 |                                                      |                                                                                                                                                                                                                      |                                                                            |                                                                              |
|                                                                 | 320W                  | 44,800            | 140 | 49,280 | 154 | 47,040 | 147 |                                                      |                                                                                                                                                                                                                      |                                                                            |                                                                              |
|                                                                 |                       |                   |     |        |     |        |     |                                                      |                                                                                                                                                                                                                      |                                                                            |                                                                              |

\* Only fixtures using the Fixed Universal Direct Mount (FUDM) and a setting of 3000K are DarkSky approved.










### Electrical Load — Standard Voltage:

| SYSTEM WATTS | INPUT CURRENT |         |         |         | INPUT WATTAGE | INPUT FREQUENCY | POWER FACTOR                     | THD  | OPERATING TEMPERATURE             | SURGE PROTECTION                         | DIMMING |
|--------------|---------------|---------|---------|---------|---------------|-----------------|----------------------------------|------|-----------------------------------|------------------------------------------|---------|
|              | 120 VAC       | 208 VAC | 240 VAC | 277 VAC |               |                 |                                  |      |                                   |                                          |         |
| 75           | 0.63          | 0.36    | 0.31    | 0.27    | 120–277 VAC   | 50/60 Hz        | >0.97 @120 VAC<br>>0.92 @277 VAC | <13% | -40°F to 122°F<br>(-40°C to 50°C) | 4kV L/N<br>6kV L/N/G<br>10kV–Serviceable | 0–10V   |
| 90           | 0.75          | 0.43    | 0.38    | 0.32    |               |                 |                                  |      |                                   |                                          |         |
| 120          | 1.00          | 0.58    | 0.50    | 0.43    |               |                 |                                  |      |                                   |                                          |         |
| 150          | 1.25          | 0.72    | 0.63    | 0.54    |               |                 |                                  |      |                                   |                                          |         |
| 200          | 1.67          | 0.96    | 0.83    | 0.72    |               |                 |                                  |      |                                   |                                          |         |
| 240          | 2.00          | 1.15    | 1.00    | 0.87    |               |                 |                                  |      |                                   |                                          |         |
| 280          | 2.33          | 1.35    | 1.17    | 1.01    |               |                 |                                  |      |                                   |                                          |         |
| 320          | 2.67          | 1.54    | 1.33    | 1.16    |               |                 |                                  |      |                                   |                                          |         |

### Electrical Load — High Voltage:

| SYSTEM WATTS | INPUT CURRENT |         |         | INPUT WATTAGE | INPUT FREQUENCY | POWER FACTOR                     | THD  | OPERATING TEMPERATURE             | SURGE PROTECTION                         | DIMMING |
|--------------|---------------|---------|---------|---------------|-----------------|----------------------------------|------|-----------------------------------|------------------------------------------|---------|
|              | 277 VAC       | 347 VAC | 480 VAC |               |                 |                                  |      |                                   |                                          |         |
| 75           | 0.27          | 0.22    | 0.16    | 200–528 VAC   | 50/60 Hz        | >0.95 @277 VAC<br>>0.90 @480 VAC | <13% | -40°F to 122°F<br>(-40°C to 50°C) | 4kV L/N<br>6kV L/N/G<br>10kV–Serviceable | 0–10V   |
| 90           | 0.32          | 0.26    | 0.19    |               |                 |                                  |      |                                   |                                          |         |
| 120          | 0.43          | 0.35    | 0.25    |               |                 |                                  |      |                                   |                                          |         |
| 150          | 0.54          | 0.43    | 0.31    |               |                 |                                  |      |                                   |                                          |         |
| 200          | 0.72          | 0.58    | 0.42    |               |                 |                                  |      |                                   |                                          |         |
| 240          | 0.87          | 0.69    | 0.50    |               |                 |                                  |      |                                   |                                          |         |
| 280          | 1.01          | 0.81    | 0.58    |               |                 |                                  |      |                                   |                                          |         |
| 320          | 1.16          | 1.01    | 0.73    |               |                 |                                  |      |                                   |                                          |         |

## Optics Distribution Options:

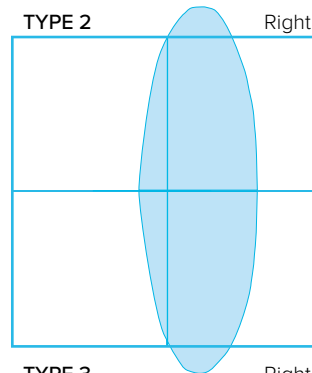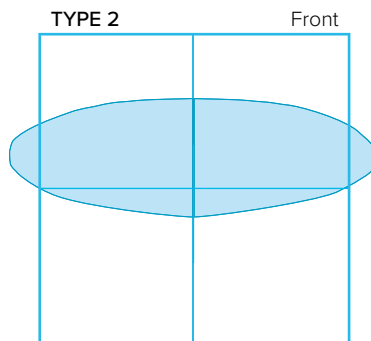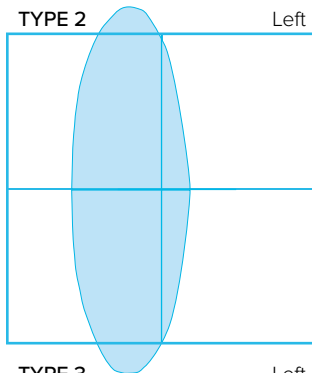


## FREE LIGHTING LAYOUT DESIGN



ESL Vision's lighting design engineers can help create custom lighting layouts for you — FREE OF CHARGE!

## TYPE 5



## EPA Ratings:

| TILT                      | SINGLE FIXTURE                                                                      | TWO FIXTURES @ 90°                                                                  | TWO FIXTURES @ 180°                                                                 | THREE FIXTURES @ 90°                                                                 | THREE FIXTURES AT 120°                                                                | FOUR FIXTURES @ 90°                                                                   |
|---------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                           |  |  |  |  |  |  |
| 75W / 90W / 120W / 150W   |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
| 0°                        | 0.15                                                                                | 0.30                                                                                | 0.34                                                                                | 0.46                                                                                 | 0.43                                                                                  | 0.67                                                                                  |
| 10°                       | 0.18                                                                                | 0.38                                                                                | 0.43                                                                                | 0.77                                                                                 | 0.66                                                                                  | 1.45                                                                                  |
| 30°                       | 0.57                                                                                | 1.23                                                                                | 1.44                                                                                | 1.84                                                                                 | 1.75                                                                                  | 2.55                                                                                  |
| 60°                       | 1.04                                                                                | 1.97                                                                                | 2.13                                                                                | 2.65                                                                                 | 2.47                                                                                  | 4.34                                                                                  |
| 90°                       | 1.21                                                                                | 2.24                                                                                | 2.35                                                                                | 3.49                                                                                 | 3.38                                                                                  | 4.86                                                                                  |
| 200W / 240W / 280W / 320W |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
| 0°                        | 0.19                                                                                | 0.48                                                                                | 0.52                                                                                | 1.47                                                                                 | 1.32                                                                                  | 1.74                                                                                  |
| 10°                       | 0.97                                                                                | 0.87                                                                                | 1.34                                                                                | 2.36                                                                                 | 2.16                                                                                  | 2.36                                                                                  |
| 30°                       | 1.00                                                                                | 1.92                                                                                | 2.23                                                                                | 3.43                                                                                 | 3.25                                                                                  | 5.67                                                                                  |
| 60°                       | 1.61                                                                                | 3.41                                                                                | 3.86                                                                                | 5.72                                                                                 | 5.53                                                                                  | 7.74                                                                                  |
| 90°                       | 1.80                                                                                | 3.75                                                                                | 4.13                                                                                | 6.58                                                                                 | 6.53                                                                                  | 10.38                                                                                 |







# LED AREA LIGHT SERIES



ESL-AL-200320W-13050-BZYM-T3

Dimensions:

75150W

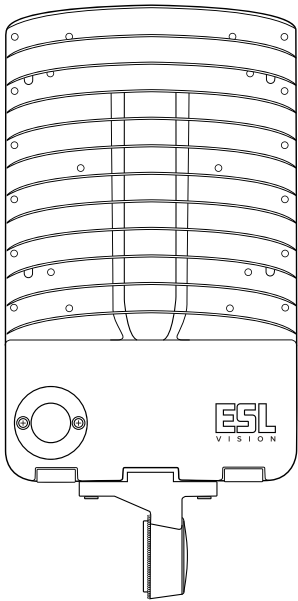


200320W


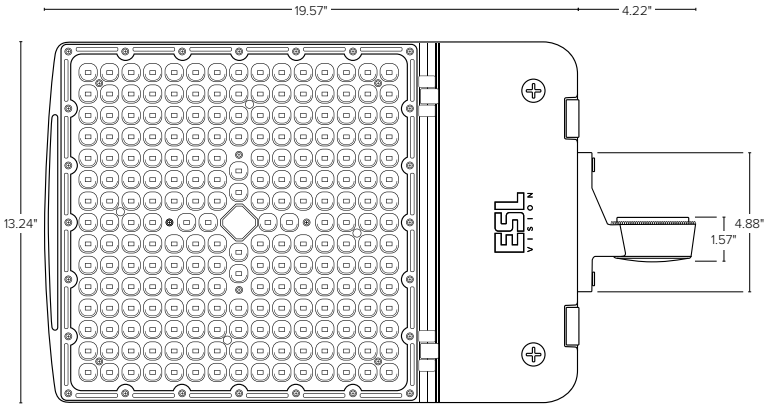


### Mount Dimensions:




## UNIVERSAL DIRECT MOUNT

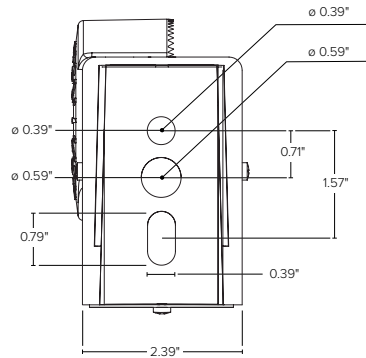

BACK  
(Drilling Info)

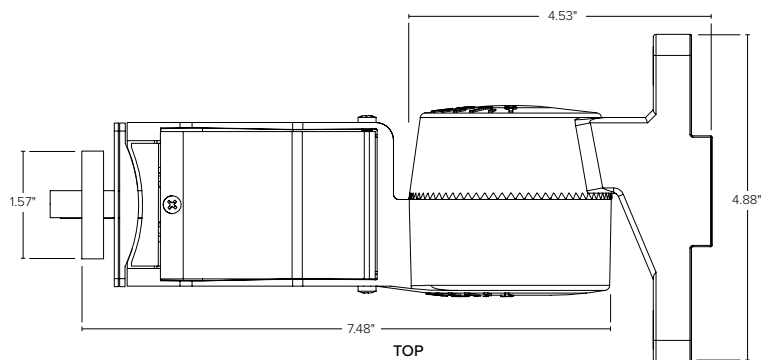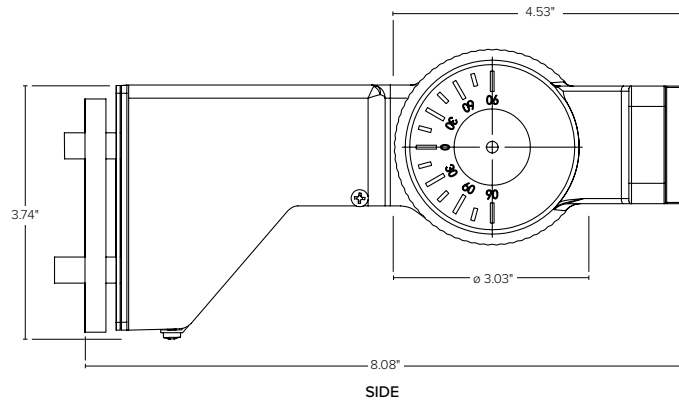


## SLIP FITTER

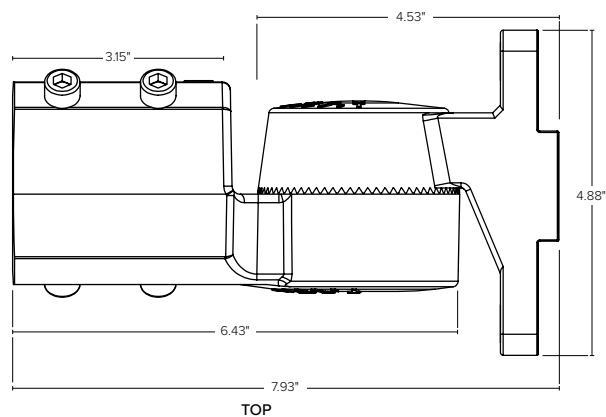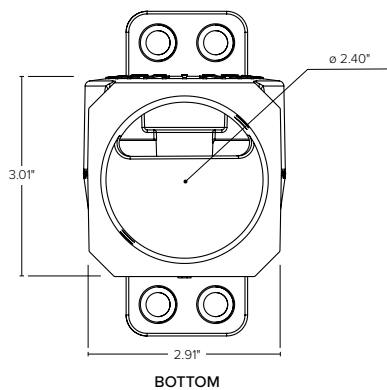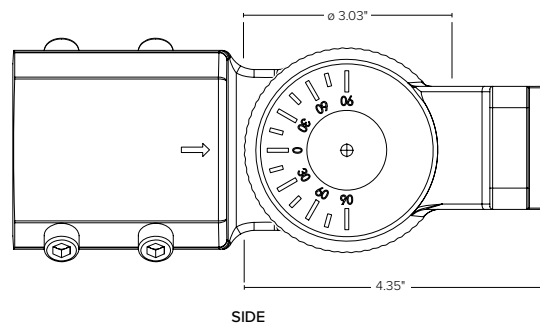


Mount Dimensions:

YOKE MOUNT

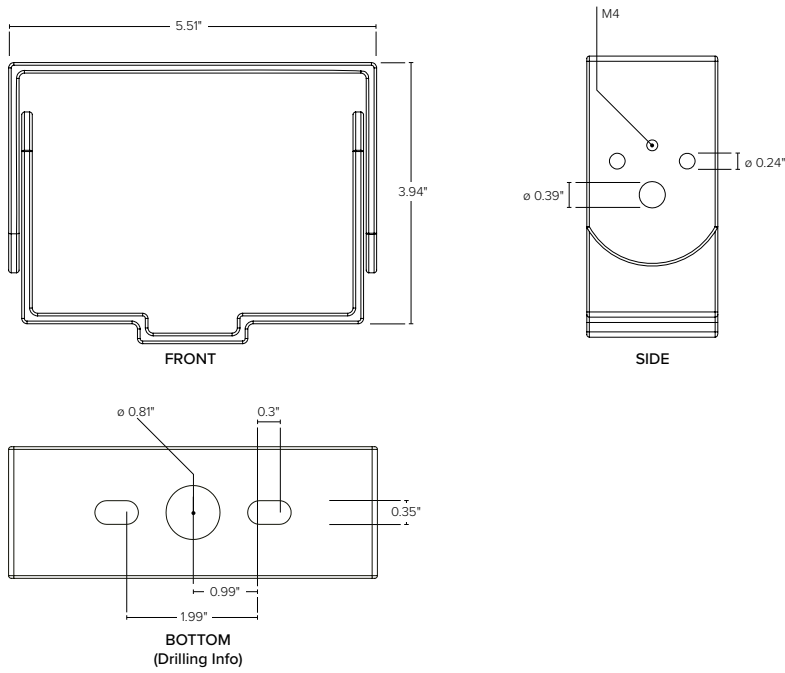

FIXED UNIVERSAL DIRECT MOUNT

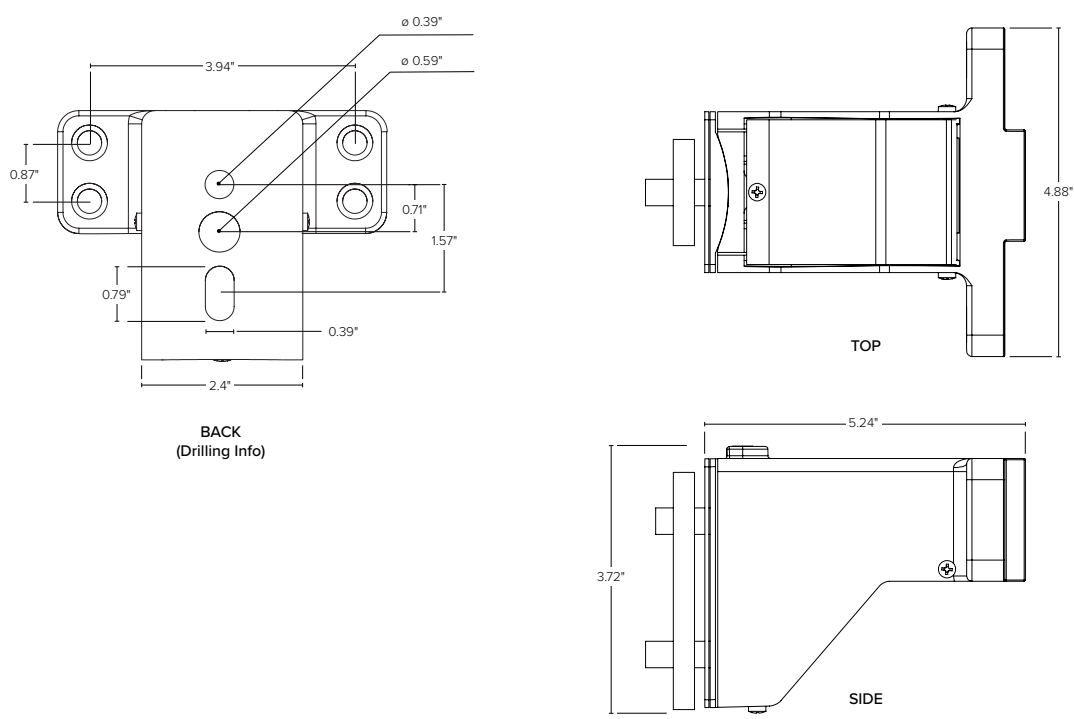

House Side Shield Dimensions:

SMALL HOUSE SIDE SHIELD



LARGE HOUSE SIDE SHIELD



### Ordering Short Codes for 75150W Fixtures:

| Part #                           | Short Code | Wattage | Voltage  | No Mount | Slip Fitter | Universal Direct Mount | Yoke Mount | Fixed Universal Direct Mount | Optics | Finish |
|----------------------------------|------------|---------|----------|----------|-------------|------------------------|------------|------------------------------|--------|--------|
| ESL-AL-75150W-13050-BZNM-T3      | AL101      | 150W    | 120–277V | x        |             |                        |            |                              | T3     | Bronze |
| ESL-AL-75150W-13050-BZAM-T3      | AL102      | 150W    | 120–277V |          | x           | x                      | x          |                              | T3     | Bronze |
| ESL-AL-75150W-13050-BZSF-T3      | AL103      | 150W    | 120–277V |          | x           |                        |            |                              | T3     | Bronze |
| ESL-AL-75150W-13050-BZUDM-T3     | AL104      | 150W    | 120–277V |          |             | x                      |            |                              | T3     | Bronze |
| ESL-AL-75150W-13050-BZYM-T3      | AL105      | 150W    | 120–277V |          |             |                        | x          |                              | T3     | Bronze |
| ESL-AL-75150W-13050-BZFUDM-T3    | AL106      | 150W    | 120–277V |          |             |                        |            | x                            | T3     | Bronze |
| ESL-AL-75150W-13050-HV-BZNM-T3   | AL113      | 150W    | 200–528V | x        |             |                        |            |                              | T3     | Bronze |
| ESL-AL-75150W-13050-HV-BZAM-T3   | AL114      | 150W    | 200–528V |          | x           | x                      | x          |                              | T3     | Bronze |
| ESL-AL-75150W-13050-HV-BZSF-T3   | AL115      | 150W    | 200–528V |          | x           |                        |            |                              | T3     | Bronze |
| ESL-AL-75150W-13050-HV-BZUDM-T3  | AL116      | 150W    | 200–528V |          |             | x                      |            |                              | T3     | Bronze |
| ESL-AL-75150W-13050-HV-BZYM-T3   | AL117      | 150W    | 200–528V |          |             |                        | x          |                              | T3     | Bronze |
| ESL-AL-75150W-13050-HV-BZFUDM-T3 | AL118      | 150W    | 200–528V |          |             |                        |            | x                            | T3     | Bronze |
| ESL-AL-75150W-13050-WHSF-T3      | AL150      | 150W    | 120–277V |          | x           |                        |            |                              | T3     | White  |
| ESL-AL-75150W-13050-WHUDM-T3     | AL152      | 150W    | 120–277V |          |             | x                      |            |                              | T3     | White  |
| ESL-AL-75150W-13050-WHYM-T3      | AL151      | 150W    | 120–277V |          |             |                        | x          |                              | T3     | White  |
| ESL-AL-75150W-13050-WHFUDM-T3    | AL153      | 150W    | 120–277V |          |             |                        |            | x                            | T3     | White  |
| ESL-AL-75150W-13050-HV-WHSF-T3   | AL154      | 150W    | 200–528V |          | x           |                        |            |                              | T3     | White  |
| ESL-AL-75150W-13050-HV-WHUDM-T3  | AL156      | 150W    | 200–528V |          |             | x                      |            |                              | T3     | White  |
| ESL-AL-75150W-13050-HV-WHYM-T3   | AL155      | 150W    | 200–528V |          |             |                        | x          |                              | T3     | White  |
| ESL-AL-75150W-13050-HV-WHFUDM-T3 | AL157      | 150W    | 200–528V |          |             |                        |            | x                            | T3     | White  |
| ESL-AL-75150W-13050-GRSF-T3      | AL166      | 150W    | 120–277V |          | x           |                        |            |                              | T3     | Grey   |
| ESL-AL-75150W-13050-GRUDM-T3     | AL197      | 150W    | 120–277V |          |             | x                      |            |                              | T3     | Grey   |
| ESL-AL-75150W-13050-GRYM-T3      | AL167      | 150W    | 120–277V |          |             |                        | x          |                              | T3     | Grey   |
| ESL-AL-75150W-13050-GRFUDM-T3    | AL168      | 150W    | 120–277V |          |             |                        |            | x                            | T3     | Grey   |
| ESL-AL-75150W-13050-HV-GRSF-T3   | AL169      | 150W    | 200–528V |          | x           |                        |            |                              | T3     | Grey   |
| ESL-AL-75150W-13050-HV-GRUDM-T3  | AL171      | 150W    | 200–528V |          |             | x                      |            |                              | T3     | Grey   |
| ESL-AL-75150W-13050-HV-GRYM-T3   | AL170      | 150W    | 200–528V |          |             |                        | x          |                              | T3     | Grey   |
| ESL-AL-75150W-13050-HV-GRFUDM-T3 | AL172      | 150W    | 200–528V |          |             |                        |            | x                            | T3     | Grey   |
| ESL-AL-75150W-13050-BKSF-T3      | AL181      | 150W    | 120–277V |          | x           |                        |            |                              | T3     | Black  |
| ESL-AL-75150W-13050-BKUDM-T3     | AL183      | 150W    | 120–277V |          |             | x                      |            |                              | T3     | Black  |
| ESL-AL-75150W-13050-BKYM-T3      | AL182      | 150W    | 200–528V |          |             |                        | x          |                              | T3     | Black  |
| ESL-AL-75150W-13050-BKFUDM-T3    | AL184      | 150W    | 120–277V |          |             |                        |            | x                            | T3     | Black  |
| ESL-AL-75150W-13050-HV-BKSF-T3   | AL185      | 150W    | 200–528V |          | x           |                        |            |                              | T3     | Black  |
| ESL-AL-75150W-13050-HV-BKUDM-T3  | AL187      | 150W    | 200–528V |          |             | x                      |            |                              | T3     | Black  |
| ESL-AL-75150W-13050-HV-BKYM-T3   | AL186      | 150W    | 200–528V |          |             |                        | x          |                              | T3     | Black  |
| ESL-AL-75150W-13050-HV-BKFUDM-T3 | AL188      | 150W    | 200–528V |          |             |                        |            | x                            | T3     | Black  |

### Ordering Short Codes for 200320W Fixtures:

| Part #                            | Short Code | Wattage | Voltage  | No Mount | Slip Fitter | Universal Direct Mount | Yoke Mount | Fixed Universal Direct Mount | Optics | Finish |
|-----------------------------------|------------|---------|----------|----------|-------------|------------------------|------------|------------------------------|--------|--------|
| ESL-AL-200320W-13050-BZNM-T3      | AL126      | 320W    | 120–277V | x        |             |                        |            |                              | T3     | Bronze |
| ESL-AL-200320W-13050-BZAM-T3      | AL127      | 320W    | 120–277V |          | x           | x                      | x          |                              | T3     | Bronze |
| ESL-AL-200320W-13050-BZSF-T3      | AL128      | 320W    | 120–277V |          | x           |                        |            |                              | T3     | Bronze |
| ESL-AL-200320W-13050-BZUDM-T3     | AL129      | 320W    | 120–277V |          |             | x                      |            |                              | T3     | Bronze |
| ESL-AL-200320W-13050-BZYM-T3      | AL130      | 320W    | 120–277V |          |             |                        | x          |                              | T3     | Bronze |
| ESL-AL-200320W-13050-BZFUDM-T3    | AL131      | 320W    | 120–277V |          |             |                        |            | x                            | T3     | Bronze |
| ESL-AL-200320W-13050-HV-BZNM-T3   | AL138      | 320W    | 200–528V | x        |             |                        |            |                              | T3     | Bronze |
| ESL-AL-200320W-13050-HV-BZAM-T3   | AL139      | 320W    | 200–528V |          | x           | x                      | x          |                              | T3     | Bronze |
| ESL-AL-200320W-13050-HV-BZSF-T3   | AL140      | 320W    | 200–528V |          | x           |                        |            |                              | T3     | Bronze |
| ESL-AL-200320W-13050-HV-BZUDM-T3  | AL141      | 320W    | 200–528V |          |             | x                      |            |                              | T3     | Bronze |
| ESL-AL-200320W-13050-HV-BZYM-T3   | AL142      | 320W    | 200–528V |          |             |                        | x          |                              | T3     | Bronze |
| ESL-AL-200320W-13050-HV-BZFUDM-T3 | AL143      | 320W    | 200–528V |          |             |                        |            | x                            | T3     | Bronze |
| ESL-AL-200320W-13050-WHSF-T3      | AL158      | 320W    | 120–277V |          | x           |                        |            |                              | T3     | White  |
| ESL-AL-200320W-13050-WHUDM-T3     | AL160      | 320W    | 120–277V |          |             | x                      |            |                              | T3     | White  |
| ESL-AL-200320W-13050-WHYM-T3      | AL159      | 320W    | 120–277V |          |             |                        | x          |                              | T3     | White  |
| ESL-AL-200320W-13050-WHFUDM-T3    | AL161      | 320W    | 120–277V |          |             |                        |            | x                            | T3     | White  |
| ESL-AL-200320W-13050-HV-WHSF-T3   | AL162      | 320W    | 200–528V |          | x           |                        |            |                              | T3     | White  |
| ESL-AL-200320W-13050-HV-WHUDM-T3  | AL164      | 320W    | 200–528V |          |             | x                      |            |                              | T3     | White  |
| ESL-AL-200320W-13050-HV-WHYM-T3   | AL163      | 320W    | 200–528V |          |             |                        | x          |                              | T3     | White  |
| ESL-AL-200320W-13050-HV-WHFUDM-T3 | AL165      | 320W    | 200–528V |          |             |                        |            | x                            | T3     | White  |
| ESL-AL-200320W-13050-GRSF-T3      | AL173      | 320W    | 120–277V |          | x           |                        |            |                              | T3     | Grey   |
| ESL-AL-200320W-13050-GRUDM-T3     | AL175      | 320W    | 120–277V |          |             | x                      |            |                              | T3     | Grey   |
| ESL-AL-200320W-13050-GRYM-T3      | AL174      | 320W    | 120–277V |          |             |                        | x          |                              | T3     | Grey   |
| ESL-AL-200320W-13050-GRFUDM-T3    | AL176      | 320W    | 120–277V |          |             |                        |            | x                            | T3     | Grey   |
| ESL-AL-200320W-13050-HV-GRSF-T3   | AL177      | 320W    | 200–528V |          | x           |                        |            |                              | T3     | Grey   |
| ESL-AL-200320W-13050-HV-GRUDM-T3  | AL179      | 320W    | 200–528V |          |             | x                      |            |                              | T3     | Grey   |
| ESL-AL-200320W-13050-HV-GRYM-T3   | AL178      | 320W    | 200–528V |          |             |                        | x          |                              | T3     | Grey   |
| ESL-AL-200320W-13050-HV-GRFUDM-T3 | AL180      | 320W    | 200–528V |          |             |                        |            | x                            | T3     | Grey   |
| ESL-AL-200320W-13050-BKSF-T3      | AL189      | 320W    | 120–277V |          | x           |                        |            |                              | T3     | Black  |
| ESL-AL-200320W-13050-BKUDM-T3     | AL191      | 320W    | 120–277V |          |             | x                      |            |                              | T3     | Black  |
| ESL-AL-200320W-13050-BKYM-T3      | AL190      | 320W    | 120–277V |          |             |                        | x          |                              | T3     | Black  |
| ESL-AL-200320W-13050-BKFUDM-T3    | AL192      | 320W    | 120–277V |          |             |                        |            | x                            | T3     | Black  |
| ESL-AL-200320W-13050-HV-BKSF-T3   | AL193      | 320W    | 200–528V |          | x           |                        |            |                              | T3     | Black  |
| ESL-AL-200320W-13050-HV-BKUDM-T3  | AL195      | 320W    | 200–528V |          |             | x                      |            |                              | T3     | Black  |
| ESL-AL-200320W-13050-HV-BKYM-T3   | AL194      | 320W    | 200–528V |          |             |                        | x          |                              | T3     | Black  |
| ESL-AL-200320W-13050-HV-BKFUDM-T3 | AL196      | 320W    | 200–528V |          |             |                        |            | x                            | T3     | Black  |