



### ⚠ WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.

### Junction Box Mounting




**1** Loosen the two (2) set screws found on the bottom of the fixture housing.




**2** Next, remove the quick mount bracket and attach it to the junction box.




**3** Connect the wires according to the diagrams below. Push any excess wire into the junction box.




**4** Lift the fixture and tilt toward the quick mount bracket. Hook the fixture housing onto the bracket as shown.



**5** Tighten the two (2) set screws to secure the fixture housing to the quick mount bracket.



**6** Restore the power and check that the fixture is functioning properly.

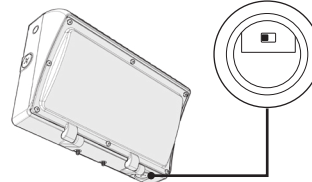


**7** To adjust wattage: With the power off, open the bottom plug. Adjust to the desired wattage by sliding the switch.

### Standard Wiring Diagram

#### SUPPLY


L  
N  
G  
0-10VDC  
DIM+  
DIM- (if applicable)

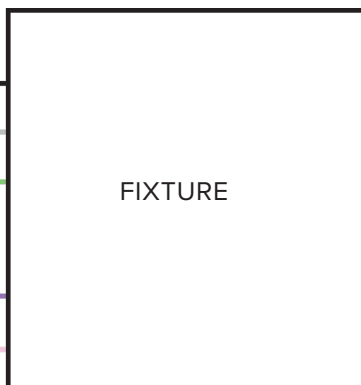

### EMG Wiring Diagram

#### SUPPLY

L (unswitched)  
L (switched)  
N  
G  
0-10VDC  
DIM+  
DIM- (if applicable)

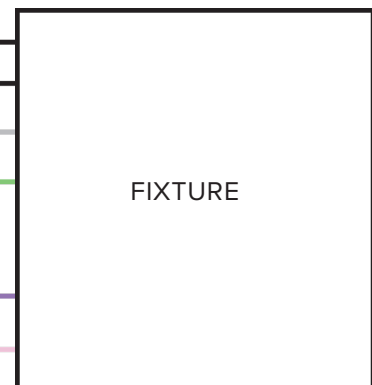

TEST SWITCH

