

Key Features & Benefits:

- Slim Profile
- PIR Motion Sensor
- Time Delay Settings (1, 5, & 10 Minute Selections)
- Field Selectable Kelvin (2700K, 3000K, 3500K, 4000K, 5000K)
- Compatible with 3/0 & 4/0 J-Boxes
- Slotted Keyholes for Easy Installation

Project: _____

Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Wattage: 15W
 Selectable Kelvin: 2700K–3000K–3500K–4000K–5000K
 Max Lumen Output: 1,100 Lumens
 Max Efficacy: 73 lm/W
 Voltage: 120 VAC
 Input Frequency: 50/60 HZ
 Operating Temperature: -4°F to 122°F (-20°C to 50°C)
 Dimming: Non Dimmable
 CRI: >90
 Beam Angle: 120°
 Dimensions: L7.36" x W7.36" x H1.26"
 Weight (lbs): 1.04
 Finish: WH (White)
 L70 Lifetime Calculated per TM21: 50,000 hours
 Warranty: 5 Year




Ordering Guide:

ESL	TYPE	SIZE	WATTS	GEN	SELECTABLE KELVIN
ESL	ODSK	6	15W	1	2750
(ODSK) Occupancy Disk (6) 6 inch (15W) 15 Watts (1) 1st Gen (2750) 2700K–3000K–3500K–4000K–5000K					


Catalog Data:

ITEM#	WATTAGE	KELVIN	LUMENS	EFFICACY lm/W	INPUT VOLTAGE	SELECTABLE TIME DELAY	DIMENSIONS (LxWxH)
ESL-ODSK-6-15W-230-DA	15W	3000K	1,100	73	120 VAC	1 MINUTE	7.32" x 7.32" x 1.34"
ESL-ODSK-6-15W-240-DA	15W	4000K	1,150	76	120 VAC	5 MINUTES	
						10 MINUTES	

Dimensions:

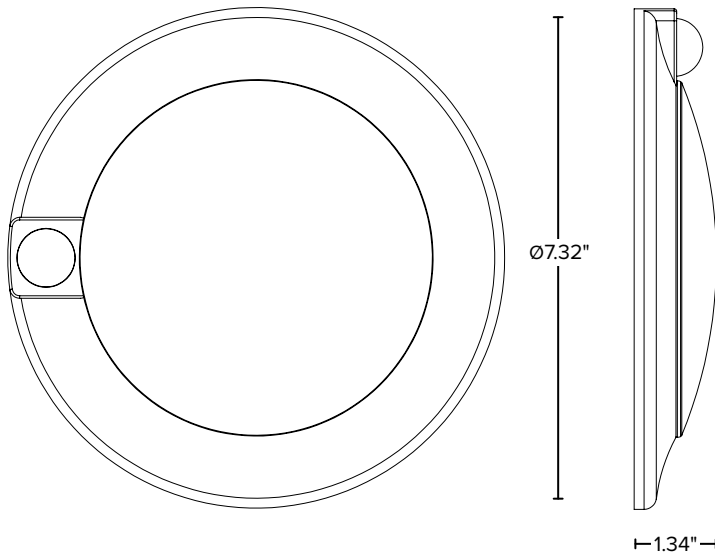


Installation:

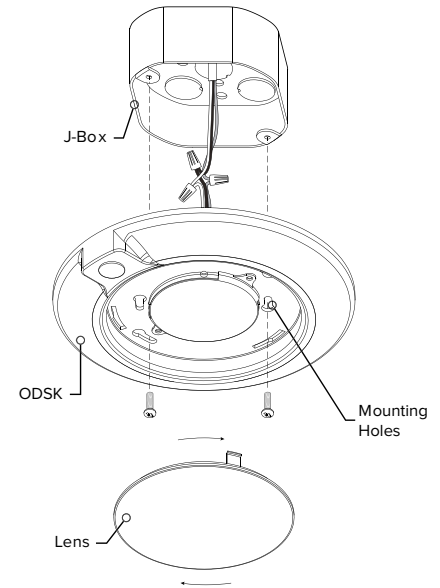


Sensor Detection Range:

Ceiling Mount

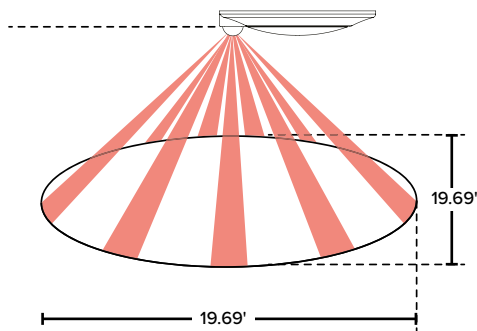

Wall Mount



Selectable Time Delay Switch:

Back of Fixture

