



FLOOD LIGHT SERIES

ESL-FLD-5090W-13050-WH

Key Features & Benefits:

- Wattage Selectable
- Kelvin Selectable
- Comes Standard with Multiple Mounting Options in the box
- Integrated Photocell That Can be Turned On or Off as Needed
- Optional Factory Fixed Wattage
- Bronze or White Finishes
- Durable Die-Cast Housing

Project: _____

Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Selectable Wattage: 50W–70W–90W
Selectable Kelvin: 3000K–4000K–5000K
Max Lumen Output: 10,967 Lumens
Max Efficacy: 127 lm/W
Voltage: 120–277 VAC
Input Frequency: 50/60 Hz
Power Factor: >0.9
THD: -
Operating Temperature: -40°F to 104°F (-40°C to 40°C)
Dimming: 0–10V
Dimming Range: 0-100%
Dim to Off: true
CRI: >80
Beam Angle: 40°
Cord Length: 6”
Dimensions: L10.51” x W3.27” x H6.89”
Weight (lbs): 6.88
Finish: WH (White)
L70 Lifetime Calculated per TM21: 145,000 hours
Warranty: 5 Year



Ordering Guide:

ESL	TYPE	SELECTABLE WATTAGE	GEN	SELECTABLE KELVIN	FINISH
ESL	FLD	5090W	1	3050	WH
(FLD) Flood Light (1535W) 15W–25W–35W (5090W) 50W–70W–90W (105150W) 105W–120W–150W (1) 1st Gen (3050) 3000K–4000K–5000K (BZ) Bronze (WH) White					

FIELD INSTALLED ACCESSORIES

ESL-FL1-S-WG	Wire Guard for 1535W Flood Light
ESL-FL1-M-WG	Wire Guard for 5090W Flood Light
ESL-FL1-L-WG	Wire Guard for 90150W Flood Light
ESL-FL1-S-VSH	Vandal Shield for 1535W Flood Light
ESL-FL1-M-VSH	Vandal Shield for 5090W Flood Light
ESL-FL1-L-VSH	Vandal Shield for 105150W Flood Light
ESL-ACCS-PC-003	Photocell for FLD Flood Light


Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	LUMENS	EFFICACY (lm/W)	FINISH (ff)	MOUNTING	DIMENSIONS	DLC QPL CODE
ESL-FLD-1535W-13050-ff	15W	3000K	2,064	138	(BZ) Bronze (WH) White	Universal 1/2" Knuckle & Yoke	7.0" x 3.0" x 5.0"	S-HS5G97
		4000K	2,224	148				
		5000K	2,186	146				
	25W	3000K	3,258	130				
		4000K	3,480	139				
		5000K	3,379	135				
	35W	3000K	4,503	129				
		4000K	4,796	137				
		5000K	4,772	136				
ESL-FLD-5090W-13050-ff	50W	3000K	6,909	138	(BZ) Bronze (WH) White	Universal 1/2" Knuckle & Yoke	10.5" x 3.25" x 7.0"	S-6A5JX3
		4000K	7,415	148				
		5000K	7,337	147				
	70W	3000K	9,085	130				
		4000K	9,777	140				
		5000K	9,679	138				
	90W	3000K	10,967	122				
		4000K	11,896	132				
		5000K	11,473	127				
ESL-FLD-105150W-13050-ff	105W	3000K	14,099	134	(BZ) Bronze (WH) White	Slip Fitter & Yoke	14.0" x 3.25" x 9.0"	S-EGJSRO
		4000K	15,148	144				
		5000K	14,837	141				
	120W	3000K	15,591	130				
		4000K	16,590	138				
		5000K	16,027	134				
	150W	3000K	19,557	130				
		4000K	20,793	139				
		5000K	20,154	134				


Dimensions:

1535W

Knuckle Mount

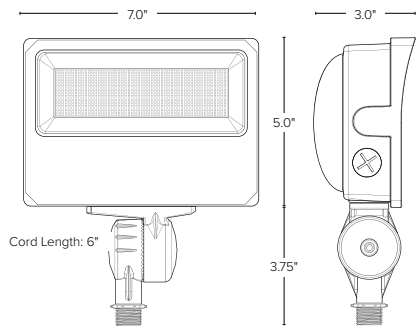


Yoke Mount

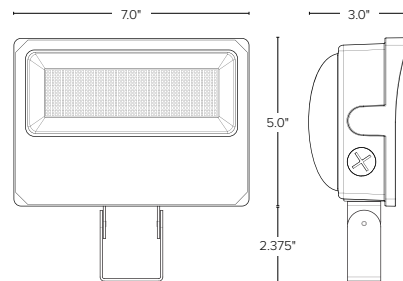


5090W

Knuckle Mount

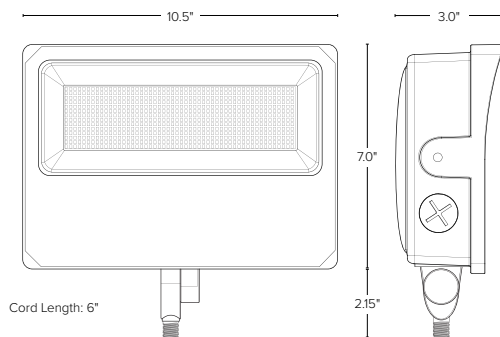


Yoke Mount

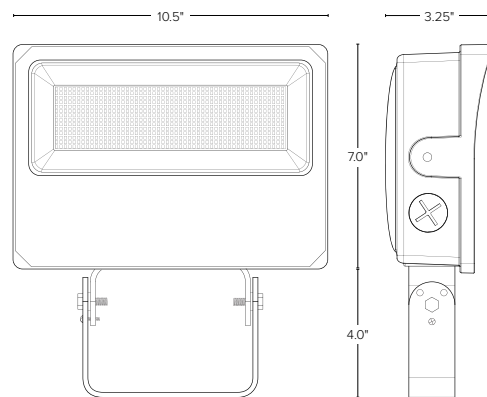

105150W

Slip Fitter

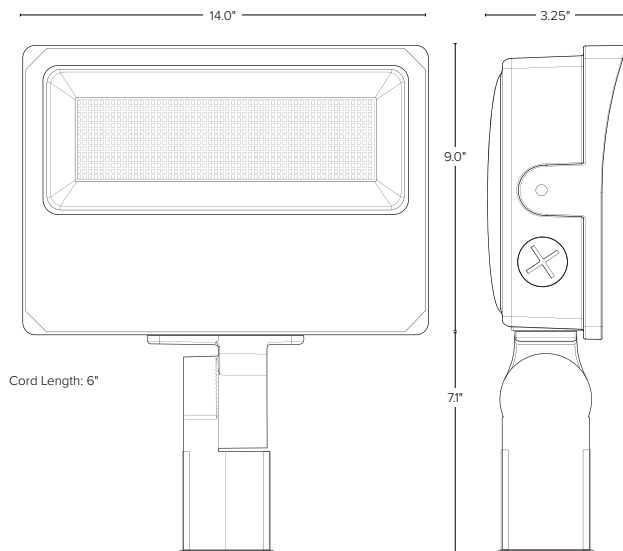

Yoke Mount

