



WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, turn off power and DO NOT attempt repair unless you are a qualified technician.

Full Cutoff Wall Pack 3rd Generation

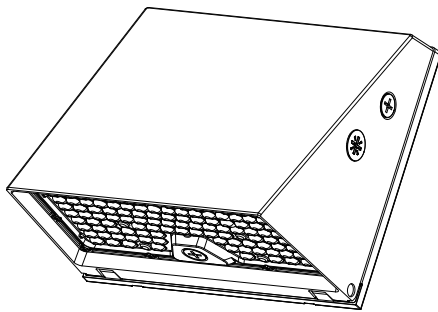


ESL-FCWP-2060W-33050

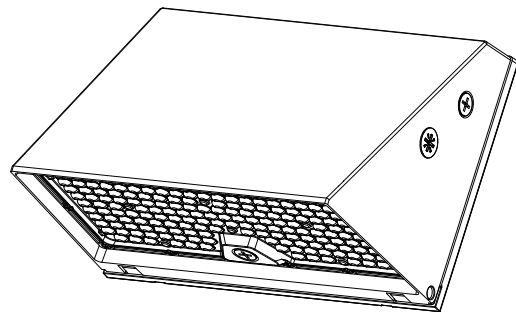


ESL-FCWP-80120W-33050


Surface Mount




- 1** Confirm the main power is off.

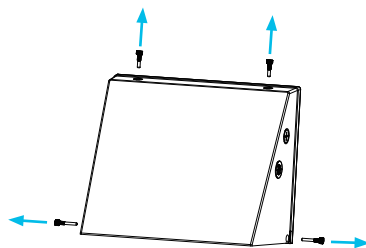


- 2** Loosen and remove the hinge and set screws.

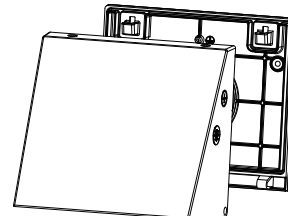


- 3** Open the fixture and separate the light from the base plate.

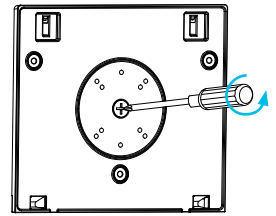


- 4** Remove the plug and attach an EVA cotton pad.

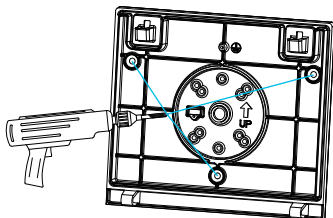


- 5** Drill through the outer mounting holes with an electric drill.

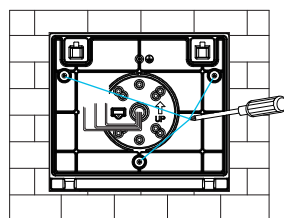

- 6** Attach the base plate of the fixture to the surface with proper connectors.

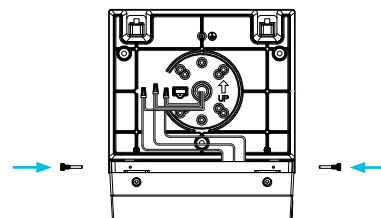


- 7** Fasten the hinge screws and attach the light, then connect the wires as shown in the wiring diagram.

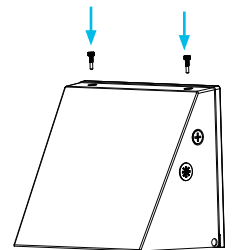


- 8** Mount the light and fasten the set screws. Use silicon to seal the fixture to it's mounting surface. Restore the main power.


J-Box Installation




1 Confirm the main power is off.

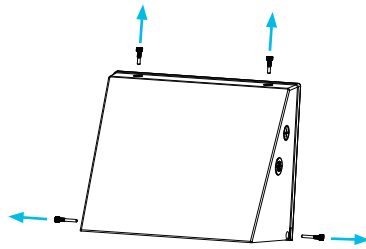


2 Loosen and remove the hinge and set screws.

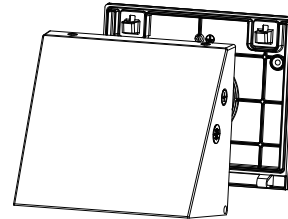


3 Open the fixture and separate the light from the base plate.

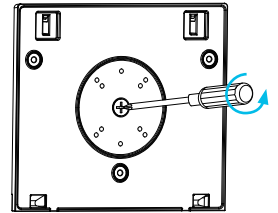


4 Remove the plug and attach an EVA cotton pad.

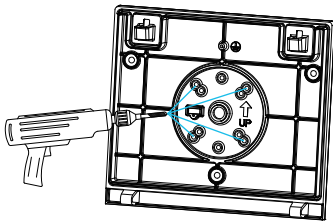


5 Drill through the mounting holes that match your J-Box with an electric drill.

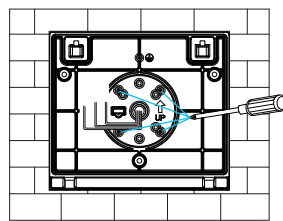

6 Attach the base plate of the fixture to the J-Box with proper connectors.

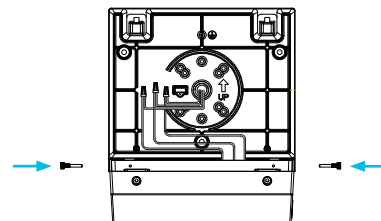


7 Fasten the hinge screws and attach the light, then connect the wires as shown in the wiring diagram.




8 Mount the light and fasten the set screws. Use silicon to seal the fixture to its mounting surface. Restore the main power.

Photocell

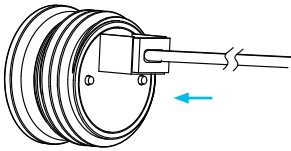


1 To enable the photocell, open the port and plug in the connector.

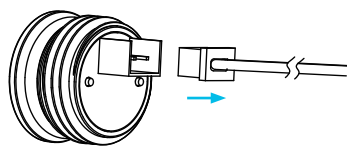

2 To disable the photocell, open the port and unplug the connector.

CCT and Wattage Adjustment

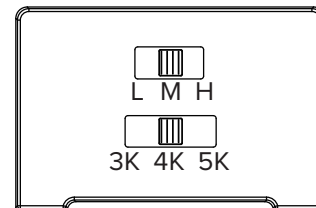

1 First, turn off the power. To adjust the color temperature, move the switch to the desired setting.

2 First, turn off the power. To adjust the wattage, move the switch to the desired setting.

Wiring Diagram

