



# INTELLISENSE™ BACKLIT PANELS

ESL-ISS-620-22-2040W-3550K

Key Features & Benefits:

- IntelliSense™ Sensor Enabled
- Wattage and Kelvin Selectable
- Slim Design for Multiple Applications
- 1–10V Dimming
- Back Lit for Uniform Lighting

Project: \_\_\_\_\_


Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_

Product Specifications:

Selectable Kelvin: 3500K–4000K–5000K  
Max Efficacy: 125 lm/W  
Voltage: 120–277 VAC  
Input Frequency: 50/60 Hz  
Power Factor: >0.9  
THD: 80  
Dimensions: L23.74” x W23.74” x H1.42”  
Weight (lbs): 4.25  
Finish: WH (White)  
L70 Lifetime Calculated per TM21: L70 > 100,000 hrs  
Warranty: 5 Year

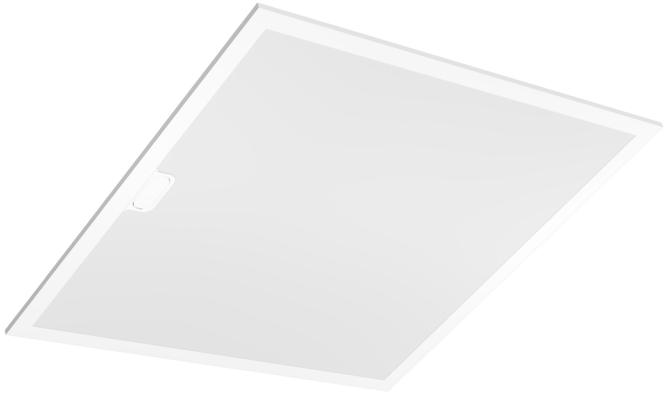

Ordering Guide:

ESL	TYPE	SIZE	SELECTABLE WATTAGE	KELVIN	SELECTABLE KELVIN
ESL	ISS-620	22	2040W	3550K	3550
	(ISS-620) IntelliSense™ Series Backlit Panel	(22) 2x2 (14) 1x4 (24) 2x4	(2040W) 20W–30W–40W (3050W) 30W–40W–50W		(3550K) 3500K–4000K–5000K

