

Key Features & Benefits:

- Kelvin and Wattage Selectable
- Low Profile Design
- 0–10V Continuous Dimming

Project: _____

Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Selectable Kelvin: 3500K–4000K–5000K
 Max Lumen Output: 5,520 Lumens
 Max Efficacy: 115 lm/W
 Voltage: 120–277 VAC
 Input Frequency: 50/60 Hz
 Operating Temperature: -4°F to 122°F (-20°C to 50°C)
 Dimming: 0–10V
 Dimming Range: 0%-100%
 Dim to Off: true
 CRI: >80
 Beam Angle: 110°
 Dimensions: L48.58" x W5.71" x H2.48"
 Weight (lbs): 4.41
 Finish: WH (White)
 L70 Lifetime Calculated per TM21: 100,000 hours
 Warranty: 5 Year



Ordering Guide:

ESL	TYPE	SIZE	SELECTABLE KELVIN
ESL	CSS-810	4	3550

(CSS-810) Contractor Series Selectable Wrap

(4) 4Foot

(3550K) 3500K–4000K–5000K


Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE	DLC QPL CODE
ESL-CSS-810-4-3248W-3550K	32W—40W—48W	3500K—4000K—5000K	5,520	115	120–277 VAC	S-1V17WH

Electrical Load — Standard Voltage:

SYSTEM WATTS	INPUT CURRENT				INPUT WATTAGE	INPUT FREQUENCY	POWER FACTOR	THD	OPERATING TEMPERATURE	DIMMING
	120 VAC	208 VAC	240 VAC	277 VAC						
32	0.27	0.15	0.13	0.12	120–277 VAC	50/60 Hz	>0.9	<20%	-4°F to 122°F (-20°C to 50°C)	0–10V Dimming
40	0.33	0.19	0.17	0.14	120–277 VAC	50/60 Hz	>0.9	<20%	-4°F to 122°F (-20°C to 50°C)	0–10V Dimming
48	0.40	0.23	0.20	0.17	120–277 VAC	50/60 Hz	>0.9	<20%	-4°F to 122°F (-20°C to 50°C)	0–10V Dimming

Dimensions:

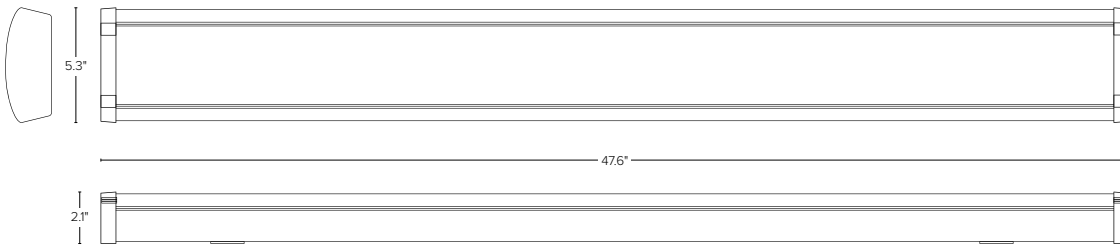

Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT		LUMEN MULTIPLIER
0 °C	32 °F	1.02
10 °C	50 °F	1.01
20 °C	68 °F	1.00
25 °C	77 °F	1.00
30 °C	86 °F	1.00
40 °C	104 °F	0.99
50 °C	122 °F	0.96