

Key Features & Benefits:

- Ultra-Thin Profile
- IC Rated
- Selectable Kelvin
- Simple, Quick Connect Installation to Provided J-Box
- Wet Location Rated
- Energy Star Listed

Project: _____


Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Wattage: 6W
 Selectable Kelvin: 2700K–3000K–3500K–4000K–5000K
 Max Lumen Output: 442 Lumens
 Max Efficacy: 74 lm/W
 Voltage: 120 VAC
 Input Frequency: 50/60 HZ
 Operating Temperature: -4°F to 122°F (-20°C to 50°C)
 Dimming: Triac 120 VAC
 Dimming Range: 10-100%
 CRI: >90
 Beam Angle: 120°
 Dimensions: L318" x W218" x 3.62" x H0.83"
 Weight (lbs): 0.55
 Finish: WH (White)
 L70 Lifetime Calculated per TM21: 50,000 hours
 Warranty: 5 Year

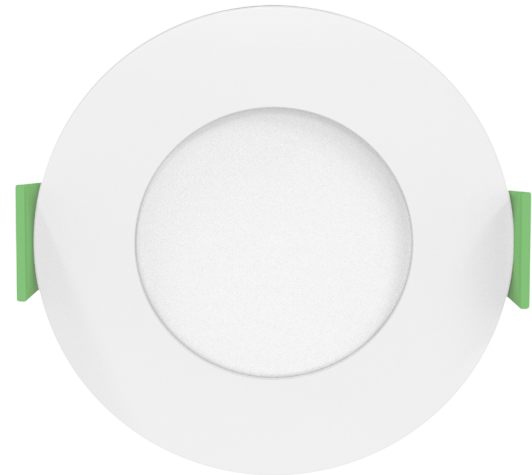

Ordering Guide:

ESL	TYPE	SIZE	WATTS	GEN	SELECTABLE KELVIN	FINISH
ESL	WFR	3	6W	3	2750	WH
	(WFR) Wafer Series	(R3) Round 3 inch (R4) Round 4 inch (R6) Round 6 inch	(6W) 6 Watts - 3" (9W) 9 Watts - 4" (12W) 12 Watts - 6"	(3) 3rd Gen	(2750) 2700K–3000K–3500K–4000K–5000K	(WH) White

FIELD INSTALLED ACCESSORIES

ESL-WFR3-3-Tff	3-inch Wafer field installable trim kit ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP)
ESL-WFR3-4-Tff	4-inch Wafer field installable trim kit ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP)
ESL-WFR3-6-Tff	6-inch Wafer field installable trim kit ff = Trim Color: Black (BK), Bronze (BZ), Brushed Nickel (BN), Copper (CP)
ESL-WFR3-EXT-10FT	10 foot extension cord
ESL-WFR3-EXT-20FT	20 foot extension cord
ESL-RDL-4-RKIT-001	4", new construction pre-mounting plate
ESL-RDL-6-RKIT-001	6", new construction pre-mounting plate

Catalog Data:

ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	DIMENSIONS
3" ESL-WFR-R3-6W-32750-WH	6W	2700K—3000K—3500K— 4000K—5000K	442	74	120 VAC	Ø3.62" x 0.84"
4" ESL-WFR-R4-9W-32750-WH	9W	2700K—3000K—3500K— 4000K—5000K	637	71	120 VAC	Ø4.92" x 0.90"
6" ESL-WFR-R6-12W-32750-WH	12W	2700K—3000K—3500K— 4000K—5000K	1,026	86	120 VAC	Ø6.88" x 0.92"

Maximum Lumen Output based off of Selectable Kelvin:

ITEM#	WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT
3" ESL-WFR-R3-6W-32750-WH	6W	2700K	375
		3000K	379
		3500K	414
		4000K	442
		5000K	383
4" ESL-WFR-R4-9W-32750-WH	9W	2700K	561
		3000K	594
		3500K	624
		4000K	637
		5000K	612
6" ESL-WFR-R6-12W-32750-WH	12W	2700K	913
		3000K	957
		3500K	1010
		4000K	1026
		5000K	1022

Compatible Dimmers

LUTRON	
TG-600PR-WH	GT-600P
S-600PR-WH	DVCL-153P
CTCL-153PDH-WH	PD-6WCL
TGCL-153PH-LA	MACL-153M//MA-R
SLV-600P-AL	RNL06
DV-600PR-	MSCL-OP153M
SCL-153PH-WH	IPL06

LEVITON
6672
6674
DSL06
PD-6WCL
MACL-153M//MA-R

Dimensions:

