



FULL CUTOFF WALL PACK SERIES

ESL-FCWP-65110W-23050-BZ

Key Features & Benefits:

- Kelvin and Wattage Selectable
- Built In Photocell
- Occupancy and Emergency Options
- Stand-alone 10kV Surge Protection
- Available in White and Bronze Finishes

Project: _____

Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Selectable Wattage: 65W–85W–110W
Selectable Kelvin: 3000K–4000K–5000K
Max Lumen Output: 13,174 Lumens
Max Efficacy: 125 lm/W
Voltage: 120–277 VAC
Input Frequency: 50/60 Hz
Surge Protection: Driver 6kV
10kV stand alone
Power Factor: ≥0.9
Operating Temperature: -40°F to 122°F (-40°C to 50°C)
Dimming: 0–10V
Dimming Range: 0-100%
CRI: >80
Dimensions: L14.21" x W9.57" x H8.15"
Weight (lbs): 11.88
Finish: BZ (Bronze)
L70 Lifetime Calculated per TM21: 149,000 hours
Warranty: 5 Year



Ordering Guide:

ESL	TYPE	SELECTABLE WATTAGE	GEN	SELECTABLE KELVIN	VOLTAGE	FINISH
ESL	FCWP	65110W	2	3050		BZ
(FCWP) Full Cut Off Wall Pack		(2555W) 25W–40W–55W (65110) 65W–85W–110W	(2) 2nd Gen	(3050) 3000K–4000K–5000K	(BLANK) 120–277 VAC	(BZ) Bronze (WH) White

FACTORY INSTALLED OPTIONS

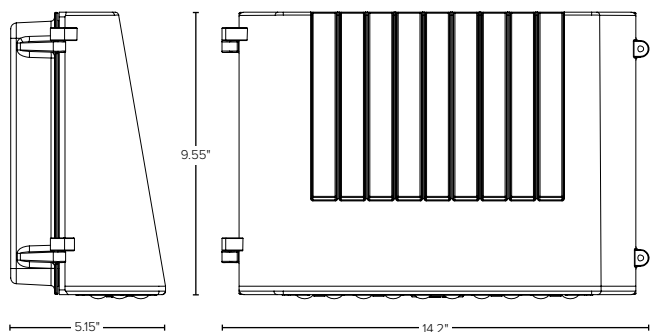
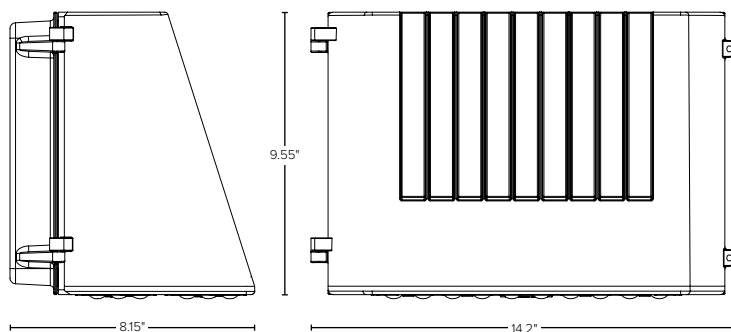
EM9	Emergency Backup Battery Unit, Auto Test Function, 9 Watts Output, 90 Minutes Minimum, 120–277 VAC Input, 30–200 VDC Output, Closed Lead Wiring, UL Listed for Factory Installation
11OCC	Microwave Occupancy Sensor

Catalog Data:

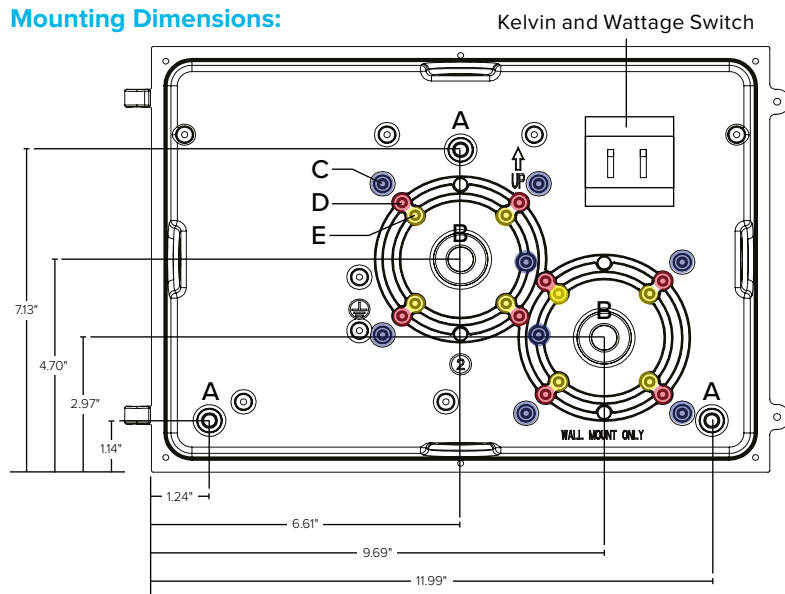
ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN*	MAX LUMEN OUTPUT	EFFICACY (lm/W)	DIMENSIONS	DLC QPL CODE
ESL-FCWP-2555W-23050-BZ	25–40–55	3000K–4000K–5000K	6,897	125	14.2" x 9.55" x 5.15"	S-2Q6DUH
ESL-FCWP-2555W-23050-WH	25–40–55	3000K–4000K–5000K	6,897	125		
ESL-FCWP-65110W-23050-BZ	65–85–110	3000K–4000K–5000K	13,174	125	14.2" x 9.55" x 8.15"	S-5BSL4M
ESL-FCWP-65110W-23050-WH	65–85–110	3000K–4000K–5000K	13,174	125		

Electrical Load — Standard Voltage:

SYSTEM WATTS	INPUT CURRENT				INPUT WATTAGE	INPUT FREQUENCY	POWER FACTOR	THD	OPERATING TEMPERATURE	SURGE PROTECTION	DIMMING
	120 VAC	208 VAC	240 VAC	277 VAC							
25	0.21	0.12	0.10	0.09	120–277 VAC	50/60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	6kV Driver 10kV Stand-Alone	0–10V Range 0–100%
40	0.33	0.19	0.17	0.14	120–277 VAC	50/60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	6kV Driver 10kV Stand-Alone	0–10V Range 0–100%
55	0.46	0.26	0.23	0.20	120–277 VAC	50/60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	6kV Driver 10kV Stand-Alone	0–10V Range 0–100%
65	0.54	0.31	0.27	0.23	120–277 VAC	50/60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	6kV Driver 10kV Stand-Alone	0–10V Range 0–100%
85	0.71	0.41	0.35	0.31	120–277 VAC	50/60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	6kV Driver 10kV Stand-Alone	0–10V Range 0–100%
110	0.92	0.53	0.46	0.40	120–277 VAC	50/60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	6kV Driver 10kV Stand-Alone	0–10V Range 0–100%

Dimensions:
2555W

65110W


Mounting Dimensions:



Drill the mounting holes (A), and if pulling wire from a j-box, drill the appropriate center hole (B) and j-box holes (C, D, or E). There are two possible j-box locations, only drill the required holes.

Photometric Lighting Diagram:

