



GEOMETRIC WALL PACK

ESL-WPTP-2565W-13050-WH

Key Features & Benefits:

- Kelvin and Wattage Selectable
- Built-In Replaceable Photocell
- Quick-Mount Plate and Built-in Level
- Visual Comfort Lens
- 10kV Surge Protector
- Available in Bronze and White Finishes

Project: _____


Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Selectable Wattage: 25W–45W–65W
Selectable Kelvin: 3000K–4000K–5000K
Max Lumen Output: 8,060 Lumens
Max Efficacy: 124 lm/W
Voltage: 120–277 VAC
Input Frequency: 50/60 Hz
Surge Protection: 10kV Stand Alone
Power Factor: ≥0.94
THD: ≤10%
Operating Temperature: -40°F to 104°F (-40°C to 40°C)
Dimming: 0–10V
Dimming Range: Dim to Off
Dim to Off: true
CRI: >70
Dimensions: L16.54" x W9.25" x H7.09"
Weight (lbs): 11.9
Finish: WH (White)
L70 Lifetime Calculated per TM21: 90,000 hours
Warranty: 7 Year

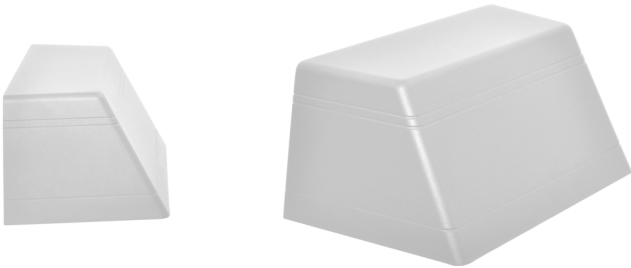

Ordering Guide:

ESL	TYPE	SELECTABLE WATTAGE	GEN	SELECTABLE KELVIN	FINISH
ESL	WP	2565W	1	3050	WH
(WPTP) Wall Pack Trapezoid (2565W) 25W–45W–65W (1) 1st Gen (3050) 3000K–4000K–5000K (BZ) Bronze (WH) White					

FACTORY INSTALLED OPTIONS

EM9

Emergency Backup Battery Unit, Auto Test Function, 9 Watts Output, 90 Minutes Minimum, 120–277 VAC Input, 10–300 VDC Output, Open Terminal Block Wiring, UL Listed for Factory or Field Install, Title 20

Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	DIMENSIONS (LxWxH)	DLC QPL CODE
ESL-WPTP-2565W-13050-BZ	25W–45W–65W	3000K–4000K–5000K	8,060	124	9.25" x 16.5" x 7.1"	S-B8PKWL
ESL-WPTP-2565W-13050-WH	25W–45W–65W	3000K–4000K–5000K	8,060	124	9.25" x 16.5" x 7.1"	S-B8PKWL


Photometrics:

LEGEND

- 20 fc
- 10 fc
- 5 fc
- 1 fc
- 0.5 fc
- 0.1 fc
- 50% Max Cd
- Max Cd

Distances are based on units of 25' mounting height

Geometric Wall Pack
ESL-WPTP-2565W-13050-XX
(based on 65W and 4000K)

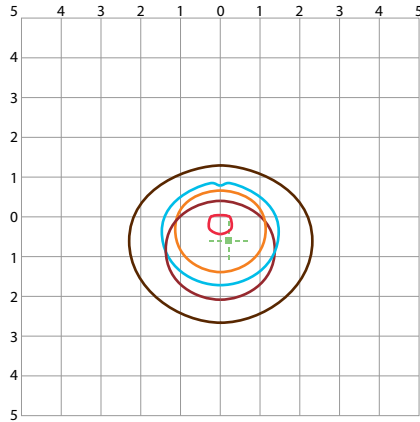


LCS Table

Geometric Wall Pack
ESL-WPTP-2565W-13050-XX – BUG Rating: B3–U2–G1
(based on 65W and 4000K)

	BUG Rating	Lumens	Lumens%
Forward Light	Low (0–30)	1,528.9	18%
	Medium (30–60)	3,323.8	39.1%
	High (60–80)	1,142.6	13.4%
	Very High (80–90)	85.9	1%
Back Light	Low (0–30)	1,046.9	12.3%
	Medium (30–60)	1,120.8	13.2%
	High (60–80)	203.4	2.4%
	Very High (80–90)	16.2	0.2%
Uplight	Low (90–100)	6.0	0.1%
	High (100–180)	25.7	0.3%
Trapped Light		7.5	0.1%

Dimensions:

Geometric Wall Pack
ESL-WPTP-2565W-13050-XX

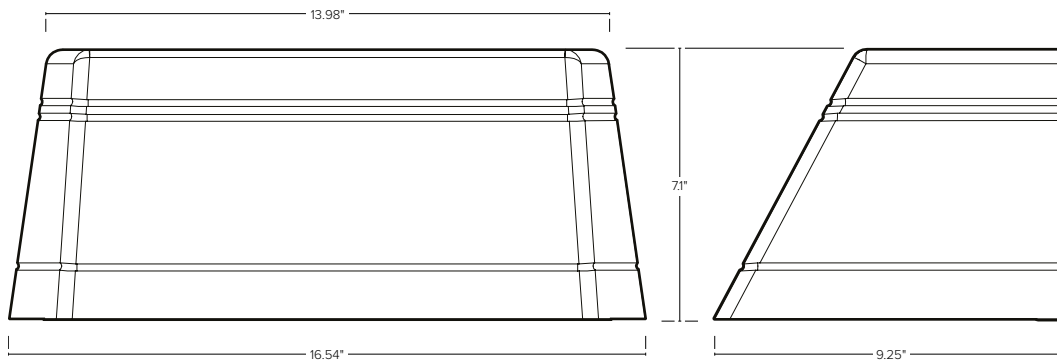

Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT	LUMEN MULTIPLIER
0 °C 32 °F	1.02
10 °C 50 °F	1.01
20 °C 68 °F	1.00
25 °C 77 °F	1.00
30 °C 86 °F	1.00
40 °C 104 °F	0.99
50 °C 122 °F	0.96

