

### Key Features & Benefits:

- Kelvin and Wattage Selectable
- Low Profile Design
- Port for Motion Sensor

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_

### Product Specifications:

Selectable Wattage: 20W–30W–40W  
 Selectable Kelvin: 3500K–4000K–5000K–5700K–6500K  
 Lumens: Up to 5,200  
 Efficacy: Up to 130 lm/W  
 Input Voltage: 120–277 VAC  
 Input Frequency: 50/60 Hz  
 Operating Temperature: -4°F to 113°F (-20°C to 45°C)  
 Dimming: 0–10V  
 Power Factor: >0.98  
 CRI: >80  
 Warranty: 5 Years  
 L70 Lifetime 75,000 Hours calculated per TM21  
 Dimensions: 48" x 11.8" x 6.3"  
 Weight (lbs): 22.05 lbs



### Ordering Guide:

ESL	FAMILY	TYPE	SELECTABLE WATTAGE	GENERATION	SELECTABLE KELVIN
ESL	CSS <small>(CSS) Contractor Series Selectable</small>	810 <small>(810) Wrap</small>	2040W <small>(2040W) 20W–30W–40W</small>	D <small>(D) 1st Gen</small>	3565K <small>(3565K) 3500K–4000K–5000K–5700K–6500K</small>


### Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	INPUT VOLTAGE
ESL-CSS-810-4-2040W-D3565K	20W–30W–40W	3500K–4000K–5000K–5700K–6500K	5,200	130	120–277 VAC

### Electrical Load — Standard Voltage:

SYSTEM WATTS	INPUT CURRENT				INPUT WATTAGE	INPUT FREQUENCY	OPERATING TEMPERATURE	DIMMING
	120 VAC	208 VAC	240 VAC	277 VAC				
20	0.17	0.10	0.08	0.07	120–277 VAC	50/60 Hz	-4°F to 113°F (-20°C to 45°C)	0–10V Dimming
30	0.27	0.15	0.13	0.12	120–277 VAC	50/60 Hz	-4°F to 113°F (-20°C to 45°C)	0–10V Dimming
40	0.40	0.23	0.20	0.17	120–277 VAC	50/60 Hz	-4°F to 113°F (-20°C to 45°C)	0–10V Dimming

### Dimensions:

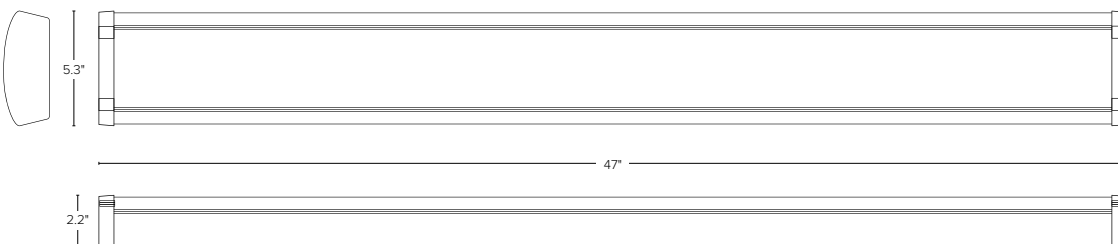

### Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT	LUMEN MULTIPLIER
0 °C	1.02
10 °C	1.01
20 °C	1.00
25 °C	1.00
30 °C	1.00
40 °C	0.99
50 °C	0.96