

Key Features & Benefits:

- Selectable CCT and Wattage
- Strong Spring Clips Secure Fixture to Drywall, Ceiling Tiles, or Mounting Plate
- Wet Location Rated
- Energy Star Listed
- Cast Aluminum Housing and Trim

Project: _____ Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Selectable Wattage:
18W–23W–28W–35W–40W

Selectable Kelvin:
3000K–3500K–4000K–5000K–6500K

Lumens:
1,800–2,300–2,800–3,500–4,000

Efficacy: Up to 100 lm/W

CRI: 90+

Input Voltage: 110–277 VAC

Power Factor: >0.98

Input Frequency: 50/60Hz Operating

Temperature: -4°F to 104°F Operational

Lifetime: 50,000 Hrs Dimming: 1–10V



Dimensions:

Fixture (ØxH): Ø11.55"x 5.5"

Flexible Metal Conduit (MC) Length: 17.75"



Ordering Guide:

ESL	TYPE	SIZE	SELECTABLE WATTAGE	GENERATION	SELECTABLE KELVIN	OPTIONS
ESL	OPT (OPT) Optus Series	10 (10) Round 10"	1840W (1840W) 18W-23W-28W-35W-40W	3 (3) Generation	3065K (3065K) 3000K–3500K–4000K–5000K–6500K	

FACTORY INSTALLED OPTIONS

EM8 Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery. (SL6)


FIELD INSTALLED ACCESSORIES

ESL-EMG-SL6-CSC-8W Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery.

Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE
4" ESL-OPT-4-0616W-33065K	6W-9W-12W-14W-16W	3000K-3500K-4000K-5000K-6500K	600-900-1,200 1,400-1,600	100	120-277 VAC
6" ESL-OPT-6-0520W-33065K	5W-9W-12W-16W-20W	3000K-3500K-4000K-5000K-6500K	500-900-1,200 1,600-2,000	100	120-277 VAC
8" ESL-OPT-8-1635W-33065K	16W-22W-26W-30W-35W	3000K-3500K-4000K-5000K-6500K	1,200-1,600-2,000 2,600-3,300	100	120-277 VAC
10" ESL-OPT-10-1840W-33065K	18W-23W-28W-35W-40W	3000K-3500K-4000K-5000K-6500K	1,600-2,200-2,600 3,300-3,500	100	120-277 VAC


Dimensions:

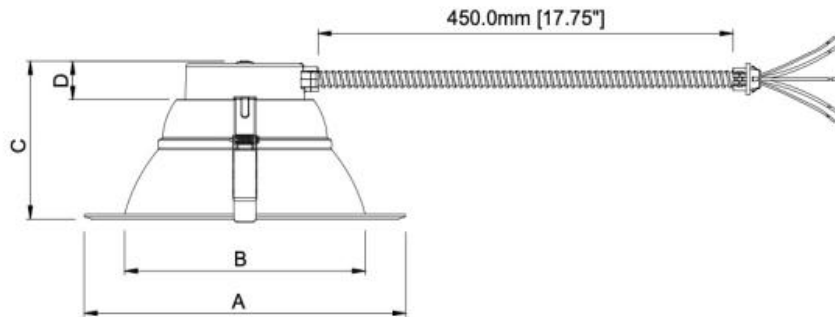


SIZE	ESL-OPT-4-0616W-33065K	ESL-OPT-6-0520W-33065K	ESL-OPT-8-1635W-33065K	10-INESL-OPT-10-1840W-33065K
DIMENSIONS	ø5.95"A x 3.63"C	ø8.31"A x 4.38"C	ø10.3"A x 4.9"C	ø11.55"A x 5.5"C
CUTOUT	ø4.0" ~ 5.0"	ø6.2" ~ 7.3"	ø8.0" ~ 9.2"	ø9.0" ~ 10.3"

Rough-In Plate Dimensions:

4" Plate

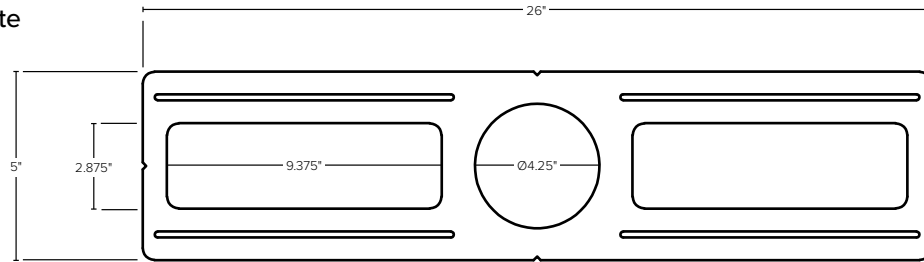

6" Plate

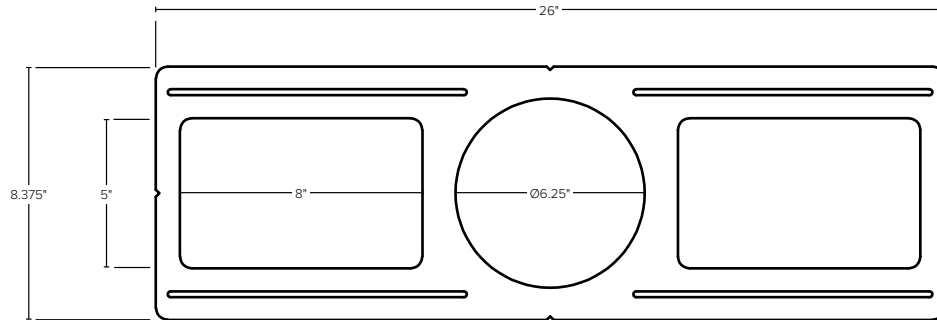

8" Plate

