

Key Features & Benefits:

- Resistant to Shock and Vibration
- Emergency Back Up Capable
- IK10 Impact Rated
- ABS Certified
- Marine Rated Powder Coating
- Standard 10kV Surge Protection

Project:

Date:

Catalog #:

Notes:

Product Specifications:

Power: 20–120 Watts
 Lumen Output: Up to 16,800 Lumens
 Efficacy (lm/W): Up to 140 Lumens per Watt
 Kelvin: 3000K, 4000K, 5000K
 CRI: >70
 Power Frequency: 50/60Hz
 Power Factor: >0.9
 Operating Temperature: -40°F–140°F (-40°C–60°C)
 Input Voltage: MV 120–277 VAC, HV 200–480 VAC,
 DC12–48V
 Life Span: >150,000 Hours
 Warranty: 7 Year Warranty with 10 Year Option
 Product Weight:
 26.45 lbs — Small
 40.79 lbs — Large



Certifications & Ratings:

Class I, Division 1, Groups C,D
 Class I, Division 2, Groups A,B,C,D
 Class II, Division 1, Groups E,F,G
 Class II, Division 2, Groups F,G
 Class III
 UL 1598, UL 1598A — Standard for Luminaires for
 Installation on Marine Vessels
 UL844 — Standard for Luminaires for Use in
 Hazardous Locations
 IK10
 ABS Certified
 Marine Rating Powder Coated
 IP66



Ordering Guide:

ESL	TYPE	SIZE	WATTAGE	HAZARD LEVEL	KELVIN	INPUT VOLTAGE	BEAM ANGLE	OPTIONS
ESL	HZLHB	(sz)	(yy)W	1	(xx)	(zz)	(bb)	
	(HZLHB) Hazardous Linear High Bay	(S) Small (L) Large	20W, 40W, 60W, 80W, 100W, 120W	(1) Class 1 Division 1	(30) 3000K (40) 4000K (50) 5000K	(Blank) MV 120–277 VAC (HV) 200–480 VAC (DC12) DC12–48V	(60D) (90D) (120D) Default	

FIELD INSTALLED ACCESSORIES

ESL-HZLHB-EMG Emergency Back Up Unit for Hazardous Linear High Bay Series




Catalog Data:


ITEM#	WATTAGE	KELVIN (xx)	LUMENS	EFFICACY lm/W	INPUT VOLTAGE	DIMENSIONS (LxWxH)
ESL-HZLHB-S20W-1xx-zz-bb	20W	(30) 3000K (40) 4000K (50) 5000K	2,800	140	(Blank) MV 100–277VAC (DC12) DC12–48V	23.3" x 5.5" x 6.06"
ESL-HZLHB-S40W-1xx-zz-bb	40W		5,600	140	(Blank) MV 100–277VAC (HV) 200–480VAC (DC12) DC12–48V	
ESL-HZLHB-S60W-1xx-zz-bb	60W		8,400	140		
ESL-HZLHB-L80W-1xx-zz-bb	80W		11,200	140		
ESL-HZLHB-L100W-1xx-zz-bb	100W		14,000	140		46.1" x 5.5" x 6.06"
ESL-HZLHB-L120W-1xx-zz-bb	120W		16,800	140		

Lighting Distribution:


40 Degree

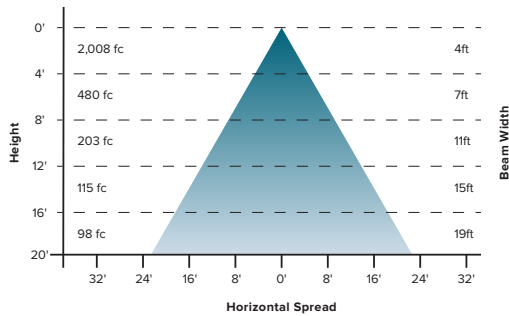


90 Degree

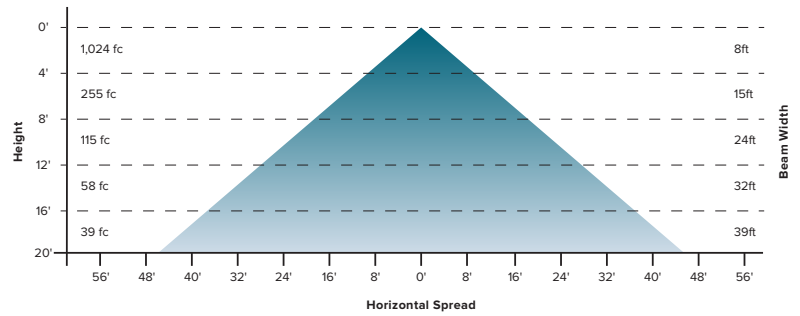

60 Degree

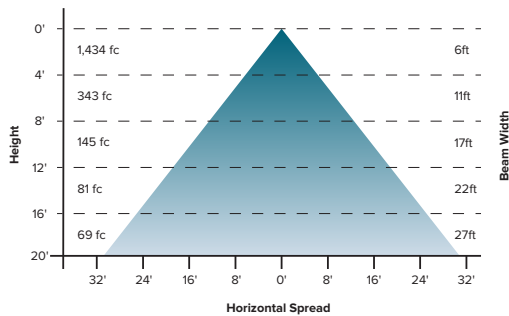


120 Degree

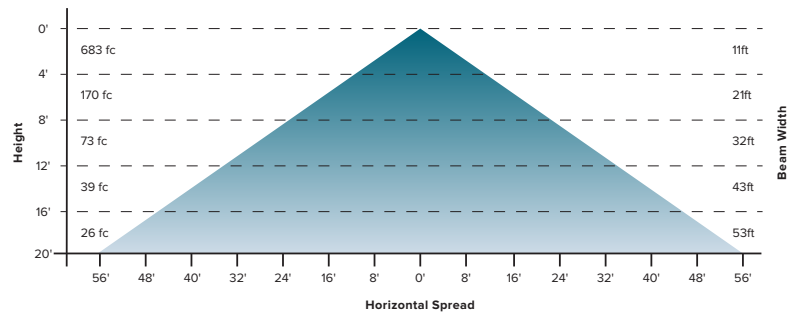


Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT	LUMEN MULTIPLIER
0 °C 32 °F	1.02
10 °C 50 °F	1.01
20 °C 68 °F	1.00
25 °C 77 °F	1.00
30 °C 86 °F	1.00
40 °C 104 °F	0.99
50 °C 122 °F	0.96

Fixture Dimensions:

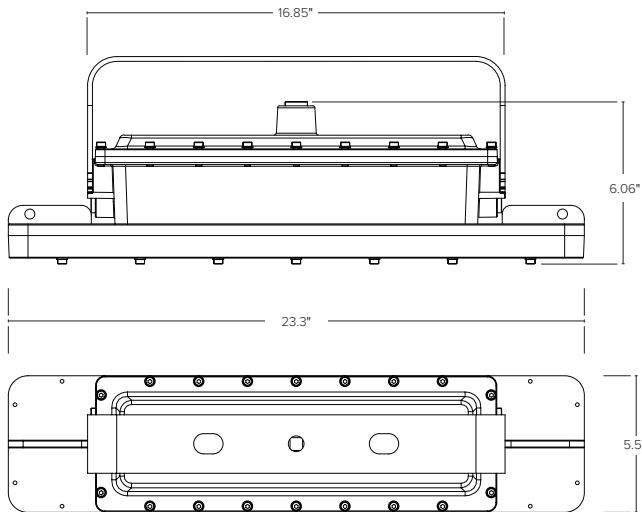


Small

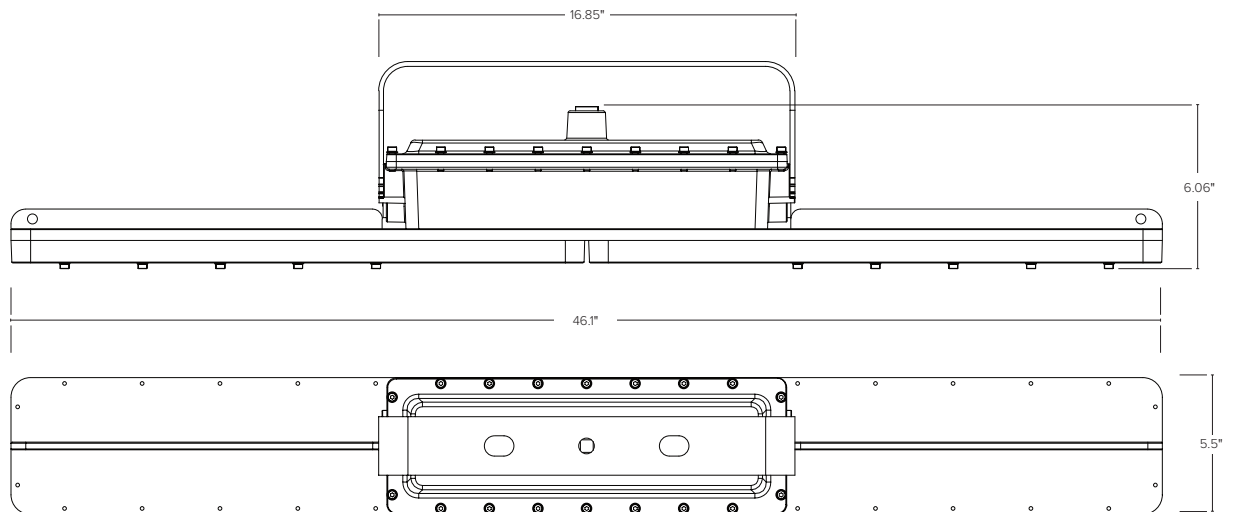

Large

Mounting Diagrams:

Ceiling Mounting



Pole Pendant Mounting

