



FLOOD LIGHT SERIES

ESL-FLD-105150W-13050-BZ

Key Features & Benefits:

- Wattage Selectable
- Kelvin Selectable
- Comes Standard with Multiple Mounting Options in the box
- Integrated Photocell That Can be Turned On or Off as Needed
- Optional Factory Fixed Wattage
- Bronze or White Finishes
- Durable Die-Cast Housing

Project: _____

Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Selectable Wattage: 105W–120W–150W
Selectable Kelvin: 3000K–4000K–5000K
Max Lumen Output: 20,154 Lumens
Max Efficacy: 144 lm/W
Voltage: 120–277 VAC
Input Frequency: 50/60 Hz
Power Factor: >0.9
THD: -
Operating Temperature: -40°F to 104°F (-40°C to 40°C)
Dimming: 0–10V
Dimming Range: 0-100%
Dim to Off: true
CRI: >80
Beam Angle: 60°
Cord Length: 6”
Dimensions: L14.02” x W3.27” x H9.02”
Weight (lbs): 14.26
Finish: BZ (Bronze)
L70 Lifetime Calculated per TM21: 145,000 hours
Warranty: 5 Year



Ordering Guide:

ESL	TYPE	SELECTABLE WATTAGE	GEN	SELECTABLE KELVIN	FINISH
ESL	FLD	105150W	1	3050	BZ
(FLD) Flood Light					
(1535W) 15W–25W–35W (5090W) 50W–70W–90W (105150W) 105W–120W–150W					
(1) 1st Gen					
(3050) 3000K–4000K–5000K					
(BZ) Bronze (WH) White					

FIELD INSTALLED ACCESSORIES

ESL-FL1-S-WG	Wire Guard for 1535W Flood Light
ESL-FL1-M-WG	Wire Guard for 5090W Flood Light
ESL-FL1-L-WG	Wire Guard for 90150W Flood Light
ESL-FL1-S-VSH	Vandal Shield for 1535W Flood Light
ESL-FL1-M-VSH	Vandal Shield for 5090W Flood Light
ESL-FL1-L-VSH	Vandal Shield for 105150W Flood Light
ESL-ACCS-PC-003	Photocell for FLD Flood Light


Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	LUMENS	EFFICACY (lm/W)	FINISH (ff)	MOUNTING	DIMENSIONS	DLC QPL CODE
ESL-FLD-1535W-13050-ff	15W	3000K	2,064	138	(BZ) Bronze (WH) White	Universal 1/2" Knuckle & Yoke	7.0" x 3.0" x 5.0"	S-HS5G97
		4000K	2,224	148				
		5000K	2,186	146				
	25W	3000K	3,258	130				
		4000K	3,480	139				
		5000K	3,379	135				
	35W	3000K	4,503	129				
		4000K	4,796	137				
		5000K	4,772	136				
	50W	3000K	6,909	138				
		4000K	7,415	148				
		5000K	7,337	147				
ESL-FLD-5090W-13050-ff	70W	3000K	9,085	130	(BZ) Bronze (WH) White	Universal 1/2" Knuckle & Yoke	10.5" x 3.25" x 7.0"	S-6A5JX3
		4000K	9,777	140				
		5000K	9,679	138				
	90W	3000K	10,967	122				
		4000K	11,896	132				
		5000K	11,473	127				
	105W	3000K	14,099	134				
		4000K	15,148	144				
		5000K	14,837	141				
	120W	3000K	15,591	130		Slip Fitter & Yoke	14.0" x 3.25" x 9.0"	S-EGJSRO
		4000K	16,590	138				
		5000K	16,027	134				
	150W	3000K	19,557	130				
		4000K	20,793	139				
		5000K	20,154	134				


Dimensions:

1535W

Knuckle Mount

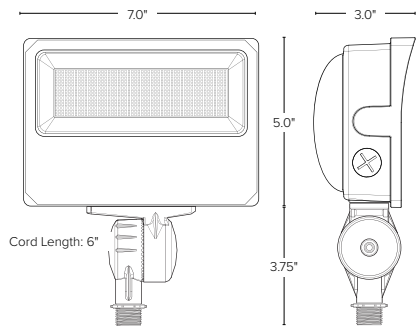


Yoke Mount

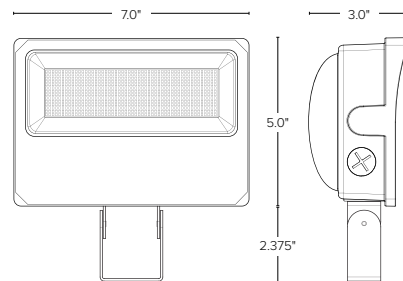


5090W

Knuckle Mount

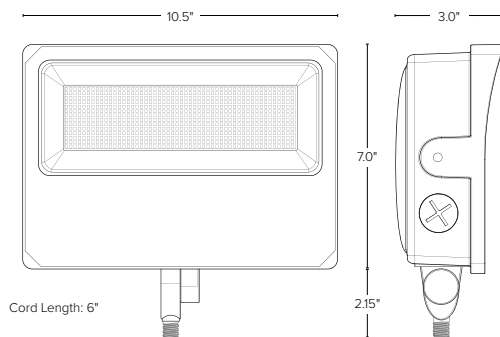


Yoke Mount

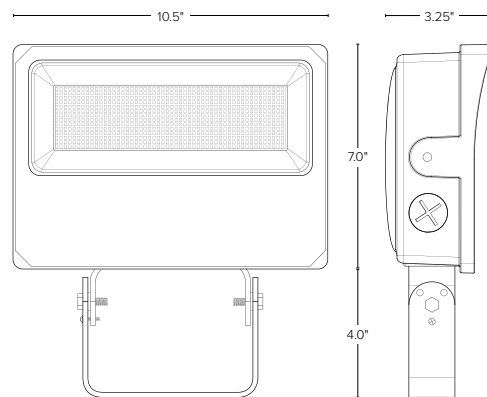

105150W

Slip Fitter

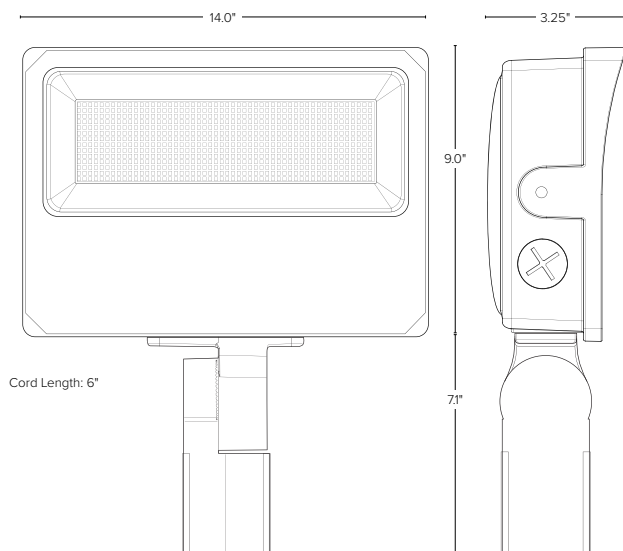

Yoke Mount

