



LED MINI WALL PACK SERIES

ESL-MWP-0815W-13050-BZ

Key Features & Benefits:

- Two-piece Aluminium Housing with Easy Driver
- 1–10V dimming
- Standard Photocell with Quick Disconnect
- Two Wattage Adjustable Models – 8W, 12W, 15W and 15W, 20W, 30W
- Available in Bronze or White

Product Specifications:

Selectable Wattage: 8W–12W–15W
Selectable Kelvin: 3000K–4000K–5000K
Max Lumen Output: 1,901 Lumens
Max Efficacy: 130 lm/W
Voltage: 120–277 VAC
Input Frequency: 50/60 Hz
Surge Protection: 2.5kV
Power Factor: ≥0.9
THD: ≤20%
Operating Temperature: -40°F to 113°F (-40°C to 45°C)
Dimming: 1–10V
Dimming Range: 1-100%
CRI: >80
Dimensions: L2.95" x W5.79" x H8.15"
Weight (lbs): 2.29
Finish: BZ (Bronze)
L70 Lifetime Calculated per TM21: 60,000 hours
Warranty: 10 Year

Project: _____

Date: _____

Catalog #: _____

Notes: _____



Ordering Guide:

ESL	TYPE	SELECTABLE WATTAGE	GEN	SELECTABLE KELVIN	VOLTAGE	FINISH
ESL	MWP	815W	1	3050		BZ
MWP (Mini Wall Pack) (1530W) 15W–20W–30W (1) 1st Gen (3050) 3000K–4000K–5000K (BZ) Bronze (WH) White						



LED MINI WALL PACK SERIES

ESL-MWP-0815W-13050-BZ


Catalog Data:

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/w)	DIMENSIONS (LxWxH)	DLC QPL CODE
ESL-MWP-0815W-13050-XX	8W-12W-15W	3000K-4000K-5000K	2,100	140	5.79" x 8.15" x 2.95"	PLTGVQTC1Q26
ESL-MWP-1530W-13050-XX	15W-20W-30W	3000K-4000K-5000K	4,200	140	5.79" x 8.15" x 2.95"	PLOSY5F7JQTI

Electrical Load — Standard Voltage:

SYSTEM WATTS	INPUT CURRENT				INPUT WATTAGE	INPUT FREQUENCY	POWER FACTOR	THD	OPERATING TEMPERATURE	DIMMING
	120 VAC	208 VAC	240 VAC	277 VAC						
8	0.07	0.04	0.03	0.03	120-277 VAC	50/60 Hz	≥0.9	≤20%	-40°F to 113°F (-40°C to 45°C)	1-10V
12	0.10	0.06	0.05	0.04	120-277 VAC	50/60 Hz	≥0.9	≤20%	-40°F to 113°F (-40°C to 45°C)	1-10V
15	0.13	0.07	0.06	0.05	120-277 VAC	50/60 Hz	≥0.9	≤20%	-40°F to 113°F (-40°C to 45°C)	1-10V
20	0.17	0.10	0.08	0.07	120-277 VAC	50/60 Hz	≥0.9	≤20%	-40°F to 113°F (-40°C to 45°C)	1-10V
30	0.25	0.14	0.13	0.11	120-277 VAC	50/60 Hz	≥0.9	≤20%	-40°F to 113°F (-40°C to 45°C)	1-10V

Light Distribution:

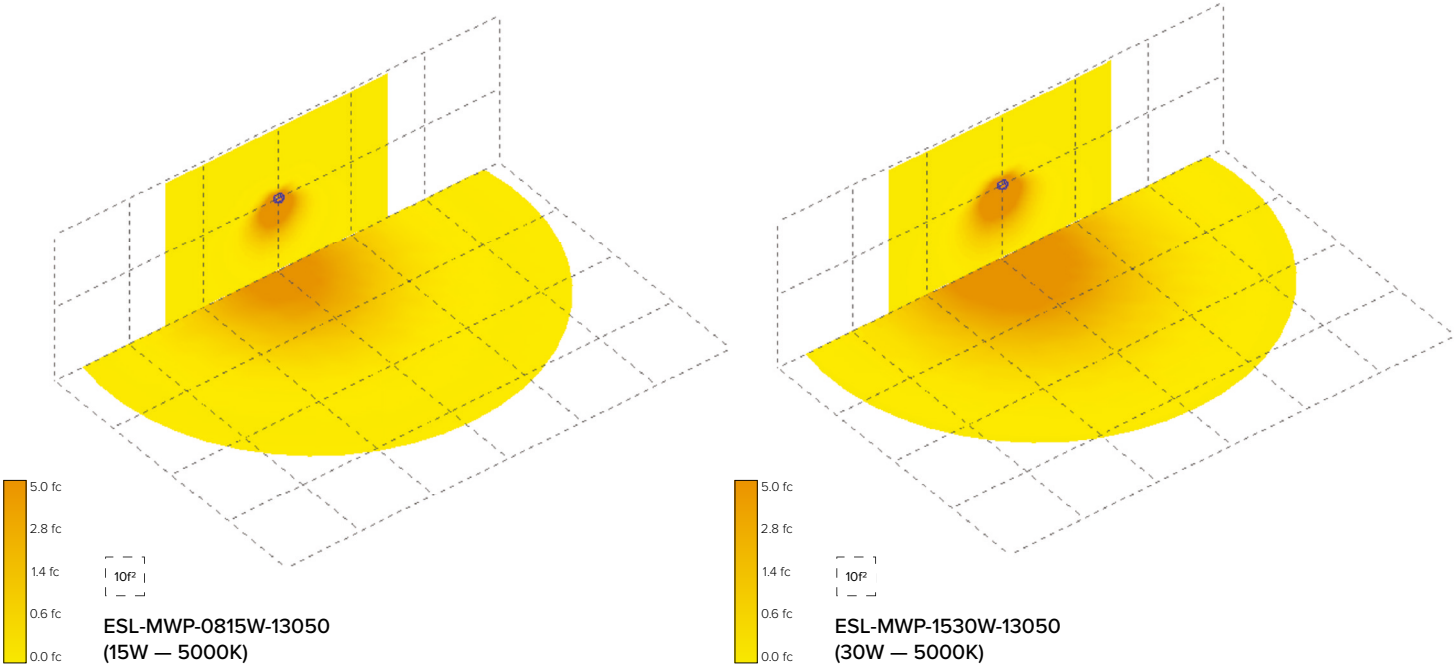




LED MINI WALL PACK SERIES

ESL-MWP-0815W-13050-BZ

Dimensions:

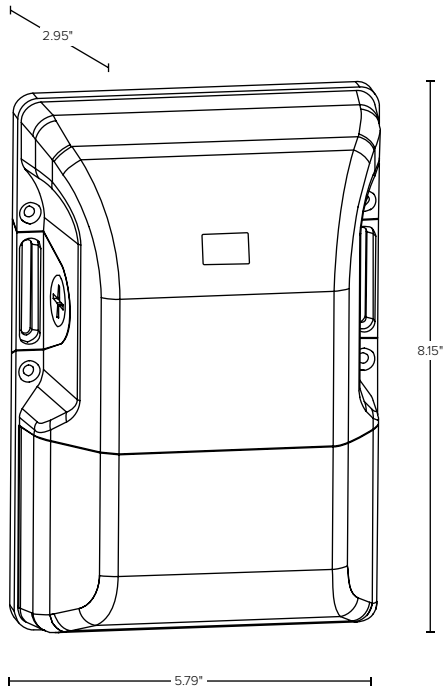

Lumen Ambient Temperature (LAT) Multipliers:

AMBIENT		LUMEN MULTIPLIER
0 °C	32 °F	1.02
10 °C	50 °F	1.01
20 °C	68 °F	1.00
25 °C	77 °F	1.00
30 °C	86 °F	1.00
40 °C	104 °F	0.99
50 °C	122 °F	0.96