



APPLICATIONS

Aluminium profile designed for applications in which installation space constraints are fundamental. Thanks to the reduced cross-section, it fits in the smallest spaces perfectly. In the version with higher opaline cover, there is a greater diffusion of light and it can be installed under a suspended cabinet or in the doors of a book case. The hidden fastening clips make it an aesthetically pleasing element even if it is installed in full view.

DESCRIPTION

Profile in anodized extruded aluminium in a natural colour, or black on request. Cover in satin-finished opal methacrylate (wide or slim) or in a clear version. Anodized aluminium end caps. IP20 protection rating: protection against solid particles of dimensions greater than 12 mm and not protected against liquids.



CHARACTERISTICS AND ADVANTAGES

- Reduced cross-section.
- Easy installation with hidden clips.
- Various cover versions.

COVER VARIANTS

Without cover




With clear cover



With slim opaline cover



With higher opaline cover

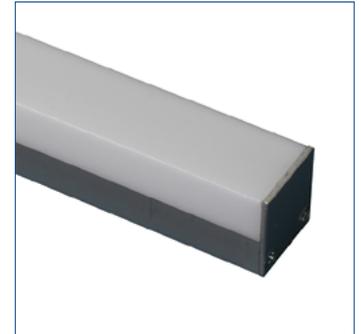

OPTICS AND TABLE OF COMBINATIONS




120°




120°

MDL 753020	MDL 1503020	MDL 755630	MDL 1505630	MDL 753528 RGB
FLX 753020	FLX 1503020	FLX 755630	FLX 1505630	FLX 753528 RGB

MODULE TECHNICAL DRAWING

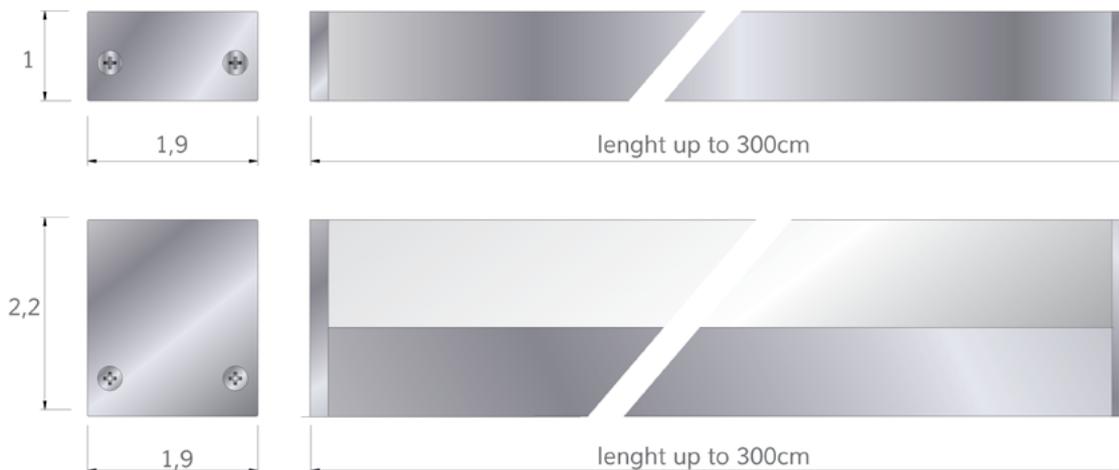

CODING

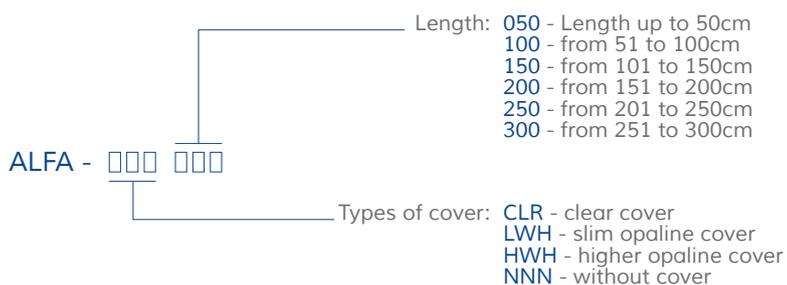

- Note: not all combinations of the characteristics are possible

MOUNTING KIT



ALFA

Fastening clips (2pcs.)	CMP00916
45° fastening clips (2pcs.)	CMP00917
Super-magnet (4pcs.)	CMP00918
90° profile connector (1pc.)	CMP00919
45° bracket for angle mounting, complete with 4 screws (2pcs.)	CMP00920
90° profile connector (1pc.)	CMP00922
Suspension kit for ceiling installation: 2 x 150cm long cables, diameter 1mm, 2 suspension brackets	CMP00923



BETA



GAMMA



DELTA



OMEGA

Fastening clips (2pcs.)	CMP00912
45° fastening clips (2pcs.)	CMP00913
Adjustable fastening clips (2pcs.)	CMP00914
Spring clip (1pc)	CMP00915

CONNECTIONS



Parallel connection multiple connector	CMP00868
--	----------

VARIOUS

Conformal coating L=1m	CMF
Resin filling L=1m	RES