

DELTA



APPLICATIONS

The Delta profile is particularly suitable for wall mounting to create up/down light lines or for hidden installation in walls and floors. Thanks to its "H" cross-section, cables can pass underneath the fixture, permitting the power supply of subsequent fixtures from a single point. Installation is facilitated by snap-in mounting. The 30° lens version allows to concentrate the light in a medium beam to light up the surfaces as wall washer, or to supply more flux where necessary.

DESCRIPTION

Profile in anodized extruded aluminium in a natural colour, or black on request. Cover in satin-finished opal methacrylate or in a clear version. Anodized aluminium end caps. Fastening profile in natural anodized extruded aluminium. IP20 protection rating; protection against solid particles of dimensions greater than 12mm and not protected against liquids.



CHARACTERISTICS AND ADVANTAGES

- Maximum uniformity.
- Easy installation.
- Installation with mounting profile
- Various cover versions.

COVER VARIANTS

Without cover




With clear cover




With 30° lens



With opaline cover

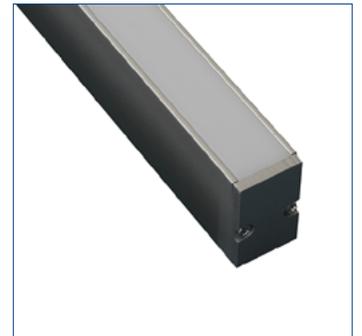

OPTICS AND TABLE OF COMBINATIONS

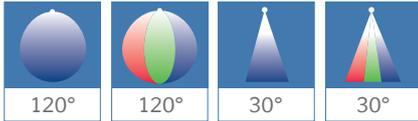


MDL 753020	MDL 1503020	MDL 755630	MDL 1505630	MDL 753528 RGB
FLX 753020	FLX 1503020	FLX 755630	FLX 1505630	FLX 753528 RGB

MODULE TECHNICAL DRAWING



CODING

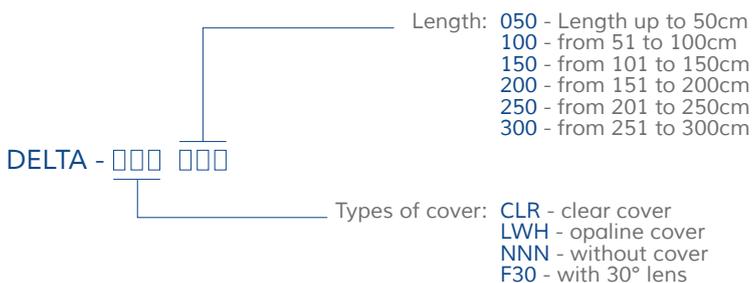

Note: not all combinations of the characteristics are possible

MOUNTING KIT



ALFA

Fastening clips (2pcs.)	CMP00916
45° fastening clips (2pcs.)	CMP00917
Super-magnet (4pcs.)	CMP00918
90° profile connector (1pc.)	CMP00919
45° bracket for angle mounting, complete with 4 screws (2pcs.)	CMP00920
90° profile connector (1pc.)	CMP00922
Suspension kit for ceiling installation: 2 x 150cm long cables, diameter 1mm, 2 suspension brackets	CMP00923



BETA



GAMMA



DELTA



OMEGA

Fastening clips (2pcs.)	CMP00912
45° fastening clips (2pcs.)	CMP00913
Adjustable fastening clips (2pcs.)	CMP00914
Spring clip (1pc)	CMP00915

CONNECTIONS



Parallel connection multiple connector	CMP00868
----------------------------------------	----------

VARIOUS

Conformal coating L=1m	CMF
Resin filling L=1m	RES