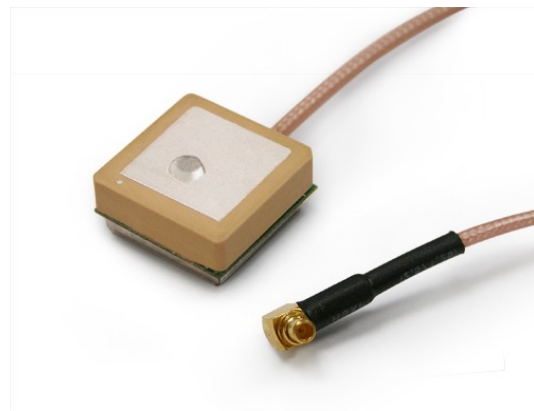

GPS Patch antenna

- **GPS Active Antenna**
- **27dB Gain**
- **High Sensitivity**
- **High Performance**
- **Dual Voltage**
- **Suitable for embedded applications**

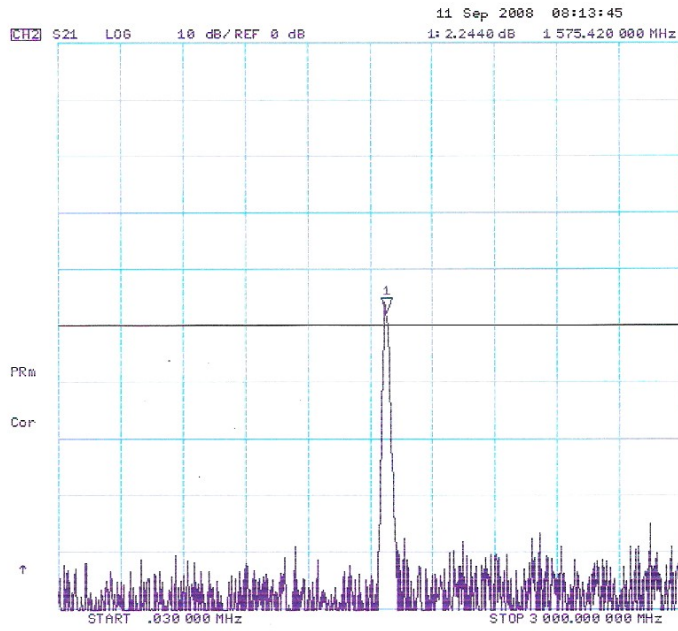
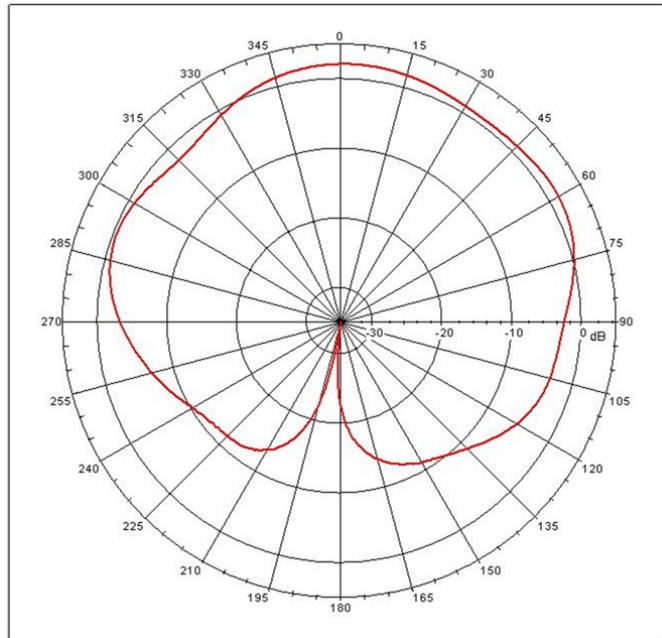


ADA-15S is a most compact/thin high gain GPS 3V and 5V antenna module. With comprehensive coverage almost all way to the horizon, it performs excellent in foliage or urban canyon environment. Also, ADA-15S is compatible with most GPS receives available on the market and provides a perfect alternative for the application of the GPS in different fields.

Specification

Category	GPS
Frequency	1575.42 ± 3 MHz
Polarization	R.H.C.P.
Antenna Gain	Typ. 0.5 dBic
Bandwidth	5 MHz min @S11-10 dB.
	LNA
Amplifier Gain	Typ 27 dB
Noise figure	Typ 1.5 dB
Output Impedance	50 Ω
VSWR	< 2.0:1
	Electrical Specifications
Supply Voltage	2.5 – 5.5 VDC
Power consumption	9.0 mA (3.3V DC)
Total Gain	25dB
Impedance	50 Ω
VSWR	< 2.0 : 1
RF Cable	RG 178/U (std), others available
Connector	Standard RF Connectors
	Overall Performance
GPS part size	15 x 15 mm
Weight	4 ± 0.5 grams
Mounting	Sticky tape
Operating temperature	-40 — +85 ° C
Storage temperature	-40 — +90 ° C

1575 MHz



Ordering codes

TYPE	Description	Comment
ADA-15S	Cable, length and Connector	GPS Patch antenna

For the latest updates, visit our Web site: www.adactus.se

Disclaimer

Information furnished is believed to be accurate and reliable. However, Adactus assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use.

Adactus reserves the right to make changes without further notice to any product herein to improve reliability, function or design. Adactus does not assume any liability arising out of the application or use of any product described herein.

This publication supersedes and replaces all information previously supplied.

Adactus products are not authorized as critical components in life support devices or systems.