


FEATURES

EDLC (Electric Double Layer Capacitor)

- High Power Density (Low ESR)
- Over 500,000 cycle life (semi-permanent)
- Higher energy density compared with 2.7V caps
- RoHS compliant



Drawing

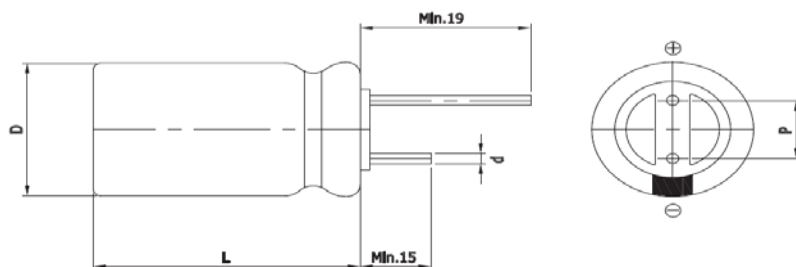

D (Φ).	13 +1.0 Max
L (mm)	46.0 ±1.5
d (Φ)	0.6 ±0.1
P (mm)	5.0 ±0.5

SPECIFICATION

ITEM		CHARACTERISTICS	
Product series		EDLC	
Rated Voltage (V_R)		3.0V	
Operating Temperature		-40 ~ +65 °C	
Capacitance Tolerance		-10 ~ +30%	
High Temperature Load Life		After 1,000 hours at V_R loaded under +65 °C, capacitors meet the following criteria.	
		Capacitance Change	≤ 30% of initial value
		ESR	≤ 2 times of specified value
Cycle Life Characteristics	Cycle	Over 500,000	
	ΔC	≤ 30% of initial value	
	ESR	≤ 2 times of specified value	
	Method	Cycle of Charge/discharge from V_R to $1/2V_R$	
Shelf Life		2 Years No Electrical Charge, Temperature below 70 °C (ΔC : ≤ 10% of initial value / ΔESR : ≤ 50% of initial value)	

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)	Size (mm)
			AC(1kHz)	DC			D x L
VEC 3R0 406 QC	3.0	40	17	30	26.0	0.120	13 x 46

* Max. Current : 1 sec. discharge to $1/2V_R$