


Installation manual

Unpack

After unpacking, Please check immediately for any damage caused by transportation. If you find any damage, please keep the packaging materials and notify the supplier within 7 days of the date of receipt then take out the spare parts that need to be installed on site, manual and Warranty Card.

Appropriate location selection

Place the hood in a convenient location. The installation height of the kitchen hood should be at least 65 cm above the gas stove, and between (65-75) cm is appropriate.

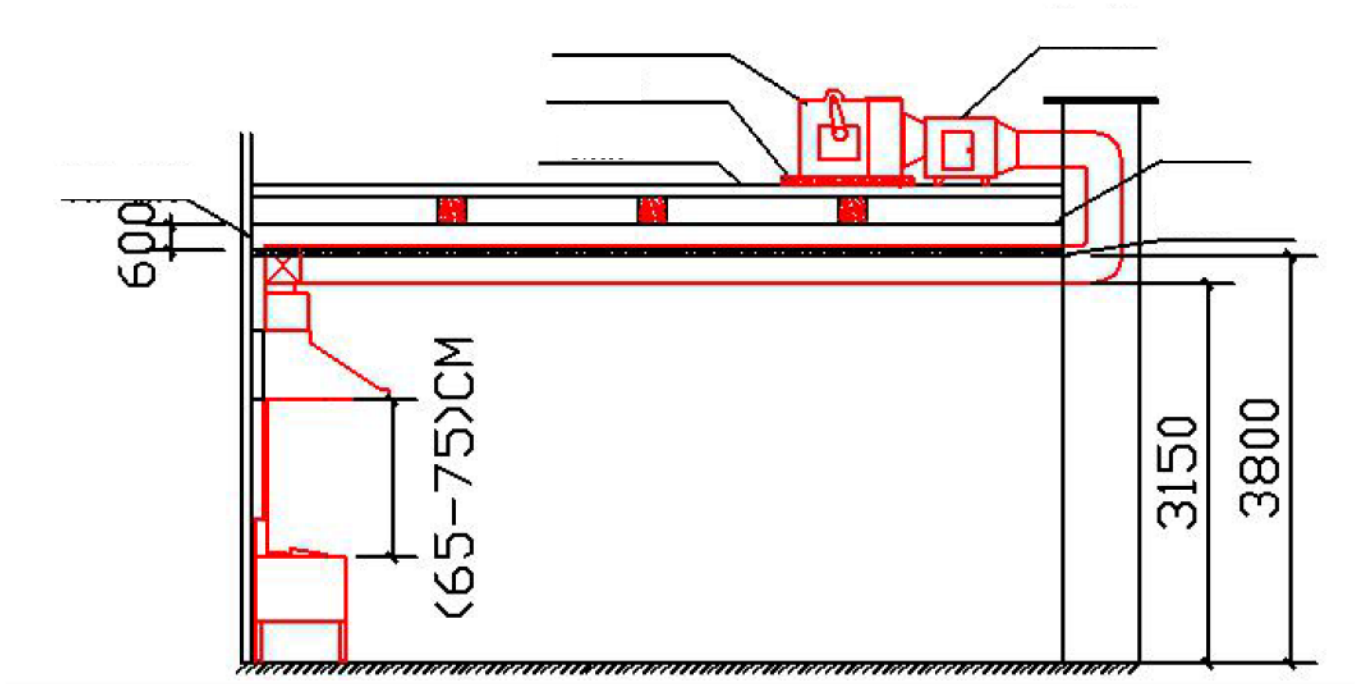

Installation steps

- 1.Fixed hood fixing plate: Drill holes in the installation position, Fix the hood hanging plate to the wall with screws
2. Hang the hood on the hanging plate: Hang the hood on the hanging plate and fix it with screws. Ensure that the exhaust hood is free of sloshing and tripping and keep it as horizontal as possible;
3. Installing the exhaust pipe: Connect one end of the exhaust pipe to the air outlet on the hood, The other end is connected to a shared flue or a hole on the outer wall. If using a shared flue, Do not insert the exhaust pipe too deep to increase the exhaust resistance. If the smoke is exhausted outside the wall, make sure that the exhaust pipe mouth extends 30MM to avoid refilling;
4. Install the grease nipple and screw the grease nipple.