

FACE-TEMP-QR-T

Green Pass Scanner : COVID EU

Passport

Turnstile installation | Ethernet |

Multilanguage


Fever Detection, Face Mask and

Facial Rec

Authentication with EU Servers

sVMS2000 Free software included

Relay output for doors or alarm

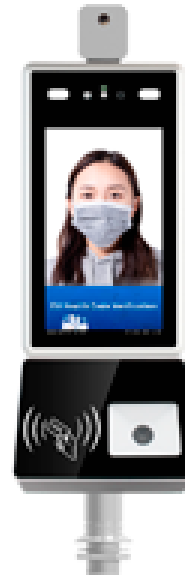

Stand-alone biometric access control reader

Face Recognition Identification and Covid EU Green Pass

Body temperature measurement

Accuracy $\pm 0.3^{\circ}$

Detection of fever and mask

7" IPS color display

Allows Covid vaccination certificates 19

Allows for PCR negative certificates

Allows negative certificates by antigen test

Allows certificates for recovering from Covid disease 19

Up to 22.400 faces & 100.000 registers

TCP/IP Communication

Integrated Controller (Relay or Alarm and Wiegand)

Dual sensor camera for face recognition

Turnstile installation

sVMS2000 Free management software

Specifications

CPU	Linux with 16G EMMC
Operating modes	Face recognition + Temperature + Mask + Green Pass Face recognition + Temperature + Mask Facial recognition + Temperature Green Pass + Temperature + Mask Green Pass + Temperature Facial recognition Green Pass Temperature Temperature + Mask
Certificate Verification	Updating and authentication with servers. Minimum connection required: 15 min per day for proper operation
Countries with Passport Compatibility	Spain, France, Portugal, Italy, Germany, Austria, Luxembourg, Belgium, Cyprus, Denmark, Greece, Latvia, Lithuania
Facial recognition sensor	Dual Lens with IR, White Light and WDR with Live Face Detection
Camera sensor	1/2.7" CMOS 2Mpx (1920x1080)
Camera Lens	4.5 mm
Activation sensor	Infrared auto-activation
Read time	< 0.5 Sec.
Capacity	Up to 22.400 faces/cards
Records	100.000 registers
Identification modes	Facial recognition
Temperature Sensor	Latest generation thermopile
Temperature Range	30? - 45?
Accuracy	±0.3?
Temperature measuring distance	0.3m ~ 0.8m
Proximity card	No
Screen	7" High Definition HD IPS
Audio	Audio message in Multilanguage and configurable volume
Communication	TCP/IP and USB (for card reader)
Languages	English, Spanish, Portuguese, Italian, French and German
Integrated controller	Wiegand Input, Wiegand Output, Relay (Configurable as opening relay or alarm)
Free Software	sVMS2000
Power	DC 12 V / 3 A (20W max.)
Degree of protection	Interior
Temp. operation	0° C ~ +50° C
Installation height	1.2 m ~2.2 m
Dimensions	123.5 (W) x 361.3 (H) x 84 (D) mm
Weight	2.7 Kg