


SF-AC2206-WRIP

SAFIRE

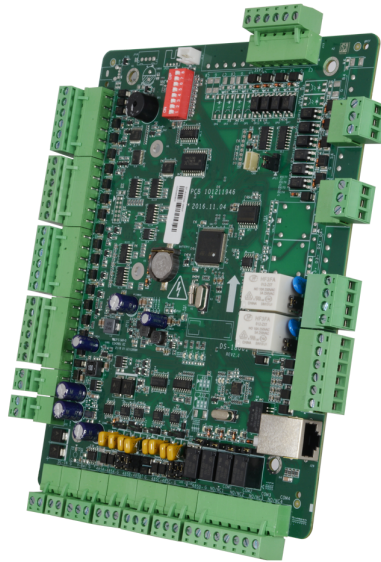

Features

- Safire
- Cashless biometric access controller
- Management of 2 doors
- Capacity for 100.000 cards & 300.000 registers
- Supports up to 4 Wiegand readers and 4 per RS485
- TCP/IP, OSDP, eHome, and ISAPI communication
- Input of 2 push buttons, 2 door sensors, 4 alarm inputs and 4 auxiliary inputs
- 2 relay outputs and 4 alarm outputs
- Relay configuration NO/NC
- Advanced features: locks, anti-passback and first user
- Compatible with Safire Control Center-software

Specifications

Brand	Safire
Model	SF-AC2206-WRIP
Hardware CPU	32bit MIPS CPU
Capacity	Up to 100.000 users (97.000 users / 3.000 visitors / 5.000 footprints)
Records	300.000 registers
Identification modes	Fingerprint, facial, card and/or passwords
Proximity card	RFID EM (125 kHz) or MF (13.56 MHz)
Communication	TCP/IP RS485 ISAPI eHome OSDP
Outputs	2 x relay outputs, 4 x alarm outputs
Inputs	4 x Wiegand 26, 2 x door sensor, 2 x open button, 4 x RS485, 4 x AUX, 4 x alarm, 1 x tamper
Software	Safire Control Center / Safire Control Center AC
Functions	Multi-door locks, anti-passback, multi-card, first opening card
Power	DC 12 V / 1 A max.
Temp. operation	-20° C ~ +65° C
Dimensions	215 (W) x 20 (H) x 180 (D) mm
Weight	500 g