


UV-UAC-B115-F40

Uniview

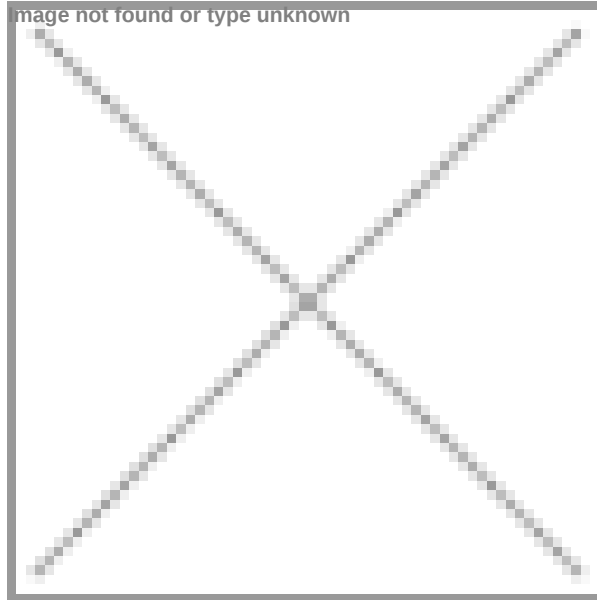

Features

- Uniview
- Analog Bullet Camera
- 1/2.7" Progressive Scan CMOS
- 5 Megapixel (2880x1620)
- 4 mm Lens
- 0.02 Lux
- IR Range 20 m
- Weatherproof IP67
- IR Cut
- TVI/AHD/CVI/CVBS

Specifications

Range	Uniview
Image sensor	1/2.7" Progressive Scan CMOS
Maximum resolution	5MP
Main Stream rate	5MP@25fps: 2880×1620; 5MP@20fps: 2592×1944; 5MP@12.5fps: 2592×1944
Extra Stream rate	4MP: 2560×1440; 2MP: 1920×1080
Lens	4 mm
Viewing Angle (FOV)	82.9° (H), 46.1° (V), 100.0° (D)
Minimum illumination	0.02 Lux (Colour)
Infrared range	20 m
Image improvements	BLC, HLC, DWDR, DAY/NIGHT MODE, 2D. DWDR. SMART IR
Day / Night	Mechanical ICR filter
Invert image (Flip)	Supports horizontal rotation of 180° and vertical rotation of 180°
Power	DC 12V / 3.6W
Video output	TVI: 5MP@20fps, 5MP@12.5fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps AHD: 5MP@20fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps CVI: 5MP@25fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps CVBS: PAL, NTSC
Interface	5.5 mm
Material	Plastic
Temp. operation	-30° C ~ 60° C
Degree of protection	Weatherproof IP67
Dimensions	142mm (L) * 63mm (W) * 65mm (H)
Weight	135 g