

XS-AC1200RE-EM

Access reader


Access by EM card

LED and acoustic indicator

Wiegand 34 | RS485

Compatible with X-Security controllers

Suitable for exterior IP66

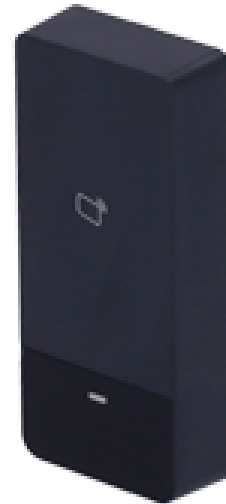

X-Security

Access reader for controller

Access by EM card

LED indicator

Wiegand 34 and RS485

Suitable for exterior IP66

Compatible with X-Security controllers

Specifications

Brand	X-Security
Model	XS-AC1200RE-EM
Reading distance	< 6 cm
Identification modes	Card (RFID EM 125 kHz)
Outputs	RS485, Wiegand 34, buzzer for status indication, tamper
Compatibility	X-Security Controllers XS-AC2200 Series and XS-AC1200 Series
Power	DC 9-15 V / 100 mA máx.
Degree of protection	Suitable for exterior IP66
Temp. operation	-30 °C ~ +60 °C
Dimensions	43 (W) x 96 (H) x 17 (D) mm
Weight	100 g