


# XS-AC1201-MFP

Access and Attendance control  
MF Card and keyboard  
30.000 recordings / 150.000 records  
TCP/IP, USB, RS485, Wiegand &  
Relay  
Suitable for exterior IP66  
Compatible with SmartPSS software

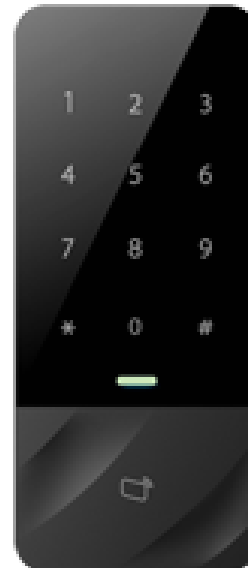

## X-Security

Stand-alone reader of access and time & attendance  
Identification by mifare card, password and/or combinations  
Touch keypad  
Capacity or up to 30.000 users & 150.000 registers  
128 groups, schedules and holiday calendars  
Communication TCP/IP, RS485, miniUSB and Wiegand 26  
Integrated controller (Door sensor, Push-button & Relay)  
Alarm input and output  
Control of schedules, shifts and cycles  
Anti-Passback and Lock Function  
Complete SmartPSS management software included

# Specifications

<b>Brand</b>	X-Security
<b>Hardware CPU</b>	32 Bit Processor + 16MB RAM
<b>Read time</b>	< 0.1 Sec.
<b>Capacity</b>	Up to 30.000 EM RFID cards
<b>Records</b>	150.000 registers
<b>Identification modes</b>	Card, PIN & combinations
<b>Proximity card</b>	MF (13.56 MHz)
<b>Screen</b>	Does not have
<b>Communication</b>	TCP/IP, USB
<b>Outputs</b>	Wiegand OUT, RS485, Relay, Alarm, Doorbell
<b>Inputs</b>	Door sensor, Open button, Alarm
<b>Special functions</b>	Anti-passback, multi-card open
<b>Software</b>	SmartPSS
<b>Power</b>	DC 9~15 V / 200 mA max.
<b>Degree of protection</b>	IP66
<b>Temp. operation</b>	-5° C ~ +55° C
<b>Dimensions</b>	97 (W) x 150 (H) x 16 (D) mm
<b>Weight</b>	300 g