


**Geberit low-height concealed cistern, 6 / 3 litres, remote flush actuation type 01**

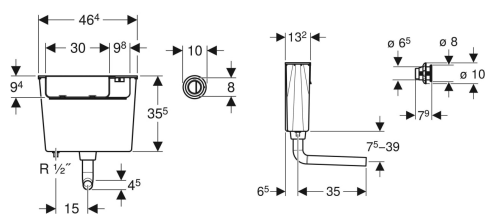

Example image

**Application purposes**

- For drywall construction
- For installation in bathroom furniture
- For installation in part-height prewall installations
- For low level installation
- For floor-standing WCs

**Characteristics**

- Flush actuation pneumatic
- Dual flush

**Scope of delivery**

- Pneumatic dual-flush actuator
- Flush bend 90°
- Fastening material for flush pipe
- Cup for flush volume reduction 4.0 / 2.6 l
- Fastening material

- Flush pipe connection with compression joint
- Cistern fulfils standard requirements in accordance with EN 14055, Class II
- Water supply connection on the bottom left

**Technical data**

Flow pressure	0.1-10 bar
Maximum operating temperature, water	25 °C
Flush volume, factory setting	5.8 and 3 l

Art. no.	Colour / surface	B	H	T
109.724.21.2	gloss chrome-plated	46.4 cm	35.5 cm	13.2 cm



- Supplied with 116.050.21.1 Type01 pneumatic actuator
- The cistern can be operated with used water (rainwater) provided it is passed through a filter system first