


Geberit Duofix crossbar for frame fastening, for stud clearance from 60 cm

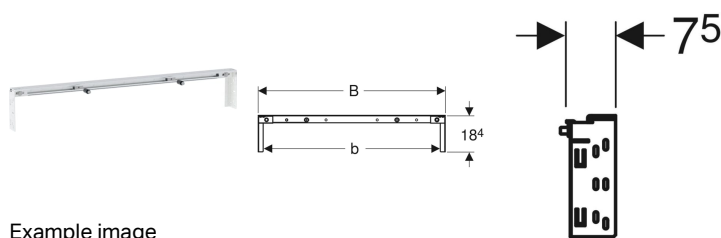

Application purposes

- For drywall construction
- For installation in room-height prewall installations
- For installation in room-height installation walls
- For installation in room-height Geberit Duofix system walls
- For mounting between studs, room height, for nominal widths 60, 75, 90, 105, 120 or 135 cm
- For creating niches for example for concealed mirror cabinets
- For fastening Geberit Duofix installation elements between two studs
- Necessary if fastening the washbasin element to the rear wall with wall anchors is not possible

Characteristics

- Zinc-plated
- Nominal width 60 cm suitable for washbasin elements with width 44 cm or 50 cm (restricted furniture fastening for 50 cm)
- Nominal widths 75 cm to 120 cm suitable for washbasin elements with width 50 cm
- Nominal widths 120 cm to 135 cm suitable for washbasin elements with width 44 cm or 50 cm (restricted furniture fastening for 50 cm)
- Nominal widths 120 cm to 135 cm suitable for double washbasins

Technical data

Product material | Steel

Scope of delivery

- 2 fixing brackets
- Fastening material for element for washbasin

Art. no.	Nominal width	B	b	
111.041.00.1	60 cm	65 cm	60 cm	New
111.042.00.1	75 cm	80 cm	75 cm	New
111.043.00.1	90 cm	95 cm	90 cm	New
111.044.00.1	105 cm	110 cm	105 cm	New
111.045.00.1	120 cm	125 cm	120 cm	New
111.046.00.1	135 cm	140 cm	135 cm	New

Accessories

- Geberit Duofix mounting plate for washbasin with cabinet and outlet tap concentric
- Geberit Duofix mounting plate for washbasin with cabinet and outlet tap eccentric
- Geberit Duofix mounting plate for washbasin with cabinet and two outlet taps
- Geberit Duofix fastening for central drain between two elements for washbasin