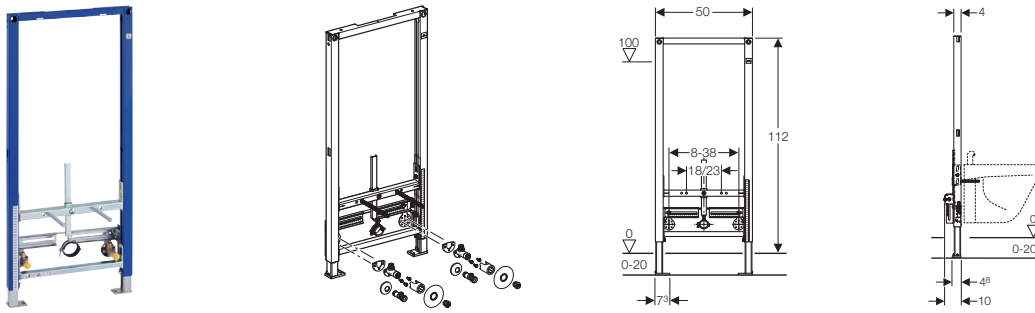


**111.545.00.1 - Geberit Duofix frame for bidet, H112****Application purposes**

- For drywall construction
- For installation in part- or room-height prewall installations
- For installation in room-height installation walls
- For installation in part- or room-height Geberit Duofix system walls
- For wall-hung bidets with deck-mounted tap
- For floor constructions 0–20 cm

**Characteristics**

- Self-supporting frame, powder-coated
- Frame with  $\varnothing$  9 mm drilling holes for fastening in wood frame construction
- Galvanized feet
- Feet adjustable 0–20 cm
- Fastening distance for wall-hung bidet 18 or 23 cm
- Height-adjustable bidet fastening
- Non-slip leg supports
- Rotatable foot plates
- Foot plate depth suitable for installation in U-profiles UW 50 and UW75 and Geberit Duofix system rails
- Fastening for connection bend, height-adjustable and sound-absorbing
- Tap attachments adjustable in width and height
- Self-adhesive sealing washer, fleece-laminated
- Protection plug for one-time pressure test with cold water up to a maximum of 15 bar / 1500 kPa

**Scope of delivery**

- 2 angle stop valves, 1/2"
- 2 elbow tap connectors Rp 1/2" - R 1/2", compatible with MeplaFix
- 2 sealing washers
- 2 sound insulation bases
- 2 insulating sleeves
- 2 protection plugs
- 2 threaded rods M12
- Fastening material



- Any boarding must be fixed tight up against the face of the Duofix frame and screwed directly to the frame
- Replacement for art. no. 111.526.00.1

**Internal data**

Art. no.                      In assortment of