



Geberit Type 323AG fill valve, bottom water supply connection, 1/2", nipple made of plastic



Example image

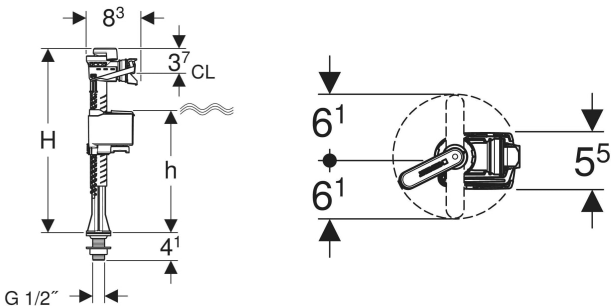

APPLICATION PURPOSES

- For Geberit exposed cisterns with bottom water supply connection
- For ceramic cisterns
- For Geberit low-height concealed cisterns
- For greywater (rainwater) with pH value 6.0–9.5, if a filter system is used
- For potable water
- For water supply connections 1/2"

CHARACTERISTICS

- Adjustable filling height
- Water supply connection on the bottom
- Threaded nipple made of plastic
- Backflow prevention type AG (free outlet with overflow)
- Fulfils requirements in accordance with BS 1212-4:2016, WRAS Section 2075

TECHNICAL DATA

Flow pressure	0.1–10 bar
Storage temperature	≤ 40 °C
Operating temperature, water	25 °C max.
Flow rate at 0.5 bar	0.06 l/s
Flow rate at 3 bar	0.17 l/s
Minimum flow pressure	0.1 bar

Art. no.	G "	B cm	H cm	h cm	T cm
136.760.00.1 New	1/2	5.5	30.6	15.4–23.4	8.3
136.761.00.1 New	1/2	5.5	30.6	15.4–23.4	8.3

Art. no.	G "	B cm	H cm	h cm	T cm
136.762.00.1 New	1/2	5.5	33.5	18.3–26.3	8.3

New articles available from 01.06.2025