Sanicubic 1 VX

Grey water, black water

Sanicubic 1 VX is a lifting station with 1 vortex pump. It is designed for lifting waste water from houses or small commercial premises. Sanicubic 1 VX has direct and safe access to the motor and level sensors. The lifting station comes with a classic control box and a wired alarm.



PERFORMANCE

• Max. head : 12 m

• Max. flow rate: 40 m³/h

PRODUCT BENEFITS


- Floor standing for easy installation
- Easy access for maintenance
- 3 inlets
- Vortex technology
- Direct and safe access to the motor
- Comes with classic control box
- Comes with wired alarm





DELIVERED AS STANDARD







Classic control box

OPTIONAL EXTRAS



Isolation valve DN50 shut-off valve Product code: 1109



Isolation valve DN100 shut-off valve Product code: 1107/1




Sanicubic carbon filter Product code: 1108 Barcode: 3308815077529



telephone: 0118 9821 555 email: support@pumptechnology.co.uk



DIMENSIONS

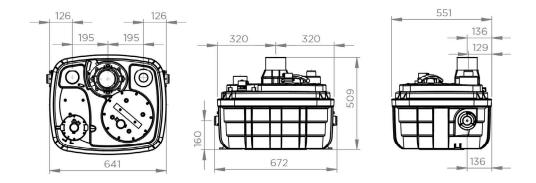

CURVE

H (m) 18 16 14 12 10 8 6 4 2 0 0 5 10 15 20 25 30 35 40 45 flow rate (m³/h)

CONNECTIONS



External inlet diameter: 40/50/100/110/125 mm

Discharge diameter ext.: 90/110 mm

Ext. ventilation diameter: 75 mm

Sanicubic 1 VX Type of control box Classic Material PP GF Tank Pump housing PA 12 GF PA 12 GF Motor housing PPO GF Impeller **Electrical features** Voltage (V) 230 Frequency (Hz) 50-60 Power consumption P1 (W) 2000 1400 Power output P2 (W) Mode of operation S3 15 % IP68 IP rating Hydraulics Max. head (m) 13.5 Max. flow rate (m³/h) 40 External inlet diameter (mm) 40/50/100/110/125 Discharge diameter ext. (mm) 90/110 Ext. ventilation diameter (mm) 75 Total volume (L) 60 Useable volume (L) 21 ON level /OFF level (mm) 165/95 Alarm level (mm) 235 50 Particle size (mm) 70°C Max. temperature of the pumped liquid (5 min) Type of impeller vortex Type of activation pneumatic **Identification and logistics** Gross weight (kg) 30 EAN code 3308815077611 Product code 30005