


## Geberit Xeno<sup>2</sup> illuminated mirror with direct and indirect lighting

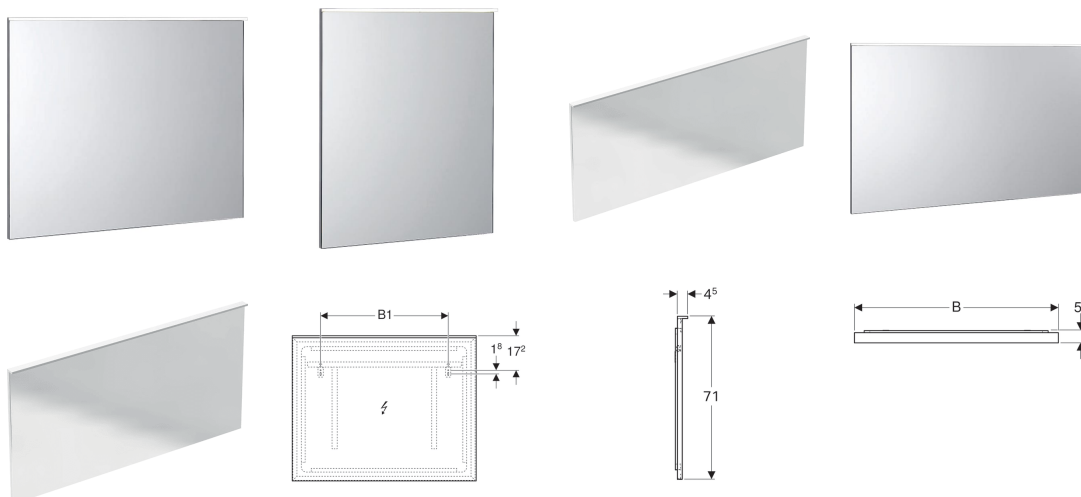

### Characteristics

- LED lighting

### Technical data

|                         |          |
|-------------------------|----------|
| Protection class        | I        |
| Protection degree       | IP44     |
| Nominal voltage         | 230 V AC |
| Mains frequency         | 50 Hz    |
| Operating voltage       | 12 V DC  |
| Output voltage          | 12 V DC  |
| Material                | Glass    |
| Energy efficiency class | A++      |

| Art. no.     | B      | B1      | H     | T      | Power consumption | Luminous flux | Luminous flux, indirect |
|--------------|--------|---------|-------|--------|-------------------|---------------|-------------------------|
| 500.521.00.1 | 60 cm  | 32.5 cm | 71 cm | 5.5 cm | 47.5 W            | 1495 lm       | 1960 lm                 |
| 500.522.00.1 | 90 cm  | 62.5 cm | 71 cm | 5.5 cm | 72.7 W            | 2275 lm       | 1960 lm                 |
| 500.203.00.1 | 140 cm | 91.5 cm | 71 cm | 5.5 cm | 98.6 W            | 3575 lm       | 2095 lm NEW             |
| 500.204.00.1 | 160 cm | 91.5 cm | 71 cm | 5.5 cm | 108 W             | 2940 lm       | 2940 lm NEW             |
| 500.519.00.1 | 120 cm | 71.5 cm | 71 cm | 5.5 cm | 87.2 W            | 3055 lm       | 2380 lm                 |