


Geberit Xeno² illuminated mirror with direct and indirect lighting

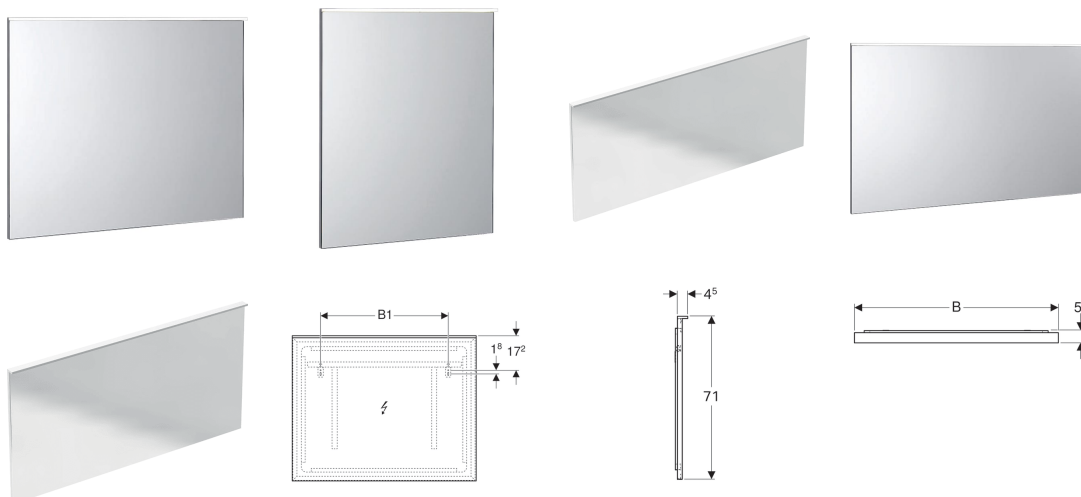

Characteristics

- LED lighting

Technical data

Protection class	I
Protection degree	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	12 V DC
Output voltage	12 V DC
Material	Glass
Energy efficiency class	A++

Art. no.	B	B1	H	T	Power consumption	Luminous flux	Luminous flux, indirect
500.521.00.1	60 cm	32.5 cm	71 cm	5.5 cm	47.5 W	1495 lm	1960 lm
500.522.00.1	90 cm	62.5 cm	71 cm	5.5 cm	72.7 W	2275 lm	1960 lm
500.203.00.1	140 cm	91.5 cm	71 cm	5.5 cm	98.6 W	3575 lm	2095 lm NEW
500.204.00.1	160 cm	91.5 cm	71 cm	5.5 cm	108 W	2940 lm	2940 lm NEW
500.519.00.1	120 cm	71.5 cm	71 cm	5.5 cm	87.2 W	3055 lm	2380 lm