


4.2.3 Mirrors

New

Geberit Xeno² illuminated mirror

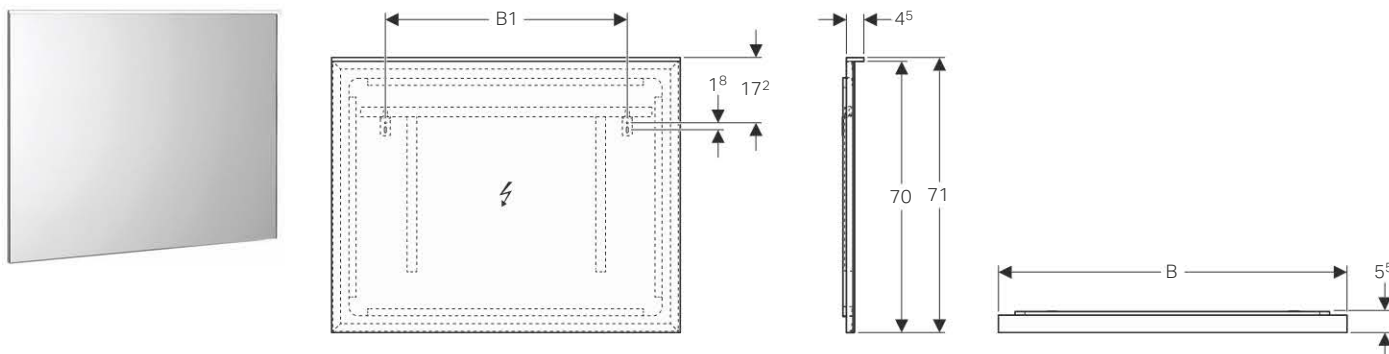

Characteristics

- LED lighting
- Indirect lighting
- Heated rear to prevent mirror steaming up
- Touch-sensor switch
- Dimmable

Technical data

Protection class	II
Protection degree	IP44
Nominal voltage	230 V AC
Mains frequency	50 Hz
Operating voltage	24 V DC
Material	Glass
Energy efficiency class	A++
Light colour	4000 K

Art. no.	B [cm]	B1 [cm]	H [cm]	T [cm]	Power consumption [W]	Luminous flux [lm]	Luminous flux, indirect [lm]	SU4 [pc.]	SU1 [pc.]	GBP/pc.
500.519.00.1	120	71.5	71	5.5	56	3213	2209	7	1	617.18
500.521.00.1	60	32.5	71	5.5	38	1572	1430	7	1	528.64
500.522.00.1	90	62.5	71	5.5	47	2392	1819	7	1	597.23

Available as of April 2017