iCON Modules

Choose the function
Select the module



The module concept which is unique to iCON, gives one the option of determining how you wish to control your fan and based on your requirement select the appropriate module. Airflow has invested extensively in the research and development of our modules to bring our customers the most versatile controllability available in the extractor fan market. Our extensive range of control functions has helped the iCON product range become the leading brand it is today.

The same module is compatible with all three size iCON's – 15, 30 and 60. However, it should be noted that there are specific 240 V modules and different low voltage SELV modules (please refer to the table below for details and part numbers of the various modules).

Replacing a module is also a lot simpler and cheaper than replacing the entire fan.

BASIC SWITCHING | TIMER | PULLCORD | HUMIDITY | MOTION SENSOR | DELAY START 2 MINS | 2 TWO SPEED

KEY FEATURES

BASIC SWITCHING CONTROL

Basic switching control provides simple on/off functionality for the fan. It is typically operated via a separate remote switch, but can also be wired to a light switch or activated using a pull cord. This module is included as standard with every iCON fan.

RUN ON TIMER CONTROL

Subject to wiring, the run on timer control means that the fan will continue to run after it has been switched off for a pre-set length of time. The run on timer function can be adjusted by the user from 1 to 30 minutes. It is designed to ensure that excess moisture is removed from the room.

PULL CORD CONTROL

With the pull cord control, the user is able to manually control their fan with an integral pull cord.

HUMIDITY TIMER CONTROL

The humidity timer function will trigger the fan to turn on once the humidity in the room reaches the levels pre-set by the user. It will continue to run until the humidity is below the pre-set levels to ensure that excess moisture is removed from the room.

MOTION SENSOR CONTROL

This function detects movement and will trigger the fan to come on when the room is in use. After the user has left the room and motion is no longer detected, the fan will continue running for 15 minutes before switching off automatically.

DELAY START CONTROL

The delay start feature enables you to prevent the fan from being activated when using the room for a quick visit. This feature can be adjusted from 2 to 45 minutes by the user.

TWO SPEED CONTROL

This function allows the user to choose between two speeds, a low or a high, with the flip of a switch. The user can also have the fan connected to the room light, which can be achieved by using a three-position switch.

Modules for use in 240 V iCON Fans		**iCON 15 - 72683501 iCON 30 - 72591601 iCON 60 - 72591701**
Part No.	Control	Function
72573602	**Pull Cord**	Manual on/off control by pull cord switch
72612601	**Timer**	Adjustable timer overrun between 1 and 30 minutes, activation via remote switch
72687103	**Pull Cord Timer Humidity**	Adjustable timer between 2-45 minutes with momentary pull cord to activate boost. Adjustable humidity setting between 40-90% RH
72687104	**Timer Motion Sensor**	Motion sensor activation with adjustable timer overrun between 1 and 30 minutes
72687102	**Timer Humidity Motion Sensor**	Motion sensor activation with adjustable humidity between 40 and 90% RH and adjustable timer overrun between 1 and 30 minutes
72675702	**Pull Cord Timer Delayed Start**	2 minute delayed start of fan after remote switch activation (ideal for quick visits) with an adjustable timer overrun between 2 and 45 minutes additional activation via included momentary pull cord
72675703	**2 Speed Humidity with Pull Cord Boost**	Remote light switch operation activates low speed. Boost speed activated by automatic humidity sensor (adjustable 40 - 90% RH) or manually by momentary cord
Modules for use in 12 V iCON SELV Fans with remote transformer		**iCON 15S - 72683701 iCON 30S - 72683801**
72573603	**Pull Cord**	Manual on/off control by pull cord switch
72574204	**Pull Cord Timer**	Adjustable timer overrun between 1 and 30 minutes, activation via remote switch or included momentary pull cord
72574202	**Pull Cord Timer Humidity**	Adjustable timer between 1-30 minutes with momentary pull cord to activate boost. Adjustable humidity setting between 40-90% RH
72574203	**Timer Motion Sensor**	Motion sensor activation with adjustable timer overrun between 1 and 30 minutes
72574201	**Timer Humidity Motion Sensor**	Motion sensor activation with adjustable humidity between 40 and 90% RH and adjustable timer overrun between 1 and 30 minutes
72682307	**Pull Cord Timer Delayed Start**	2 minute delayed start of fan after remote switch activation (ideal for quick visits) with an adjustable timer overrun between 2 and 45 minutes additional activation via included momentary pull cord

iCON

reddot design award

iCON®

Coloured Covers


White


Sandstone


Silver


Chrome*


Anthracite


Ultimate Grey


Turquoise


Navy Blue

* 15 only

Adding colour and style to your home with a coloured iCON cover

Colour Covers	iCON 15	iCON 30	iCON 60
Anthracite	52634503	52634506	52634509
Silver	52634504	52634507	52634510
Sandstone	52634505	52634508	52634511
Chrome	52634502	N/A	N/A
Ultimate Grey	52634514	52634517	52634520
Turquoise	52634515	52634518	52634521
Navy Blue	52634516	52634519	52634522

To complement the décor of your home, we also offer the flexibility to upgrade the white cover to Anthracite, Sandstone, Silver or Chrome (iCON 15 only). This is perfect for customers looking for a fan that blends seamlessly into the surroundings adding colour and co-ordination to any toilet, en-suite, bathroom, utility room or kitchen at a surprisingly low cost.

The covers are simple to fit and can be easily cleaned by simply wiping off with a damp cloth.

We are convinced that our exclusive design and product configuration possibilities, have contributed to iCON fans, modules and covers becoming one of the most successful brand names in the extractor fan business.







iCON

reddot design award

iCON has been designed with simplicity in mind. A quick, core drilled hole enables immediate fixing of iCON. The twist on/off cover requires only a single side entry fixing screw.



Cantilever fixing lugs enable recessed installation on uneven surfaces. iCON 30 and iCON 60 are also supplied with a narrow contour skirt for surface mounting if preferred.




The 'snap-in' module is quick to fit and wire, giving the installer a choice of controls on-site.



Modular versatility and simplicity. Select the fan, iCON 15, iCON 30, iCON 60 and add the module. Any module fits any fan.*

*subject to voltage

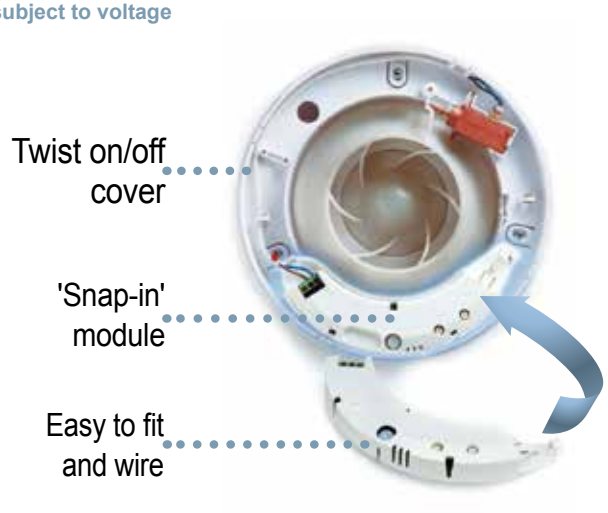

Wholesalers and Installers save too!

Designed with the busy contractor in mind with modular design and maximum fan choice, you save time and make more money. Just carry three basic fans and a range of inexpensive fan control modules to install fans quickly and move faster from site to site.


- Go from site to site
- Just carry three basic fans and a choice of control modules
- All modules fit all fans.*
- Reduce trips to the wholesaler for site-specific fans.

*subject to Voltage



Minimal stock and maximum choice equals more profit

Wholesalers only need to stock three basic fans and offer a range of control modules to...

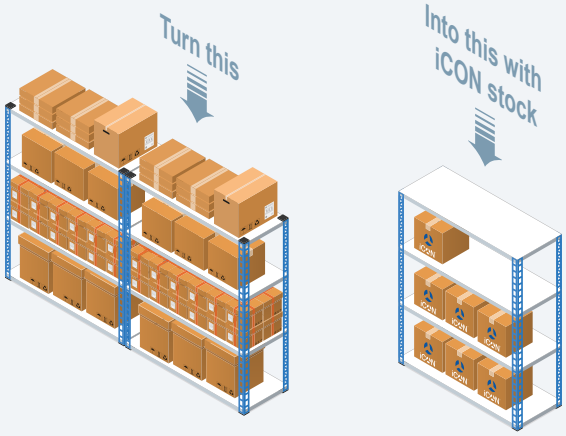

STOP using up valuable shelving space with boxes for every type of fan.

SAVE up to half your valuable shelving space by stocking three basic fans and a range of popular control modules.

Call: 01494 525252 **Visit: airflow.com**

80001413 - Issue 3 11/25

AIRFLOW

Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request

Certificate No. EMS 569454 BS EN ISO 14001 : 2015
Certificate No. FM 00152 BS EN ISO 9001 : 2015