

AQUALISA

S1 DUAL OUTLET SMART SHOWER

WITH WI-FI CONNECTED TECHNOLOGY AND LIGHT DIAL,
ADJUSTABLE HANDSET AND FIXED CEILING HEAD
GRAVITY

Chrome / Matt Black / Brushed Brass / Gunmetal Grey

S1C.HC.P


S1MB.HC.P

S1BB.HC.P


S1GG.HC.P

DIMENSIONAL DRAWINGS


S1 Dual Outlet Controller

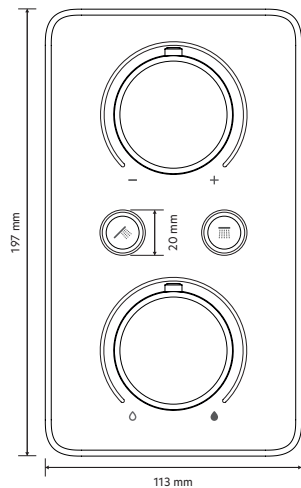


Rail Kit

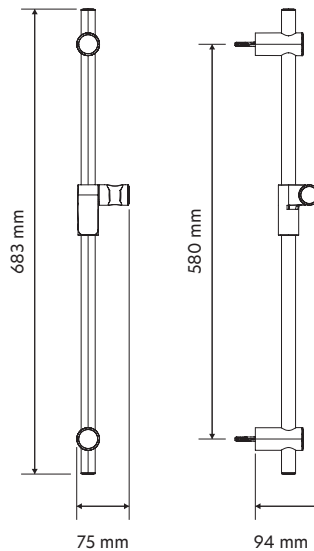


120mm Adjustable Handset

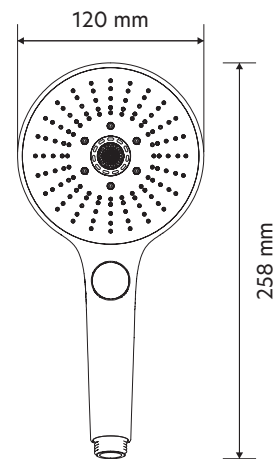


Wall Outlet

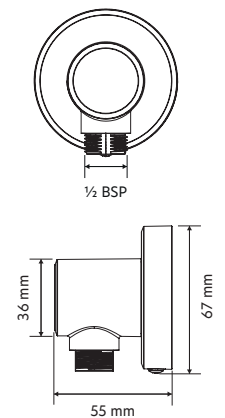


1.5m Hose





300mm Drencher

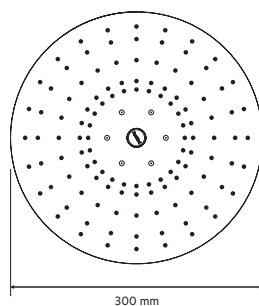

Pumped Dual Outlet SmartValve™ - Gravity

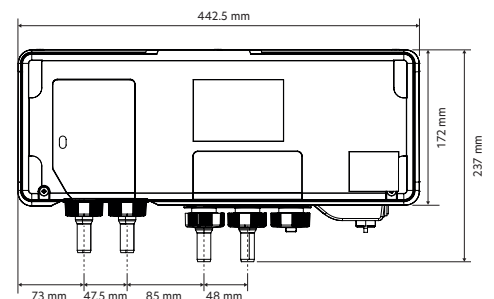

Ceiling Arm

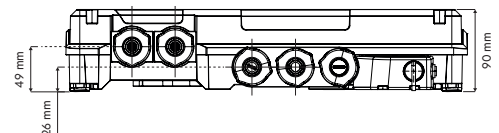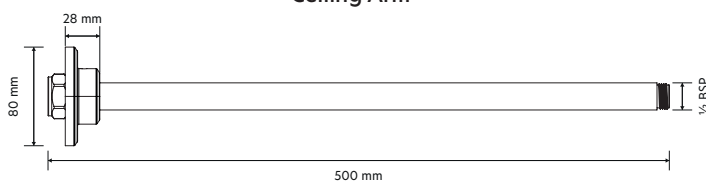

AQUALISA

S1 DUAL OUTLET SMART SHOWER

S1C.HC.P

S1MB.HC.P

S1BB.HC.P

S1GG.HC.P

WITH WI-FI CONNECTED TECHNOLOGY AND LIGHT DIAL,
ADJUSTABLE HANDSET AND FIXED CEILING HEAD
GRAVITY

Chrome / Matt Black / Brushed Brass / Gunmetal Grey

TECHNICAL SPECIFICATIONS

| | |
|--|---|
| Minimum pressure requirements | For optimal performance the Aqualisa SmartValve™ should be sited 1m below the base level of the cold water system (Gravity) |
| Maximum pressure requirements | 1 Bar (Gravity) |
| Aqualisa SmartValve™ inlet fitting connections | 15mm push fit fittings, valve inlet centres 47.5mm, inlet supply positions – hot right, cold left |
| Aqualisa SmartValve™ outlet fitting connection | 15mm push fit |
| Permissible Aqualisa SmartValve™ siting location | Airing cupboard, under bath, loft |
| Supply temperature | Cold inlet temperature 1°C (minimum) Cold inlet temperature 15°C (maximum) Hot inlet temperature 65°C (maximum) |
| Water system | Gravity |
| Features | Temperature and flow control dial with lighting indication |
| | Illuminated push buttons |
| | Metal faceplate and dials including mood backlighting, adjustable via app |
| | Lighting indicator to let you know when your chosen temperature has been reached |
| | Wifi, Mobile App, Google Home & Amazon Alexa enabled to allow you to control your shower remotely |
| | 300mm Fixed and 120mm 3 spray adjustable head with push button spray selector |
| Guarantee period | 5-year guarantee - shower unit |
| | 2-year guarantee - shower head and kit |
| Approvals | CE Marking |
| | UKCA |
| | BEAB |